


# PEMKO® EDGING STITCH HARD ANODISED ALUMINIUM



<b>TYPE</b>	Edging
<b>RANGE</b>	Designer Stair Edging
<b>DESIGN</b>	Stitch
<b>MATERIAL</b>	6063 T5 extruded aluminium alloy
<b>FINISH</b>	Hard anodised

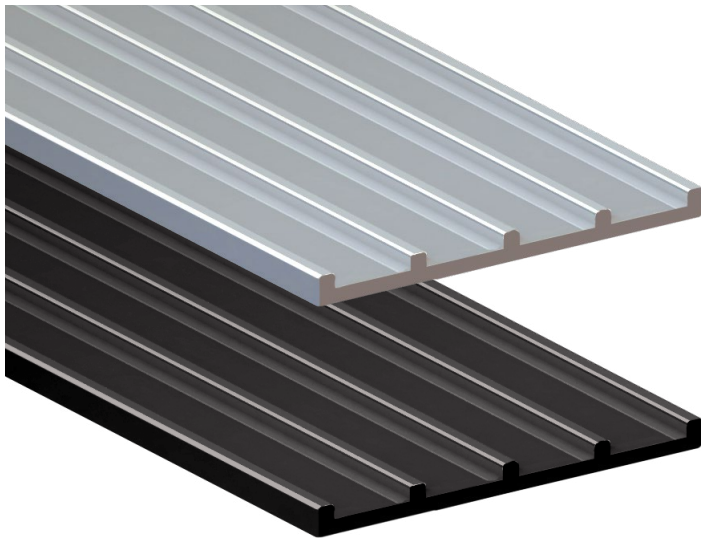

## FEATURES

- Extruded continuous stitch pattern designed by DTAC in Australia
- Available in exclusive premium quality flat, angle or carpet profiles
- Suitable for all stable finished indoor surfaces and substrates
- Complies with the NCC (D3.3 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions
- Complies with slip resistance requirements as detailed in HB 198
- Backed by 2 year warranty

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

<b>TEST</b>	AS 4586 APPENDIX A: Wet Pendulum Test
<b>FOUR S 96 SLIDER</b>	= 61 <b>CLASS</b> = P5
<b>TRL 55 SLIDER</b>	= 56 <b>CLASS</b> = P5
<b>TEST</b>	AS 4586 APPENDIX B: Dry Floor Friction Test
<b>MEAN COF</b>	= 0.55 <b>CLASS</b> = D1
<b>TEST</b>	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
<b>MEAN ANGLE OF INCLINATION</b>	= 31° <b>CLASS</b> = C
<b>TEST</b>	AS 4586 APPENDIX D: Oil/Wet Ramp Test
<b>CORRECTED MEAN OVERALL ACCEPTANCE ANGLE</b>	= 13.1° <b>CLASS</b> = R10

## LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS 1428.1 Appendix B.

<b>TEST</b>	AS 1428.1 APPENDIX B PARAGRAPH B3
<b>NATURAL</b>	
<b>LUMINANCE REFLECTANCE RATING / WET</b>	= 60.0
<b>LUMINANCE REFLECTANCE RATING / DRY</b>	= 58.0
<b>BLACK</b>	
<b>LUMINANCE REFLECTANCE RATING / WET</b>	= 5.1
<b>LUMINANCE REFLECTANCE RATING / DRY</b>	= 5.7

DTAC PTY LTD  
ABN 41 093 070 127

PEMKO®

Unit 4, 11-12 Phillip Court  
Port Melbourne Victoria  
Australia 3207

T 1300 793 478  
F 1300 780 628

PO Box 5059  
South Melbourne Victoria  
Australia 3205


estimating@dtac.com.au  
www.dtac.com.au

© DTAC Pty Ltd 2020

# PEMKO® EDGING STITCH FINISHES & SIZES

## DESIGNER STAIR EDGING - AVAILABLE SIZES

### HARD NATURAL ANODISED



**CODE** DE0400C


**SIZE** W50 x T3 - L2500

### HARD BLACK ANODISED



**CODE** DE0400B

**SIZE** W50 x T3 - L2500



**CODE** DE0410C

**SIZE** H10 x W50 x T3 - L2500



**CODE** DE0410B

**SIZE** H10 x W50 x T3 - L2500

## AVAILABLE FINISHES


### HARD NATURAL ANODISED (25µm)



### HARD BLACK ANODISED (40µm)



## STAIR EDGING SYSTEMS FOR CARPET - AVAILABLE SIZES

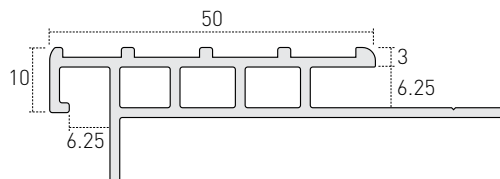


**CODE** DE0660C

**SIZE** H10 x W50 x T3 - L2500

Accepts carpet thickness of 6-10mm - carpet rebate 6.25mm

Colour matched escutcheon plates available for stairs with exposed ends



Escutcheon Plate


**CODE** DESC01

**SIZE** H10 x W50 x T2.5


# PEMKO® EDGING STITCH

## INSTALLATION & APPLICATION

**SUBSTRATE** Stone / Masonry / Timber / Vinyl



**FIXING** Adhesive




**FIXING** Adhesive

**SUBSTRATE** Vitrified Porcelain / Ceramics / Glass / Metals



**FIXING** Adhesive


*NOTE* Ensure grout line is discrete as illustrated



**FIXING** Adhesive

*NOTE* Ensure grout line is discrete as illustrated

**SUBSTRATE** Carpet / Carpet Tiles

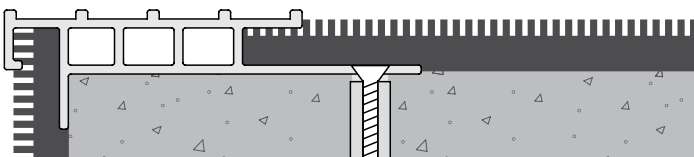

**FIXING** Screw-fixed or adhesive (screws and plugs supplied)

*NOTE* DTAC screw-fix mounting methods are available on request