


EDGING URBAN MILL FINISHED ALUMINIUM



TYPE	Edging
RANGE	Designer Stair Edging
DESIGN	Urban
MATERIAL	6063 T5 extruded aluminium alloy with silicon carbide infill
FINISH	Mill Finished

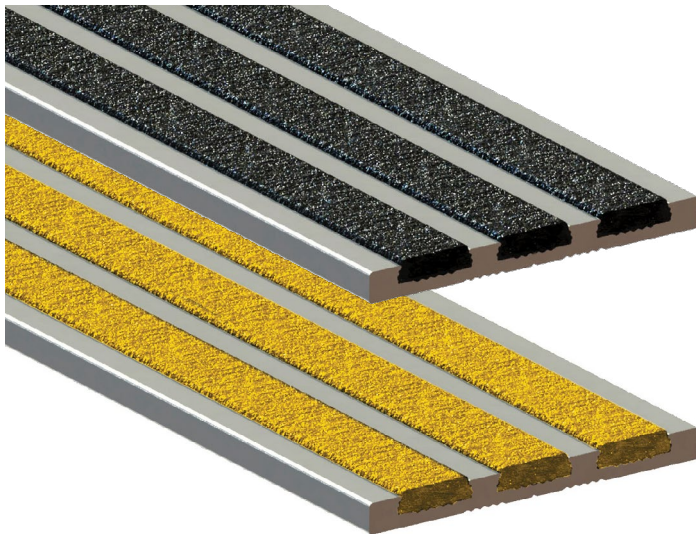

FEATURES

Intermittent striations of hard wearing, solid silicon carbide inserted into aluminium extrusions designed by DTAC in Australia

Available in exclusive premium quality flat or angle profiles

Suitable for all stable finished outdoor or indoor surfaces and substrates

Complies with Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

Backed by 2 year warranty

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 77 CLASS = P5
TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= 0.75 CLASS = D1
TEST	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
MEAN ANGLE OF INCLINATION	= 37° CLASS = C
TEST	AS 4586 APPENDIX D: Oil/Wet Ramp Test
CORRECTED MEAN OVERALL ACCEPTANCE ANGLE	= 33° CLASS = R12

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS 1428.1 Appendix B.

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
BLACK	
LUMINANCE REFLECTANCE RATING / WET	= 2.6
LUMINANCE REFLECTANCE RATING / DRY	= 3.6
YELLOW	
LUMINANCE REFLECTANCE RATING / WET	= 42.9
LUMINANCE REFLECTANCE RATING / DRY	= 45.0

FIRE TESTING

Important information: The results displayed in this document relate to the behaviour and environment of the product in the conditions to which the test was carried out. This is not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

TEST	AS/ISO 9239.1: Reaction to Fire Tests for Floor Coverings
MEAN DISTANCE OF FLAME TRAVEL	= 5mm
AVERAGE CRITICAL RADIANT FLUX	= ≥ 11kW/m2
AVERAGE INTEGRATED SMOKE VALUE	= 2% x min

DTAC PTY LTD
ABN 41 093 070 127

PEMKO®

Unit 4, 11-12 Phillip Court
Port Melbourne Victoria
Australia 3207

T 1300 793 478
F 1300 780 628

PO Box 5059
South Melbourne Victoria
Australia 3205


estimating@dtac.com.au
www.dtac.com.au

© DTAC Pty Ltd 2018

EDGING URBAN FINISHES & SIZES

DESIGNER STAIR EDGING - AVAILABLE SIZES


MILL FINISHED

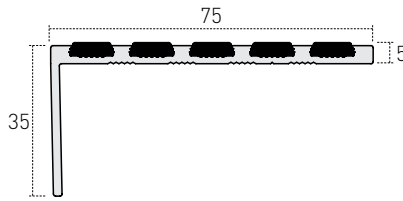

CODE DE0710MF

SIZE H35 x W75 x T5 - L3000

NON-NCC COMPLIANT




CODE DE0750MF

SIZE H10 x W75 x T5 - L3000

NON-NCC COMPLIANT

AVAILABLE FINISHES

MILL FINISHED WITH BLACK INFILL

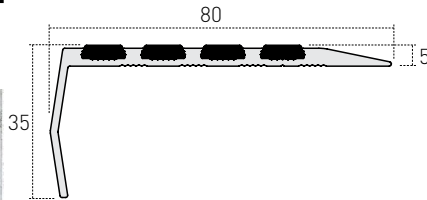

CODE DE0720MF

SIZE H35 x W80 x T5 - L3000

NON-NCC COMPLIANT




CODE DE0760MF

SIZE W50 x T5 - L3000

NON-NCC COMPLIANT


MILL FINISHED WITH YELLOW INFILL

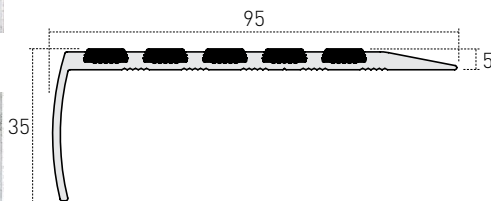

CODE DE0730MF

SIZE H35 x W95 x T5 - L3000

NON-NCC COMPLIANT



CODE DE0760MFY

SIZE W50 x T5 - L3000

NON-NCC COMPLIANT




CODE DE0740MF

SIZE H35 x W135 x T5 - L3000

NON-NCC COMPLIANT


EDGING URBAN INSTALLATION & APPLICATION

SUBSTRATE Stone / Masonry / Timber / Vinyl




FIXING Adhesive. Optional screw-fix (colour matched screws and plugs supplied)

NON-NCC COMPLIANT




FIXING Adhesive. Optional screw-fix (colour matched screws and plugs supplied)

NON-NCC COMPLIANT




FIXING Adhesive. Optional screw-fix (colour matched screws and plugs supplied)

NON-NCC COMPLIANT




FIXING Adhesive. Optional screw-fix (colour matched screws and plugs supplied)

NON-NCC COMPLIANT



FIXING Adhesive. Optional screw-fix (colour matched screws and plugs supplied)


NON-NCC COMPLIANT



FIXING Adhesive. Optional screw-fix (colour matched screws and plugs supplied*)


NON-NCC COMPLIANT

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals




FIXING Adhesive. Optional screw-fix (colour matched screws and plugs supplied)

NON-NCC COMPLIANT




FIXING Adhesive. Optional screw-fix (colour matched screws and plugs supplied)

NON-NCC COMPLIANT




FIXING Adhesive. Optional screw-fix (colour matched screws and plugs supplied)

NON-NCC COMPLIANT



FIXING Adhesive. Optional screw-fix (colour matched screws and plugs supplied)


NON-NCC COMPLIANT



FIXING Adhesive. Optional screw-fix (colour matched screws and plugs supplied)

NOTE Ensure grout line is discrete as illustrated

NON-NCC COMPLIANT



FIXING Adhesive. Optional screw-fix (colour matched screws and plugs supplied*)

NOTE Ensure grout line is discrete as illustrated

NON-NCC COMPLIANT

*Colour matched screws for DE0760MF only.