


# EDGING CORDUROY HARD ANODISED ALUMINIUM



<b>TYPE</b>	Edging
<b>RANGE</b>	Designer Stair Edging
<b>DESIGN</b>	Corduroy
<b>MATERIAL</b>	6063 T5 extruded aluminium alloy
<b>FINISH</b>	Hard anodised

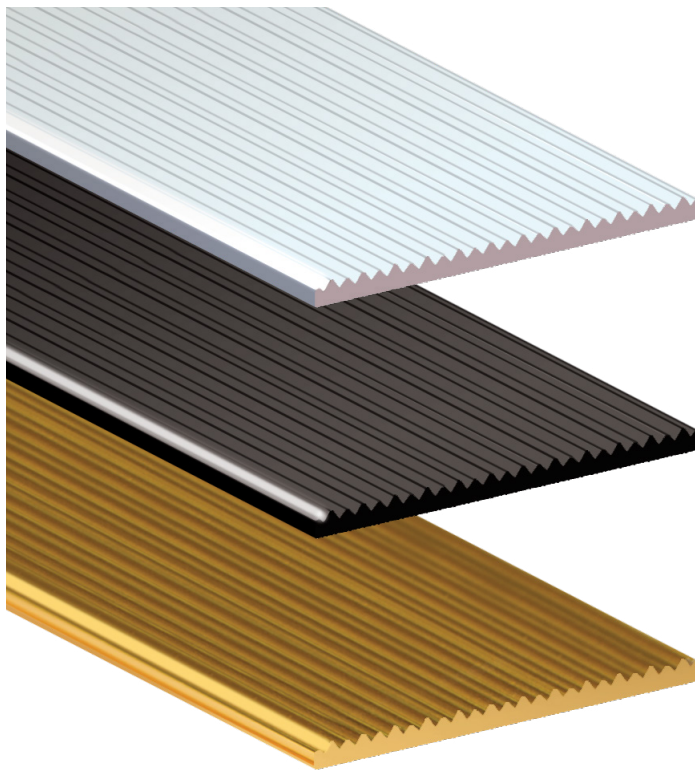

## FEATURES

- Extruded continuous corduroy pattern designed by DTAC in Australia
- Available in exclusive premium quality flat, angle or carpet profiles
- Suitable for all stable finished indoor or outdoor surfaces and substrates (DE0100, DE0110 & DE0630 only)
- Complies with the NCC (D3.3 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions
- Complies with slip resistance requirements as detailed in HB 198
- Backed by 2 year warranty

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

<b>TEST</b>	AS 4586 APPENDIX A: Wet Pendulum Test
<b>FOUR S 96 SLIDER</b>	= 63 <b>CLASS</b> = P5
<b>TRL 55 SLIDER</b>	= 66 <b>CLASS</b> = P5
<b>TEST</b>	AS 4586 APPENDIX B: Dry Floor Friction Test
<b>MEAN COF</b>	= 0.55 <b>CLASS</b> = D1
<b>TEST</b>	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
<b>MEAN ANGLE OF INCLINATION</b>	= 33° <b>CLASS</b> = C
<b>TEST</b>	AS 4586 APPENDIX D: Oil/Wet Ramp Test
<b>CORRECTED MEAN OVERALL ACCEPTANCE ANGLE</b>	= 31.7° <b>CLASS</b> = R12

## LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS 1428.1 Appendix B.

<b>TEST</b>	AS 1428.1 APPENDIX B PARAGRAPH B3
<b>NATURAL</b>	
<b>LUMINANCE REFLECTANCE RATING / WET</b>	= 42.3
<b>LUMINANCE REFLECTANCE RATING / DRY</b>	= 41.4
<b>BLACK</b>	
<b>LUMINANCE REFLECTANCE RATING / WET</b>	= 2.8
<b>LUMINANCE REFLECTANCE RATING / DRY</b>	= 3.4
<b>GOLD</b>	
<b>LUMINANCE REFLECTANCE RATING / WET</b>	= 41.9
<b>LUMINANCE REFLECTANCE RATING / DRY</b>	= 44.5

DTAC PTY LTD  
ABN 41 093 070 127

PEMKO®

Unit 4, 11-12 Phillip Court  
Port Melbourne Victoria  
Australia 3207

T 1300 793 478  
F 1300 780 628

PO Box 5059  
South Melbourne Victoria  
Australia 3205


estimating@dtac.com.au  
www.dtac.com.au

© DTAC Pty Ltd 2018

# EDGING CORDUROY FINISHES & SIZES

## DESIGNER STAIR EDGING - AVAILABLE SIZES


### HARD NATURAL ANODISED



**CODE** DE0100C  
**SIZE** W50 x T3 - L2500

**NCC COMPLIANT**


### HARD BLACK ANODISED



**CODE** DE0100B  
**SIZE** W50 x T3 - L2500


**NCC COMPLIANT**

### GOLD ANODISED



**CODE** DE0100G  
**SIZE** W50 x T3 - L2500

**NCC COMPLIANT**

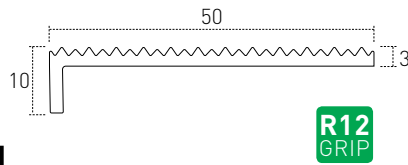


**CODE** DE0110C  
**SIZE** H10 x W50 x T3 - L2500

**NCC COMPLIANT**



**CODE** DE0110B  
**SIZE** H10 x W50 x T3 - L2500

**NCC COMPLIANT**

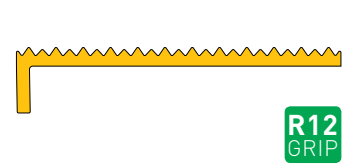

**CODE** DE0110G  
**SIZE** H10 x W50 x T3 - L2500

**NCC COMPLIANT**

## AVAILABLE FINISHES



### HARD NATURAL ANODISED (25µm)



### HARD BLACK ANODISED (40µm)




### GOLD ANODISED (10µm)

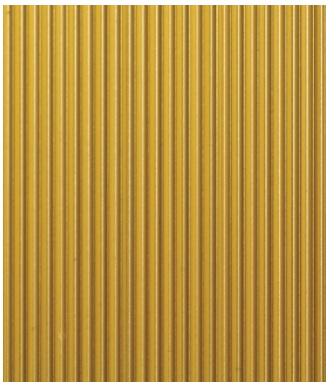


**CODE** DE0130C  
**SIZE** H30 x W30 x T3 - L2500

**NCC COMPLIANT**




**CODE** DE0130B  
**SIZE** H30 x W30 x T3 - L2500

**NCC COMPLIANT**

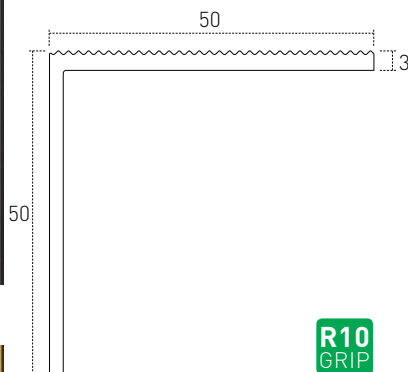

**CODE** DE0120C  
**SIZE** H50 x W50 x T3 - L2500

**NCC COMPLIANT**

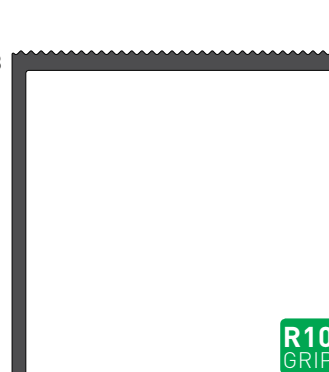


**CODE** DE0120B  
**SIZE** H50 x W50 x T3 - L2500

**NCC COMPLIANT**

# EDGING CORDUROY FINISHES & SIZES

## STAIR EDGING SYSTEMS FOR CARPET

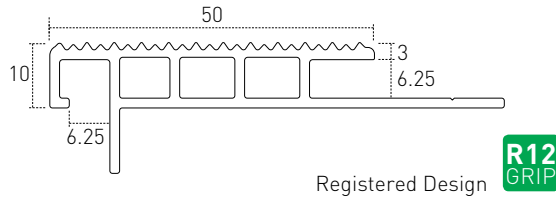


**CODE** DE0630C

**SIZE** H10 x W50 x T3 - L2500

Accepts carpet thickness of 6-10mm - carpet rebate 6.25mm

Colour matched escutcheon plates available for stairs with exposed ends

**NCC COMPLIANT**




Escutcheon Plate

**CODE** DESC01

**SIZE** H10 x W50 x T2.5

### AVAILABLE FINISHES

#### HARD NATURAL ANODISED (25µm)

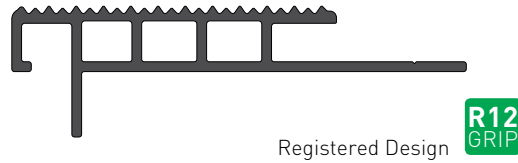

**CODE** DE0630B


**SIZE** H10 x W50 x T3 - L2500

Accepts carpet thickness of 6-10mm - carpet rebate 6.25mm

Escutcheon plates available for stairs with exposed ends

**NCC COMPLIANT**

#### HARD BLACK ANODISED (40µm)

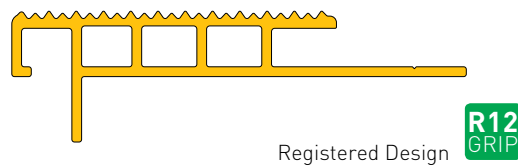

**CODE** DE0630G


**SIZE** H10 x W50 x T3 - L2500

Accepts carpet thickness of 6-10mm - carpet rebate 6.25mm

Escutcheon plates available for stairs with exposed ends


**NCC COMPLIANT**

#### GOLD ANODISED (10µm)

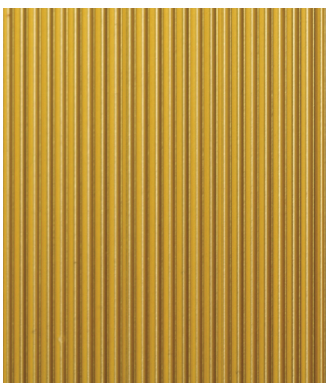


# EDGING CORDUROY INSTALLATION & APPLICATION

## SUBSTRATE Stone / Masonry / Timber / Vinyl




FIXING Adhesive

**NCC COMPLIANT**




FIXING Adhesive

**NCC COMPLIANT**




FIXING Adhesive



FIXING Adhesive


## SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



FIXING Adhesive

NOTE Ensure grout line is discrete as illustrated


**NCC COMPLIANT**




FIXING Adhesive

NOTE Ensure grout line is discrete as illustrated

**NCC COMPLIANT**




FIXING Adhesive



FIXING Adhesive

## SUBSTRATE Carpet / Carpet Tiles

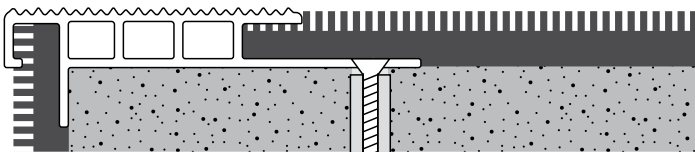

FIXING Screw-fixed or adhesive (screws and plugs supplied)

NOTE DTAC screw-fix mounting methods are available on request

**NCC COMPLIANT**