


PEMKO® EDGING CORDUROY HARD ANODISED ALUMINIUM



TYPE	Edging
RANGE	Designer Stair Edging
DESIGN	Corduroy
MATERIAL	6063 T5 extruded aluminium alloy
FINISH	Hard anodised

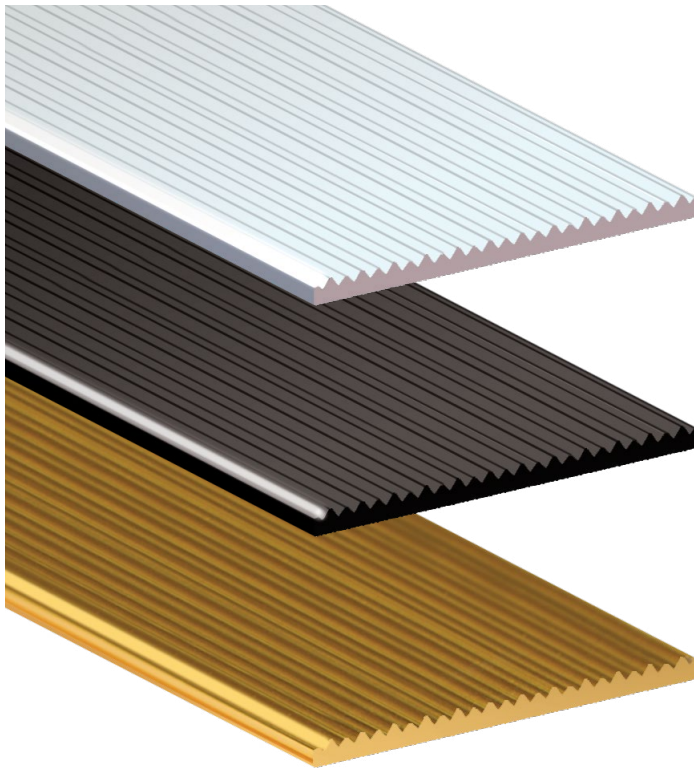

FEATURES

- Extruded continuous corduroy pattern designed by DTAC in Australia
- Available in exclusive premium quality flat, angle or carpet profiles
- Suitable for all stable finished indoor or outdoor surfaces and substrates
- Complies with the NCC (D3.3 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions
- Complies with slip resistance requirements as detailed in HB 198
- Backed by 2 year warranty

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 63 CLASS = P5
TRL 55 SLIDER	= 66 CLASS = P5
TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= 0.55 CLASS = D1
TEST	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
MEAN ANGLE OF INCLINATION	= 33° CLASS = C
TEST	AS 4586 APPENDIX D: Oil/Wet Ramp Test
CORRECTED MEAN OVERALL ACCEPTANCE ANGLE	= 31.7° CLASS = R12

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS 1428.1 Appendix B.

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
NATURAL	
LUMINANCE REFLECTANCE RATING / WET	= 42.3
LUMINANCE REFLECTANCE RATING / DRY	= 41.4
BLACK	
LUMINANCE REFLECTANCE RATING / WET	= 2.8
LUMINANCE REFLECTANCE RATING / DRY	= 3.4
GOLD	
LUMINANCE REFLECTANCE RATING / WET	= 41.9
LUMINANCE REFLECTANCE RATING / DRY	= 44.5

DTAC PTY LTD
ABN 41 093 070 127

PEMKO®

Unit 4, 11-12 Phillip Court
Port Melbourne Victoria
Australia 3207

T 1300 793 478
F 1300 780 628

PO Box 5059
South Melbourne Victoria
Australia 3205


estimating@dtac.com.au
www.dtac.com.au

© DTAC Pty Ltd 2020

PEMKO® EDGING CORDUROY FINISHES & SIZES

DESIGNER STAIR EDGING - AVAILABLE SIZES

HARD NATURAL ANODISED



Registered Design

CODE DE0100C
SIZE W50 x T3 - L3200

HARD BLACK ANODISED



Registered Design

CODE DE0100B
SIZE W50 x T3 - L3200

GOLD ANODISED



Registered Design

CODE DE0100G
SIZE W50 x T3 - L2500

AVAILABLE FINISHES


HARD NATURAL ANODISED (25µm)



HARD BLACK ANODISED (40µm)




GOLD ANODISED (10µm)




Registered Design

CODE DE0110C
SIZE H10 x W50 x T3 - L3200



Registered Design


CODE DE0110B
SIZE H10 x W50 x T3 - L3200



Registered Design

CODE DE0110G
SIZE H10 x W50 x T3 - L2500

STAIR EDGING SYSTEMS FOR CARPET - AVAILABLE SIZES

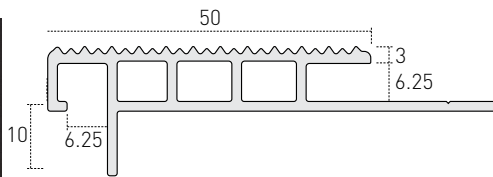


Registered Design

CODE DE0630C
SIZE H10 x W50 x T3 - L3200


Accepts carpet thickness of 6-10mm - carpet rebate 6.25mm

Colour matched escutcheon plates available for stairs with exposed ends



Escutcheon Plate

CODE DESC01
SIZE H10 x W50 x T2.5




Registered Design

CODE DE0630B
SIZE H10 x W50 x T3 - L3200

Accepts carpet thickness of 6-10mm - carpet rebate 6.25mm

Escutcheon plates available for stairs with exposed ends



Registered Design


CODE DE0630G
SIZE H10 x W50 x T3 - L2500

Accepts carpet thickness of 6-10mm - carpet rebate 6.25mm


Escutcheon plates available for stairs with exposed ends

PEMKO® EDGING CORDUROY INSTALLATION & APPLICATION

SUBSTRATE Stone / Masonry / Timber / Vinyl




FIXING Adhesive




FIXING Adhesive

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



FIXING Adhesive


NOTE Ensure grout line is discrete as illustrated



FIXING Adhesive

NOTE Ensure grout line is discrete as illustrated

SUBSTRATE Carpet / Carpet Tiles

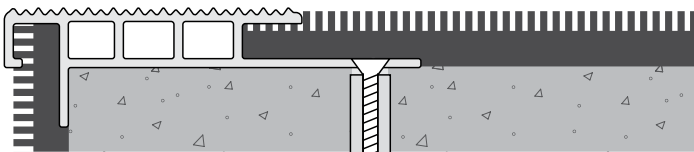

FIXING Screw-fixed or adhesive (screws and plugs supplied)

NOTE DTAC screw-fix mounting methods are available on request