


EDGING PINSTRIPE HARD ANODISED ALUMINIUM



TYPE	Edging
RANGE	Designer Stair Edging
DESIGN	Pinstripe
MATERIAL	6063 T5 extruded aluminium alloy
FINISH	Hard anodised

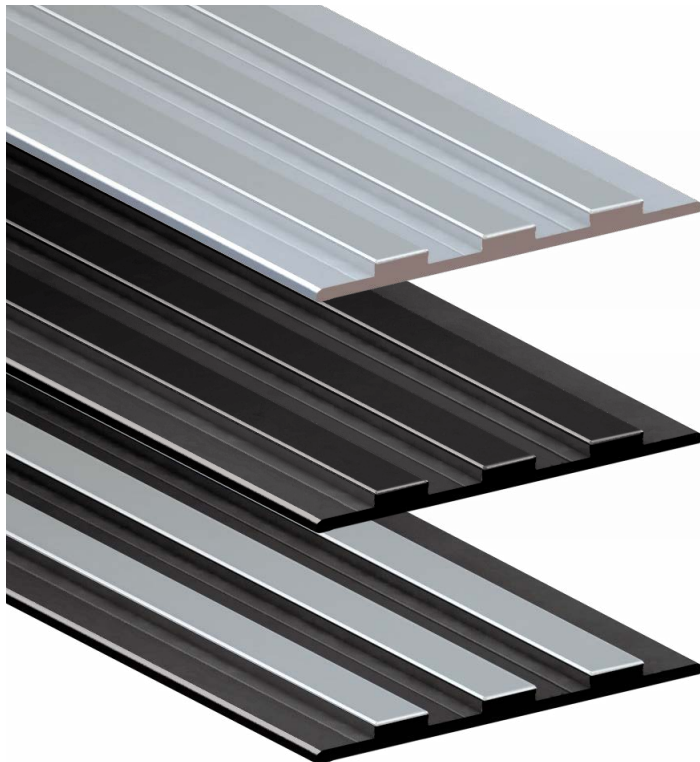

FEATURES

Extruded intermittent high and low, smooth blunt edge plates designed by DTAC in Australia

Available in exclusive premium quality flat, angle or carpet profiles

Suitable for all stable finished indoor surfaces and substrates

Complies with the NCC (D3.3 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

Backed by 2 year warranty

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 54 CLASS = P4
TRL 55 SLIDER	= 51 CLASS = P4
TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= 0.55 CLASS = D1
TEST	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
MEAN ANGLE OF INCLINATION	= 31° CLASS = C
TEST	AS 4586 APPENDIX D: Oil/Wet Ramp Test
CORRECTED MEAN OVERALL ACCEPTANCE ANGLE	= 11.6° CLASS = R10

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS 1428.1 Appendix B.

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
NATURAL	
LUMINANCE REFLECTANCE RATING / WET	= 64.6
LUMINANCE REFLECTANCE RATING / DRY	= 63.7
BLACK	
LUMINANCE REFLECTANCE RATING / WET	= 5.0
LUMINANCE REFLECTANCE RATING / DRY	= 5.8

DTAC PTY LTD
ABN 41 093 070 127

PEMKO®

Unit 4, 11-12 Phillip Court
Port Melbourne Victoria
Australia 3207

T 1300 793 478
F 1300 780 628

PO Box 5059
South Melbourne Victoria
Australia 3205


estimating@dtac.com.au
www.dtac.com.au

© DTAC Pty Ltd 2019

EDGING PINSTRIPE FINISHES & SIZES

DESIGNER STAIR EDGING - AVAILABLE SIZES

HARD NATURAL ANODISED



CODE DE0200C
SIZE W50 x T3 - L2500

NCC COMPLIANT


HARD BLACK ANODISED




CODE DE0200B
SIZE W50 x T3 - L2500

NCC COMPLIANT

BLACK BRUSHED




CODE DE0200BB
SIZE W50 x T3 - L2500




CODE DE0210C
SIZE H10 x W50 x T3 - L3200

NCC COMPLIANT



CODE DE0210B
SIZE H10 x W50 x T3 - L2500


NCC COMPLIANT



CODE DE0210BB
SIZE H10 x W50 x T3 - L2500

AVAILABLE FINISHES


HARD NATURAL ANODISED (25µm)

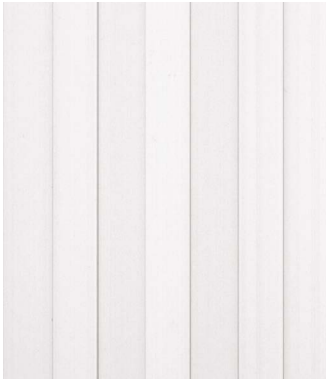


HARD BLACK ANODISED (40µm)




BLACK BRUSHED (40µm)




CODE DE0220C
SIZE H30 x W30 x T3 - L2500



CODE DE0220B
SIZE H30 x W30 x T3 - L2500




CODE DE0220BB
SIZE H30 x W30 x T3 - L2500

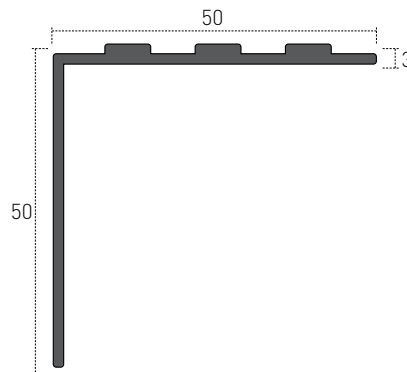

CODE DE0230B
SIZE H50 x W50 x T3 - L2500

STAIR EDGING SYSTEMS FOR CARPET - AVAILABLE SIZES

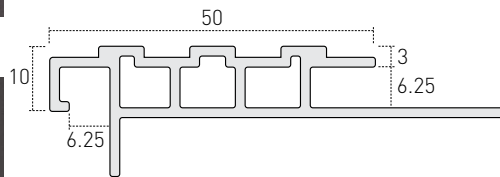


Registered Design

CODE DE0640C
SIZE H10 x W50 x T3 - L2500

Accepts carpet thickness of 6-10mm - carpet rebate 6.25mm

Colour matched escutcheon plates available for stairs with exposed ends

NCC COMPLIANT




Escutcheon Plate

CODE DESC01

SIZE H10 x W50 x T2.5


EDGING PINSTRIPE INSTALLATION & APPLICATION

SUBSTRATE Stone / Masonry / Timber / Vinyl




FIXING Adhesive

NCC COMPLIANT
NATURAL & BLACK ONLY




FIXING Adhesive

NCC COMPLIANT
NATURAL & BLACK ONLY



FIXING Adhesive



FIXING Adhesive

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



FIXING Adhesive

NOTE Ensure grout line is discrete as illustrated


NCC COMPLIANT
NATURAL & BLACK ONLY



FIXING Adhesive

NOTE Ensure grout line is discrete as illustrated

NCC COMPLIANT
NATURAL & BLACK ONLY




FIXING Adhesive



FIXING Adhesive

SUBSTRATE Carpet / Carpet Tiles

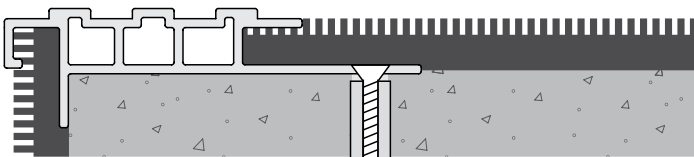

FIXING Screw-fixed or adhesive (screws and plugs supplied)

NOTE DTAC screw-fix mounting methods are available on request

NCC COMPLIANT