


EDGING URBAN YELLOW HARD ANODISED ALUMINIUM



TYPE	Edging
RANGE	Designer Stair Edging
DESIGN	Urban Yellow
MATERIAL	6063 T5 extruded aluminium alloy with silicon carbide infill
FINISH	Hard anodised

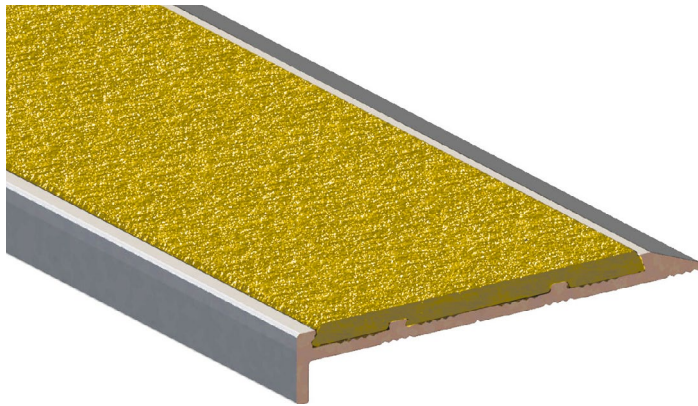

FEATURES

- Continuous band of hard wearing, solid silicon carbide inserted into aluminium extrusions designed by DTAC in Australia
- Available in an exclusive premium quality angle profile
- Suitable for all stable finished outdoor or indoor surfaces and substrates
- Complies with the NCC (D3.3 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions
- Complies with slip resistance requirements as detailed in HB 198
- Backed by 2 year warranty

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 58 CLASS = P5

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS 1428.1 Appendix B.

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
LUMINANCE REFLECTANCE RATING / WET	= 35.9
LUMINANCE REFLECTANCE RATING / DRY	= 35.6

DTAC PTY LTD
ABN 41 093 070 127

PEMKO®

Unit 4, 11-12 Phillip Court
Port Melbourne Victoria
Australia 3207

T 1300 793 478
F 1300 780 628

PO Box 5059
South Melbourne Victoria
Australia 3205


estimating@dtac.com.au
www.dtac.com.au

© DTAC Pty Ltd 2018

EDGING URBAN YELLOW FINISHES & SIZES

DESIGNER STAIR EDGING - AVAILABLE SIZE

HARD NATURAL ANODISED WITH YELLOW INFILL



CODE DE0700CY

SIZE H10 x W65 x T5 - L2500

NCC COMPLIANT


AVAILABLE FINISHES

**HARD NATURAL ANODISED (25µm)
WITH YELLOW INFILL**



EDGING URBAN YELLOW INSTALLATION & APPLICATION


SUBSTRATE Stone / Masonry / Timber / Vinyl



FIXING Adhesive. Optional screw-fix (screws and plugs supplied)

NCC COMPLIANT

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



FIXING Adhesive. Optional screw-fix (screws and plugs supplied)

NOTE Ensure grout line is discrete as illustrated

NCC COMPLIANT