


PEMKO® URBAN EDGING (10X65X5)

PRODUCT CODES: DESCRIPTION:

DE0700BMF **NATURAL ANODISED**
Black silicon carbide infill

TYPE	Edging
RANGE	Designer Stair Edging
DESIGN	Urban
MATERIAL	6063 T5 extruded aluminium alloy with silicon carbide infill
FINISH	Hard anodised
LOCATION	Indoor or outdoor

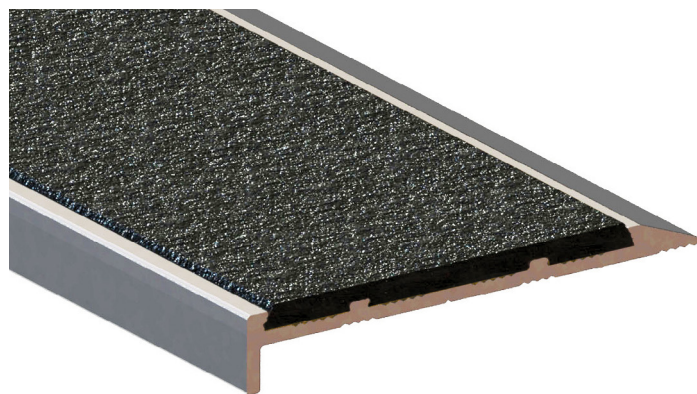

FEATURES

Continuous band of hard wearing, solid silicon carbide inserted into aluminium extrusions designed by DTAC in Australia

Available in exclusive premium quality angle profiles

Suitable for all stable finished outdoor or indoor surfaces and substrates

Complies with the NCC (D3.3 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

Backed by a 2 year warranty

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST AS 4586 APPENDIX A: Wet Pendulum Test

FOUR S 96 SLIDER = 78 **CLASS** = P5

TEST AS 4586 APPENDIX B: Dry Floor Friction Test

MEAN COF = 0.90 **CLASS** = D1

TEST AS 4586 APPENDIX C: Wet/Barefoot Ramp Test

MEAN ANGLE OF INCLINATION = 36° **CLASS** = C

TEST AS 4586 APPENDIX D: Oil/Wet Ramp Test

CORRECTED MEAN OVERALL ACCEPTANCE ANGLE = 36° **CLASS** = R13

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS 1428.1 Appendix B.

TEST AS 1428.1 APPENDIX B PARAGRAPH B3

LUMINANCE REFLECTANCE RATING / WET = 3.6

LUMINANCE REFLECTANCE RATING / DRY = 3.8

PEMKO®

URBAN EDGING

(10X65X5)

FINISHES & SIZES

AVAILABLE SIZES

HARD NATURAL ANODISED WITH BLACK INFILL



CODE DE0700BMF

SIZE H10 x W65 x T5 - L3200


AVAILABLE FINISHES

HARD NATURAL ANODISED (25µM)



PEMKO® URBAN EDGING (10X65X5) INSTALLATION & APPLICATION


SUBSTRATE Stone / Masonry / Timber / Vinyl



CODE DE0700BMF

FIXING Adhesive. Optional
screw-fix (colour matched
screws and plugs
supplied)

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



CODE DE0700BMF

FIXING Adhesive. Optional
screw-fix (colour matched
screws and plugs
supplied)

NOTE Ensure grout line is
discrete as illustrated