




DTAC®

ARCHITECTURAL FLOOR TACTILES,  
STAIR TREADS & EDGING SOLUTIONS

2022

PRODUCTS &  
SERVICES GUIDE

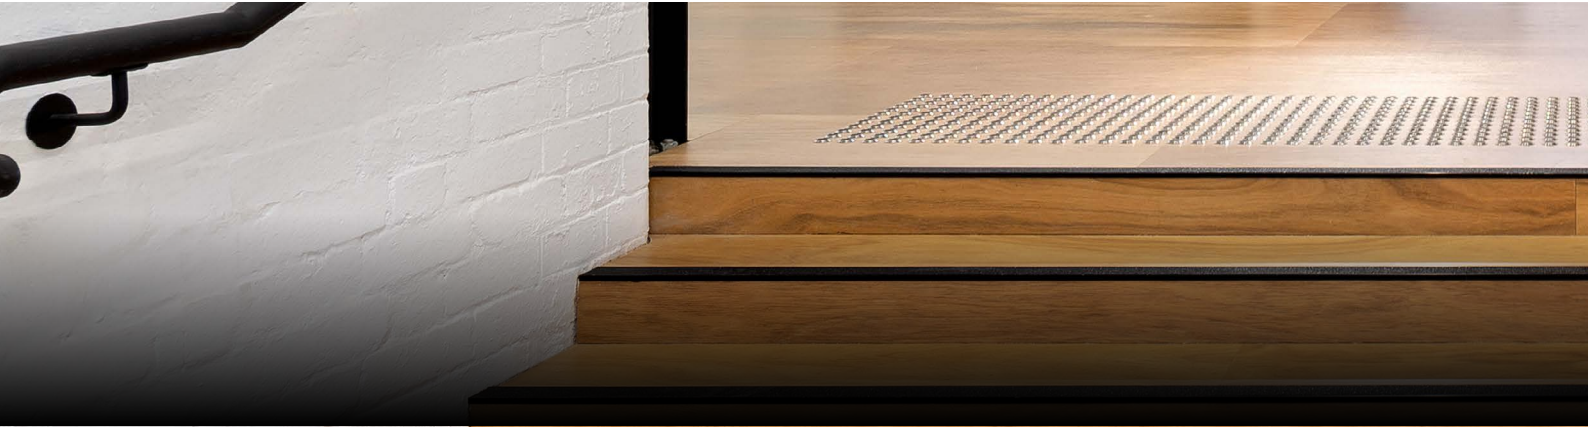

#### **DTAC PTY LTD**

ABN 41 093 070 127  
ACN 093 070 127



#### **DTAC PROJECT MANAGEMENT PTY LTD**

ABN 88 099 729 003  
ACN 009 972 9003



#### **CONTACT DETAILS**

T: 1300 793 478  
E: [sales@dtac.com.au](mailto:sales@dtac.com.au)  
[www.dtac.com.au](http://www.dtac.com.au)



#### **POSTAL ADDRESS**


PO BOX 5059  
South Melbourne  
VIC Australia 3205



#### **OFFICE ADDRESS**

4/11-12 Phillip Court  
Port Melbourne VIC  
Australia 3207



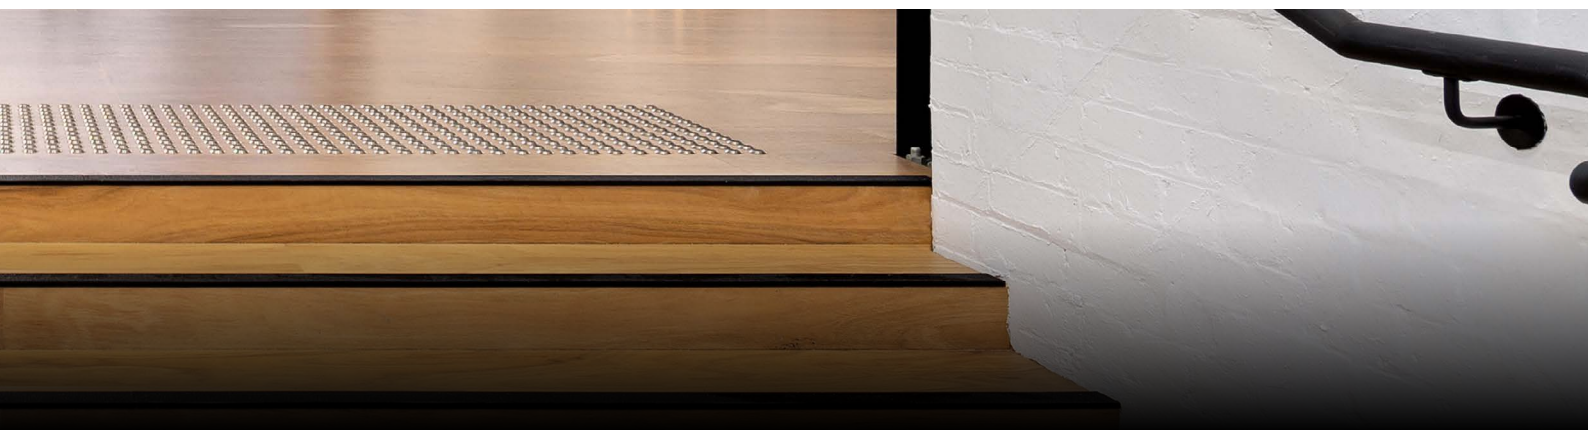

|                           |           |  |           |                                    |           |
|---------------------------|-----------|--|-----------|------------------------------------|-----------|
| <b>ABOUT DTAC</b>         | <b>2</b>  | <b>INTEGRATED TGSi'S</b>                                       | <b>30</b> | <b>URBAN EDGE PROTECTORS</b>       | <b>62</b> |
| <b>SERVICES</b>           | <b>4</b>  | Stainless Classic  | 32        | Button Round                       | 64        |
| <b>WARNING TGSi'S</b>     | <b>6</b>  | Black Top Classic  | 34        | Button Bevelled                    | 65        |
| Stainless Classic         | 8         | Ultimat® Tactile   | 36        | Bar Thin                           | 66        |
| Stainless Terraced        | 12        | <b>STAIR TREADS, THRESHOLD TRANSITIONS &amp; EDGING STRIPS</b> | <b>38</b> | Bar Thick                          | 67        |
| Black Top Classic         | 14        | Corduroy   | 40        | <b>HANDRAIL TACTILE INDICATORS</b> | <b>68</b> |
| Black Top Terraced        | 15        | Pinstripe  | 41        | Stainless Steel                    | 70        |
| Yellow Top Classic        | 16        | Pleat  | 42        | <b>INDEX</b>                       | <b>72</b> |
| Silicon Carbide Classic   | 17        | Stitch   | 43        |                                    |           |
| Brass Classic             | 18        | Suede  | 44        |                                    |           |
| Brass Terraced            | 20        | Urban  | 46        |                                    |           |
| Colourmax® Classic        | 21        | Urban  | 48        |                                    |           |
| Urethane Classic          | 22        | Rugged™  | 51        |                                    |           |
| <b>DIRECTIONAL TGSi'S</b> | <b>24</b> | Pemko® Threshold Plates  | 52        |                                    |           |
| Stainless Steel           | 26        | <b>STAIR EDGING SYSTEMS FOR CARPET</b>                         | <b>58</b> |                                    |           |
| Silicone Carbide Classic  | 26        |  |           |                                    |           |
| Urethane Classic          | 28        |  |           |                                    |           |



## ABOUT DTAC

An Australian company with over 15 years in design and product innovation excellence, DTAC is a specialised team of professionals that focus on producing superior quality products to meet the challenges of Australia's Tactile, Stair Tread and Edging compliance.

DTAC provides a complete service nationwide, facilitated through our trained experts and DTAC's certified tactile and edging installers. We design, manufacture and install a leading range of tactile ground surface indicators (TGSI's), stair treads and edging solutions along with anti-skate products for edge protection and handrail tactile indicators (HRTI's).

We also provide a range of services to complement our product offering including design and layout consultation, access consultancy and risk management assessments or programs.

Our industry leading attention to detail ensures that architects, builders, designers and specifiers make the right selection, for aesthetics and product quality while maintaining regulatory compliance.

Disclaimer: All technical data and recommendations although based upon our research and believed to be reliable are given in good faith but without warranty. It is understood that users will independently determine the suitability of the DTAC's website content shown herein for their purposes.



## THE DTAC DIFFERENCE

When using DTAC products and services, you can be assured that:

- Products and solutions are designed to meet or even exceed certification and Australian and New Zealand Standards requirements
- Consultative support including layout and compliance services are provided throughout the life of the project including NCC interpretation
- DTAC manage the entire project from design and manufacturing to installation using our team of accredited professionals
- DTAC strive for excellence in design and craftsmanship but also back our products by warranty
- DTAC is part of the Raven Group of companies ensuring the highest quality products and services

## HOW CAN DTAC HELP?

DTAC are a vertically integrated business that designs, installs and maintains their products to the exacting codes and standards of the applicable regulatory body. We have a team of trained personnel all of whom are experienced in the requirements of the relevant standards and codes.

### WE CAN HELP:

- Interpret and apply the relevant standards and codes applicable to your project
- Design a solution to your project requirements
- Manufacture and install products on site

## CONTACT US

If you have any questions in relation to the DTAC range, DTAC is ready and able to assist you in getting it right.

Email a DTAC representative at [solutions@dtac.com.au](mailto:solutions@dtac.com.au) or for a friendly voice you can call 1300 793 478.





# SERVICES

DTAC provides complete services nationwide, facilitated through our trained experts and DTAC's certified tactile and edging installers.

Our industry leading attention to detail ensures that architects, builders, designers and specifiers make the right selection, for aesthetics and product quality while maintaining regulatory compliance.

## **SUPPLY & INSTALLATION**

DTAC design and craft their own products and services in Australia. With a comprehensive range of tactiles and stair treads available you can be certain that DTAC have the right product and the right advice for your application.

Our range is designed to conform to the NCC and Disability Discrimination Act (DDA) requirements with extensive testing and certification available.

DTAC can supply product only as well as supply and install our own products, keeping records for each DTAC Project Management installation. DTAC installers are trained under the DTAC 18 Step Accreditation process known as 'The Art of Tactile Certification™'



## PRODUCT SELECTION & COMPLIANCE CONSULTATION

DTAC have a team of trained professionals who are experienced in the field of TGSI's and stair treads explicitly in the normative aspects of AS/NZS 1428.4.1. When you choose DTAC products, our experts are available to assist with product selection, specification as well as designing compliant layouts and installations.

By specifying DTAC products and utilising our layout and installation expertise, you can avoid costly project delays and ensure the highest level of compliance.

## DTAC ACCESS CONSULTING

DTAC Access Consultants aim to provide architects and builders with practical and objective advice on the provision of access to premises (buildings) for people with disabilities. Specifically in the interpretation of AS/NZS 1428.4.1 and how this is applied to tactiles and stair tread installations.

## RISK MANAGEMENT & MAINTENANCE

With the ever changing legislative environment and the legal requirement to maintain tactile and stair tread installations, DTAC can provide once off risk assessment services as well as ongoing maintenance programs.

# WARNING TGSI's


Warning TGSI's are a series of raised dots that are installed on pedestrian surfaces. They assist in the orientation of the vision impaired and give tactile warning so they may safely navigate the built environment.

Felt under foot, detected by cane, or even read as a light contrast between a surface and a hazard, TGSI's give information to the vision impaired on where they are, where they are going and where they have been.

With an extensive range of designs and colours, DTAC work closely with architects, specifiers and builders to exceed design and aesthetic expectations on every project.

- Available in a range of colours and designs to suit all applications
- Solutions for all stable surfaces and substrates
- Designed to comply with building codes and regulations
- Tested for compliance with luminance and slip resistance requirements
- Backed by 2 year warranty

DTAC's Warning TGSI's are identifiable by the unique registered "double lip" design, providing a distinct advantage when it comes to high slip resistance.

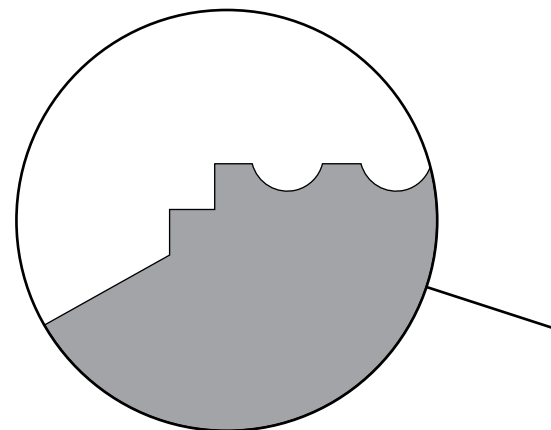

DTAC®





## STAINLESS CLASSIC

DTAC Classic Warning Tactiles combine a high quality finish with high slip resistance properties. Manufactured in 316 marine grade stainless steel, featuring a concentric circle design on the horizontal face with a smooth outer edge.

Registered Design



### STAINLESS STEEL CLASSIC WARNING TACTILE (SPIKED)

**PRODUCT CODE:** DT0100

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Drill and pressure fit or diamond core and pressure fit

#### LOCATION

Indoor or outdoor


#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

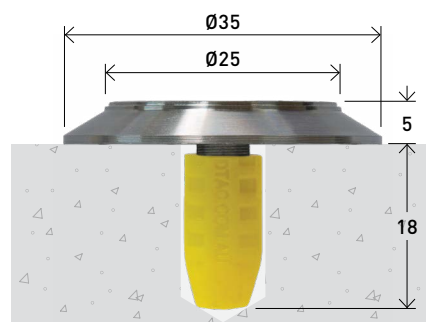

### STAINLESS STEEL CLASSIC WARNING TACTILE (FLAT)

**PRODUCT CODE:** DT0101

#### SUITABLE FOR SUBSTRATES

Vitrified porcelain, ceramics, glass, metals

#### FIXING

Direct stick

#### LOCATION

Indoor or outdoor


#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

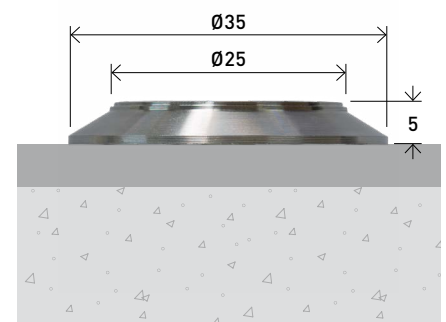



## STAINLESS STEEL CLASSIC TACTILE CARPET SYSTEM (LOW PILE)

**PRODUCT CODE:** DT0103

### SUITABLE FOR SUBSTRATES

Carpet, carpet tiles

Note: Carpet plates supplied with carpet tactiles.

### FIXING

Drill and screw

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3



## STAINLESS STEEL CLASSIC TACTILE CARPET SYSTEM (HIGH PILE)

**PRODUCT CODE:** DT0106

### SUITABLE FOR SUBSTRATES

Carpet, carpet tiles

Note: Carpet plates supplied with carpet tactiles.

### FIXING

Drill and screw

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3



## CARPET PLATE (100X300MM)


**PRODUCT CODE:** DCS0010

### FIXING

Drill and screw

### LOCATION

Indoor or outdoor

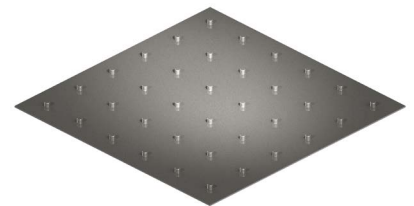

## CARPET PLATE (300X300MM)



**PRODUCT CODE:** DCS0020

### FIXING

Drill and screw

### LOCATION

Indoor or outdoor

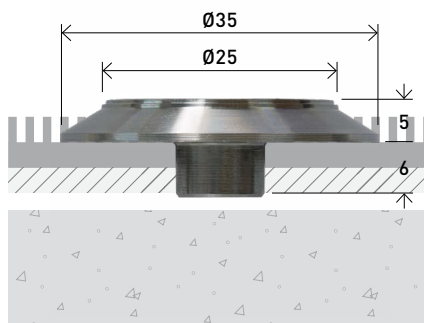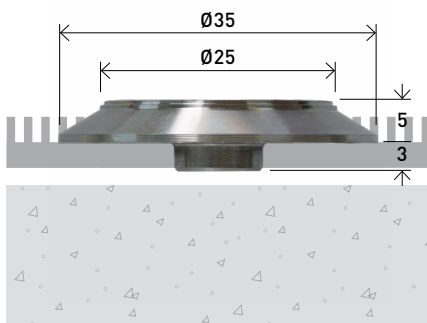



## STAINLESS STEEL CLASSIC ECOTAC<sup>®</sup> (SPIKED)

**PRODUCT CODE:** DT0120

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and pressure fit or diamond core and pressure fit

### LOCATION

Indoor or outdoor


### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

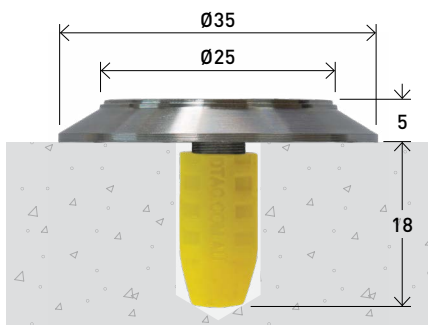

## STAINLESS STEEL CLASSIC ECOTAC<sup>®</sup> (HIGH PILE)

**PRODUCT CODE:** DT0125

### SUITABLE FOR SUBSTRATES

Carpet, carpet tiles, rubber

### FIXING

Drill and pressure fit

### LOCATION

Indoor or outdoor


### APPROVALS


#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

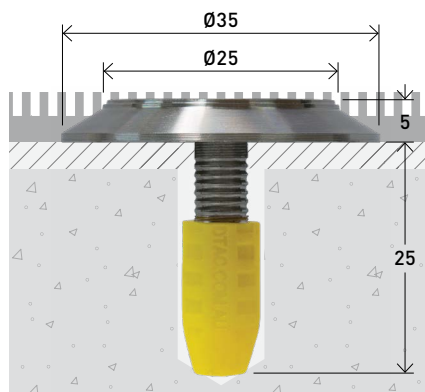

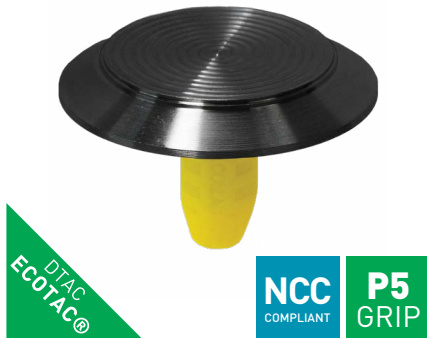

## STAINLESS STEEL CLASSIC ECOTAC<sup>®</sup> PVD BLACK (SPIKED)

**PRODUCT CODE:** DT0122

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and pressure fit or diamond core and pressure fit

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

#### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3



## STAINLESS STEEL CLASSIC PVD BLACK (FLAT)

**PRODUCT CODE:** DT0123

### SUITABLE FOR SUBSTRATES

Vitrified porcelain, ceramics, glass, metals

### FIXING

Direct stick

### LOCATION

Indoor or outdoor



### APPROVALS

#### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

#### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3

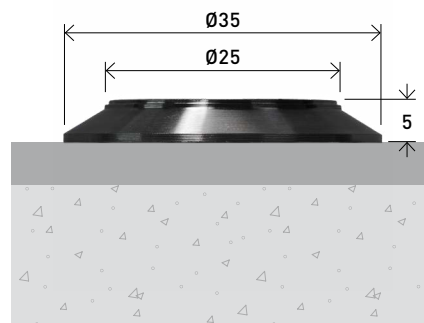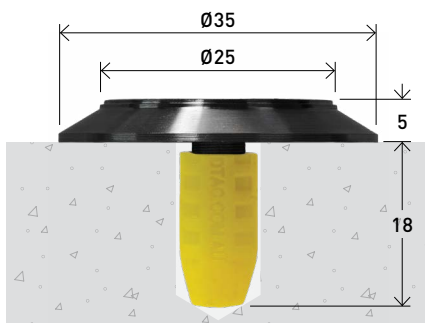



## STAINLESS TERRACED

DTAC Terraced Warning Tactiles combine a high quality finish with high slip resistance properties. Manufactured in 316 marine grade stainless steel, featuring a concentric circle design on the horizontal face and a terraced outer edge.

Registered Design.



### STAINLESS STEEL TERRACED WARNING TACTILE (SPIKED)

**PRODUCT CODE:** DT0110

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Drill and pressure fit or diamond core and pressure fit

#### LOCATION

Indoor or outdoor


#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

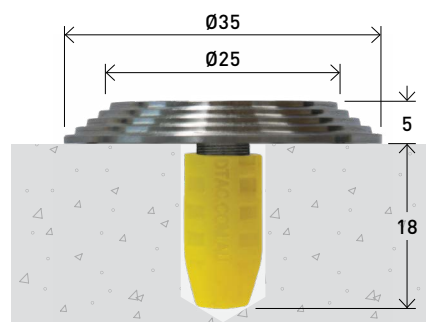

### STAINLESS STEEL TERRACED WARNING TACTILE (FLAT)

**PRODUCT CODE:** DT0111

#### SUITABLE FOR SUBSTRATES

Vitrified porcelain, ceramics, glass, metals

#### FIXING

Direct stick

#### LOCATION

Indoor or outdoor


#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

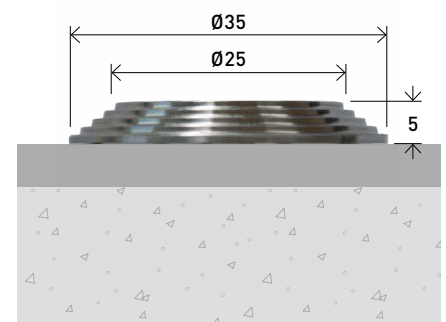



## STAINLESS STEEL TERRACED TACTILE CARPET SYSTEM (LOW PILE)

**PRODUCT CODE:** DT0113

### SUITABLE FOR SUBSTRATES

Carpet, carpet tiles

Note: Carpet plates supplied with carpet tactiles. Refer page 9.

### FIXING

Drill and screw

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3



## STAINLESS STEEL TERRACED TACTILE CARPET SYSTEM (HIGH PILE)

**PRODUCT CODE:** DT0116

### SUITABLE FOR SUBSTRATES

Carpet, carpet tiles

Note: Carpet plates supplied with carpet tactiles. Refer page 9.

### FIXING

Drill and screw

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3



## STAINLESS STEEL TERRACED ECOTAC<sup>®</sup> (SPIKED)

**PRODUCT CODE:** DT0130

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and pressure fit or diamond core and pressure fit

### LOCATION

Indoor or outdoor




### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

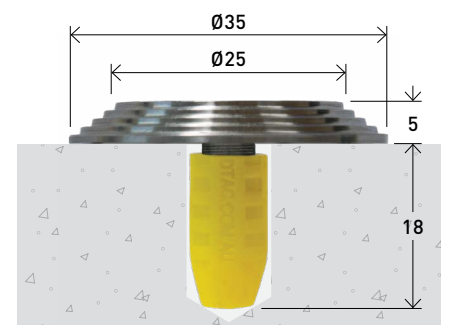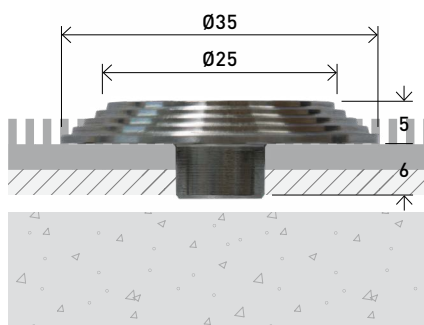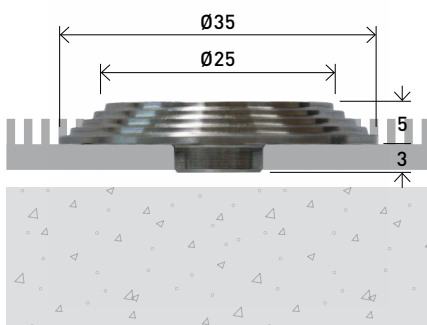



## BLACK TOP CLASSIC

DTAC Classic Black Top Tactiles combine a high quality finish with high slip resistance properties. Manufactured in 316 marine grade stainless steel incorporating a moulded polymer insert, it features a concentric circle design on the horizontal face and a smooth outer edge. Registered Design.



NCC  
COMPLIANT

R12  
GRIP

### BLACK TOP CLASSIC WARNING TACTILE (SPIKED)

**PRODUCT CODE:** DT0200

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Drill and pressure fit or diamond core and pressure fit

#### LOCATION

Indoor or outdoor

#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3



NCC  
COMPLIANT

R12  
GRIP

### BLACK TOP CLASSIC WARNING TACTILE (FLAT)

**PRODUCT CODE:** DT0201

#### SUITABLE FOR SUBSTRATES

Vitrified porcelain, ceramics, glass, metals

#### FIXING

Direct stick

#### LOCATION

Indoor or outdoor


#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

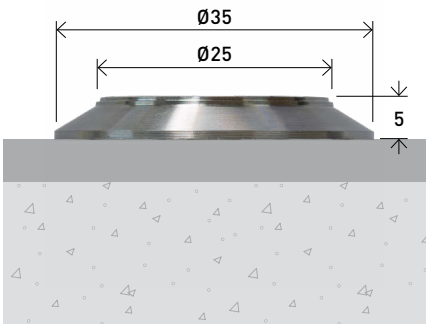



## BLACK TOP TERRACED

DTAC Terraced Black Top Tactiles combine a high quality finish with high slip resistance properties. Manufactured in 316 marine grade stainless steel incorporating a moulded polymer insert, it features a concentric circle design on the horizontal face and a terraced outer edge.

Registered Design.



## BLACK TOP TERRACED WARNING TACTILE (SPIKED)

**PRODUCT CODE:** DT0210

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and pressure fit or diamond core and pressure fit

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3



## BLACK TOP TERRACED WARNING TACTILE (FLAT)

**PRODUCT CODE:** DT0211

### SUITABLE FOR SUBSTRATES

Vitrified porcelain, ceramics, glass, metals

### FIXING

Direct stick

### LOCATION

Indoor or outdoor



### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

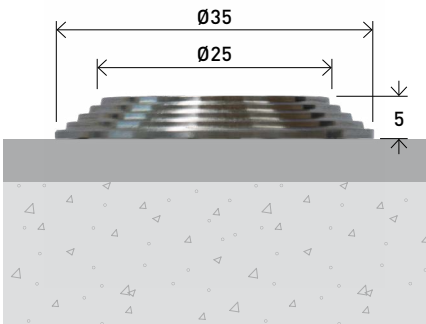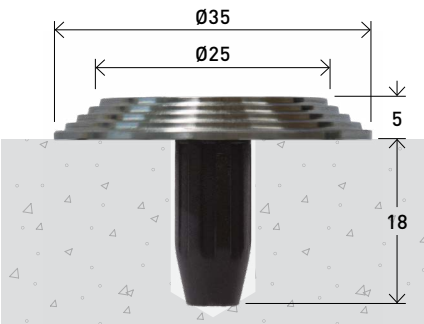



## YELLOW TOP CLASSIC

DTAC Classic Yellow Top Tactiles combine a high quality finish with high slip resistance properties. Manufactured in 316 marine grade stainless steel incorporating a moulded polymer insert, it features a concentric circle design on the horizontal face and a smooth outer edge. Registered Design.



### YELLOW TOP CLASSIC WARNING TACTILE (SPIKED)

**PRODUCT CODE:** DT0200Y

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Drill and pressure fit or diamond core and pressure fit

#### LOCATION

Indoor or outdoor


#### APPROVALS

##### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

##### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3

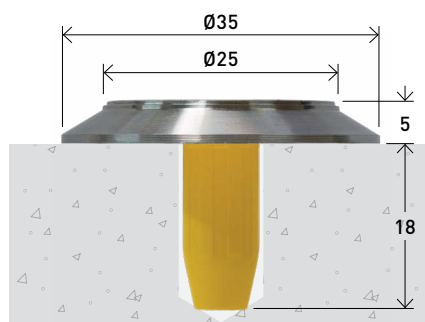



## SILICON CARBIDE CLASSIC

DTAC Classic Silicon Carbide Warning Tactiles combine a high quality finish with high slip resistance properties. Manufactured in 316 marine grade stainless steel with hard wearing silicon carbide inserted into the horizontal face with a smooth machined outer edge.

Registered Design.



### SILICON CARBIDE CLASSIC WARNING TACTILE (SPIKED)

**PRODUCT CODE:** DT0212

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Drill and pressure fit or diamond core and pressure fit

#### LOCATION

Indoor or outdoor

#### APPROVALS

##### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

##### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3



### SILICON CARBIDE CLASSIC WARNING TACTILE (FLAT)

**PRODUCT CODE:** DT0213

#### SUITABLE FOR SUBSTRATES

Vitrified porcelain, ceramics, glass, metals

#### FIXING

Direct stick

#### LOCATION

Indoor or outdoor



#### APPROVALS

##### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

##### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3

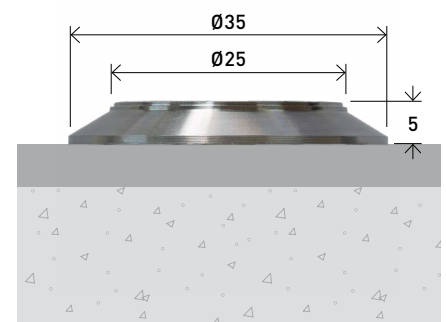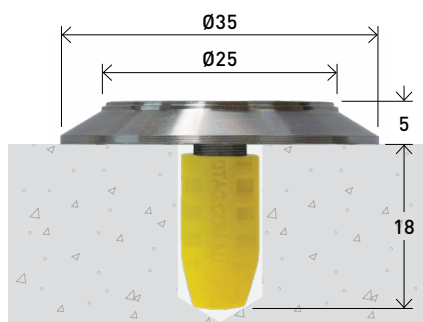



## BRASS CLASSIC

DTAC Classic Brass Warning Tactiles combine a high quality finish with high slip resistance properties. Manufactured from solid brass it features a concentric circle design on the horizontal face with a smooth outer edge.

Registered Design.



NCC  
COMPLIANT

R12  
GRIP

### BRASS CLASSIC WARNING TACTILE (SPIKED)

**PRODUCT CODE:** DT0300

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Drill and pressure fit or diamond core and pressure fit

#### LOCATION

Indoor or outdoor

#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3



NCC  
COMPLIANT

R12  
GRIP

### BRASS CLASSIC WARNING TACTILE (FLAT)

**PRODUCT CODE:** DT0301

#### SUITABLE FOR SUBSTRATES

Vitrified porcelain, ceramics, glass, metals

#### FIXING

Direct stick

#### LOCATION

Indoor or outdoor



#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

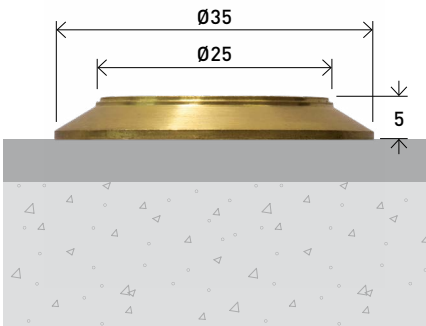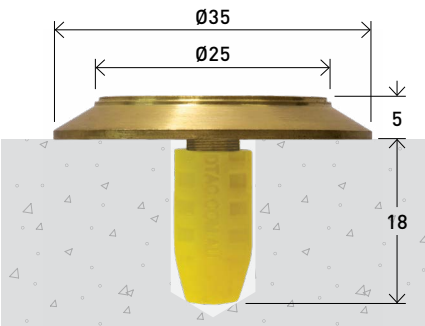



## BRASS CLASSIC TACTILE CARPET SYSTEM (HIGH PILE)

**PRODUCT CODE:** DT0306

### SUITABLE FOR SUBSTRATES

Carpet, carpet tiles

Note: Carpet plates supplied with carpet tactiles. Refer page 9.

### FIXING

Drill and screw

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3



## BRASS CLASSIC ECOTAC<sup>®</sup> (SPIKED)

**PRODUCT CODE:** DT0312

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and pressure fit or diamond core and pressure fit

### LOCATION

Indoor or outdoor



### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

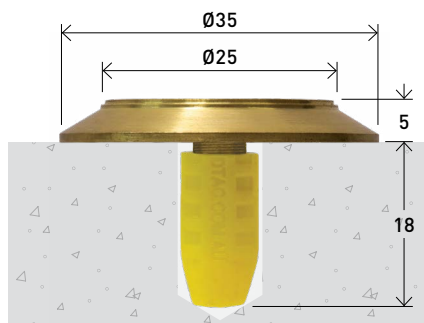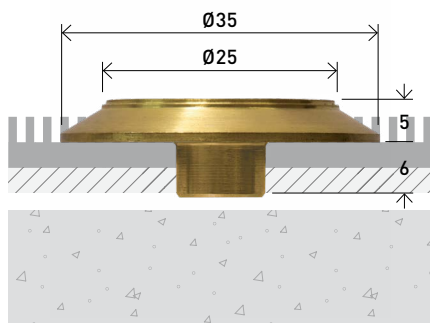

DTAC DT0300 INSTALLATION



## BRASS TERRACED

DTAC Terraced Brass Warning Tactiles combine a high quality finish with high slip resistance properties. Manufactured from solid brass, featuring a concentric circle design on the horizontal face and a terraced outer edge.

Registered Design.



NCC  
COMPLIANT

P5  
GRIP

### BRASS TERRACED WARNING TACTILE (SPIKED)

**PRODUCT CODE:** DT0310

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Drill and pressure fit or diamond core and pressure fit

#### LOCATION

Indoor or outdoor

#### APPROVALS

##### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

##### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3



NCC  
COMPLIANT

P5  
GRIP

### BRASS TERRACED WARNING TACTILE (FLAT)

**PRODUCT CODE:** DT0311

#### SUITABLE FOR SUBSTRATES

Vitrified porcelain, ceramics, glass, metals

#### FIXING

Direct stick

#### LOCATION

Indoor or outdoor



#### APPROVALS

##### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

##### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3

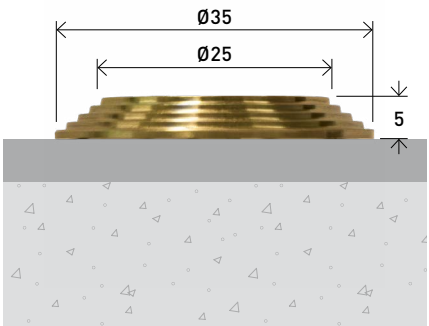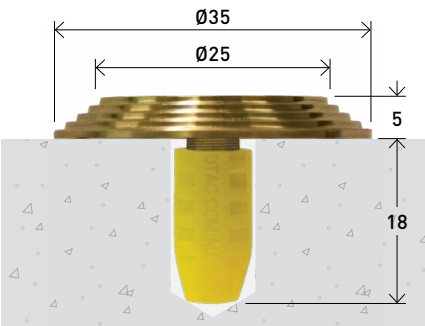



## COLOURMAX® CLASSIC

DTAC Classic Colourmax® tactiles combine the flexibility of colour with durable polymers while ensuring high slip resistance properties. Manufactured in solid 316 marine grade stainless steel with a hardwearing outer polymer ring, it has a concentric circle design on the horizontal face and a smooth outer edge.

Registered Design.



### COLOURMAX® CLASSIC WARNING TACTILE (BLACK)

**PRODUCT CODE:** DT0400B

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Drill and pressure fit or diamond core and pressure fit

#### LOCATION

Indoor or outdoor

#### APPROVALS

##### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

##### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3



### COLOURMAX® CLASSIC WARNING TACTILE (YELLOW)

**PRODUCT CODE:** DT0400Y

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Drill and pressure fit or diamond core and pressure fit

#### LOCATION

Indoor or outdoor



#### APPROVALS

##### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

##### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3

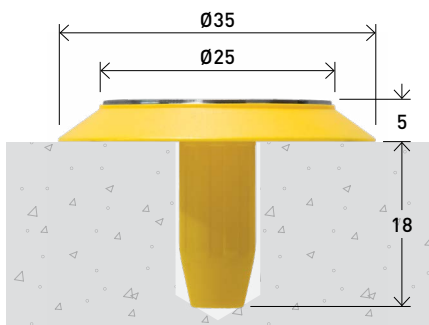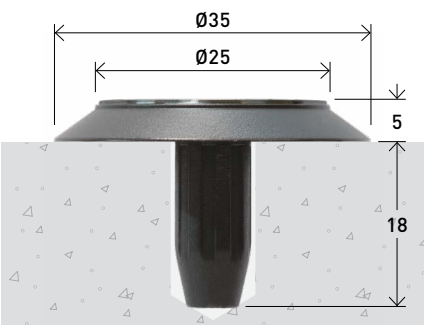



## URETHANE CLASSIC

DTAC Classic Urethane Warning tactiles combine a high quality finish and the flexibility of colour choice with durable high grade urethanes ensuring high slip resistance properties. Moulded in high impact UV stabilised urethane, featuring a concentric circle design on the horizontal face and a smooth outer edge.

Registered Design.



### URETHANE CLASSIC WARNING TACTILE (BLACK)

**PRODUCT CODE:** DT0600B

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Drill and pressure fit or diamond core and pressure fit

#### LOCATION

Indoor or outdoor

#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

##### FIRE TESTING

- ✓ AS/ISO 9239.1



### URETHANE CLASSIC WARNING TACTILE (LIGHT GREY)

**PRODUCT CODE:** DT0600LG

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Drill and pressure fit or diamond core and pressure fit

#### LOCATION

Indoor or outdoor

#### APPROVALS

##### SLIP RESISTANCE TESTING



- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

##### FIRE TESTING

- ✓ AS/ISO 9239.1

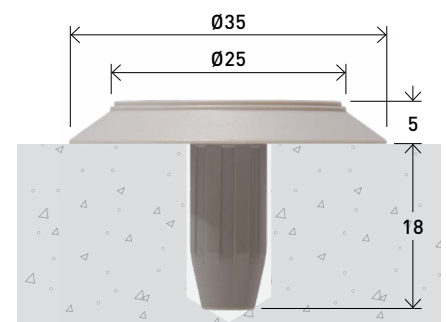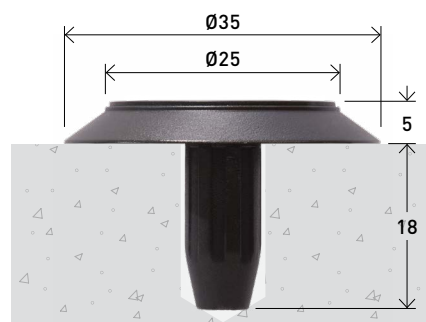



## URETHANE CLASSIC WARNING TACTILE (YELLOW)

**PRODUCT CODE:** DT0600Y

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and pressure fit or diamond core and pressure fit

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

#### FIRE TESTING

- ✓ AS/ISO 9239.1

## URETHANE CLASSIC WARNING TACTILE (WHITE)

**PRODUCT CODE:** DT0600W

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and pressure fit or diamond core and pressure fit

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

## URETHANE CLASSIC WARNING TACTILE (BLUE)

**PRODUCT CODE:** DT0600BL

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and pressure fit or diamond core and pressure fit

### LOCATION

Indoor or outdoor




### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

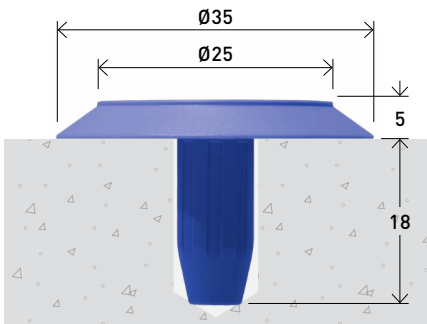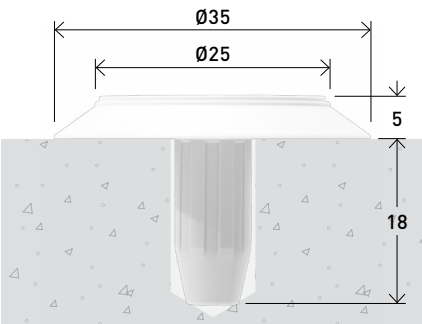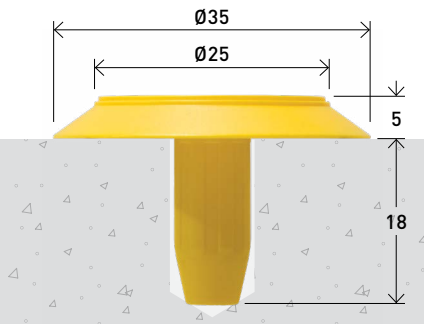

# DIRECTIONAL TGSI's

Directional TGSI's are a series of raised bars that are installed on pedestrian surfaces. They assist in the orientation of the vision impaired and give tactile warning so they may safely navigate the built environment.

Felt under foot, detected by cane, or even read as a light contrast between a surface and a hazard, TGSI's give information to the vision impaired on where they are, where they are going and where they have been.

With an extensive range of designs and colours, DTAC work closely with architects, specifiers and builders to exceed design and aesthetic expectations on every project.

- Available in a range of colours and designs to suit all applications
- Solutions for all stable surfaces and substrates
- Designed to comply with building codes and regulations
- Tested for compliance with luminance and slip resistance requirements
- Backed by 2 year warranty

DTAC®



DTAC DIR0120 INSTALLATION

## STAINLESS STEEL

DTAC Directional tactiles combine a high quality finish with high slip resistance properties. Manufactured in 316 marine grade stainless steel with a grooved design on the horizontal face.

As part of DTAC's commitment to the environment, our Ecotac<sup>®</sup> range of tactiles use significantly less material whilst maintaining the highest performance.

The silicon carbide directional tactiles feature hard wearing silicon carbide inserted into the horizontal face for maximum slip resistance.



DTAC DIR0130 INSTALLATION



**NCC**  
COMPLIANT

**R13**  
GRIP

## CLASSIC ECOTAC® DIRECTIONAL TACTILE (STAINLESS STEEL)

**PRODUCT CODE:** DIR0120

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and pressure fit or diamond core and pressure fit

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3



**NCC**  
COMPLIANT

**R13**  
GRIP

## TERRACED ECOTAC® DIRECTIONAL TACTILE (STAINLESS STEEL)

**PRODUCT CODE:** DIR0130

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and pressure fit or diamond core and pressure fit

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3



**NCC**  
COMPLIANT

**R13**  
GRIP

## SILICON CARBIDE CLASSIC DIRECTIONAL TACTILE (STAINLESS STEEL)

**PRODUCT CODE:** DIR0140

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and pressure fit or diamond core and pressure fit

### LOCATION

Indoor or outdoor


### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

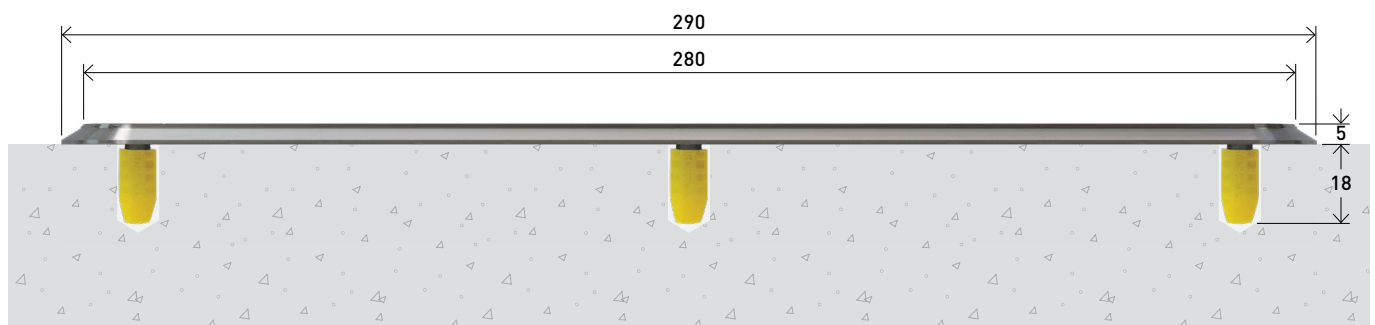

## URETHANE CLASSIC

DTAC Classic Urethane Directional tactiles combine a high quality finish and the flexibility of colour choice with durable high grade urethanes ensuring high slip resistance properties. Moulded in high impact UV stabilised urethane, featuring an undulating groove design on the horizontal face with a smooth outer edge.

Registered Design.  
Patent Pending.



DTAC DIR0120 INSTALLATION



### URETHANE CLASSIC DIRECTIONAL TACTILE (BLACK)

**PRODUCT CODE:** DIRP0705B

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Drill and pressure fit or diamond core and pressure fit

#### LOCATION

Indoor or outdoor


#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

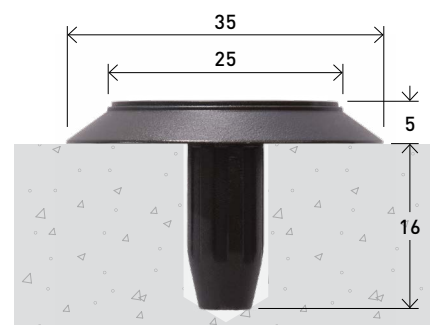



## URETHANE CLASSIC DIRECTIONAL TACTILE (LIGHT GREY)

**PRODUCT CODE:** DIRP0705LG

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and pressure fit or diamond core and pressure fit

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3



## URETHANE CLASSIC DIRECTIONAL TACTILE (YELLOW)

**PRODUCT CODE:** DIRP0705Y

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and pressure fit or diamond core and pressure fit

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3



## URETHANE CLASSIC DIRECTIONAL TACTILE (WHITE)

**PRODUCT CODE:** DIRP0705W

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and pressure fit or diamond core and pressure fit

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3



# INTEGRATED TGSIs

Integrated TGSIs are a series of raised dots affixed to a backing plate that is installed on pedestrian surfaces as a complete unit. They assist in the orientation of the vision impaired and give tactile warning so they may safely navigate the built environment.

Felt under foot, detected by cane, or even read as a light contrast between a surface and a hazard, TGSIs give information to the vision impaired on where they are, where they are going and where they have been.


With an extensive range of designs and colours, DTAC work closely with architects, specifiers and builders to exceed design and aesthetic expectations on every project.

- Available in a range of colours and designs to suit all applications
- Solutions for all stable surfaces and substrates
- Designed to comply with building codes and regulations
- Tested for compliance with luminance and slip resistance requirements
- Backed by 2 year warranty

DTAC®




DTAC DIT0040 INSTALLATION

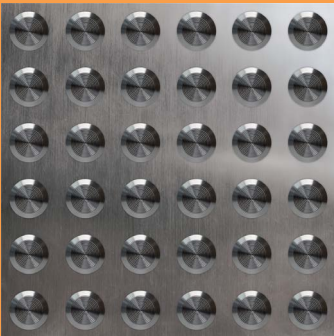

# STAINLESS CLASSIC

DTAC Classic Integrated tactiles combine a high quality finish with high slip resistance properties. Manufactured in 316 marine grade stainless steel with a concentric circle design on the horizontal face and smooth outer edge, tactiles are affixed to a solid plate as a single complete unit.



NCC  
COMPLIANT

P5  
GRIP

## STAINLESS STEEL CLASSIC INTEGRATED TACTILE (300X300)

PRODUCT CODE: DIT0010

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals, carpet, carpet tiles

### FIXING

Drill and screw or direct stick

### LOCATION

Indoor or outdoor


### APPROVALS

#### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

#### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3

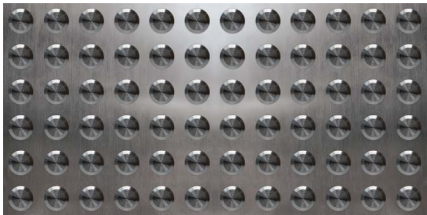

NCC  
COMPLIANT

P5  
GRIP

## STAINLESS STEEL CLASSIC INTEGRATED TACTILE (300X600)

PRODUCT CODE: DIT0020

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals, carpet, carpet tiles

### FIXING

Drill and screw or direct stick

### LOCATION

Indoor or outdoor


### APPROVALS

#### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

#### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3

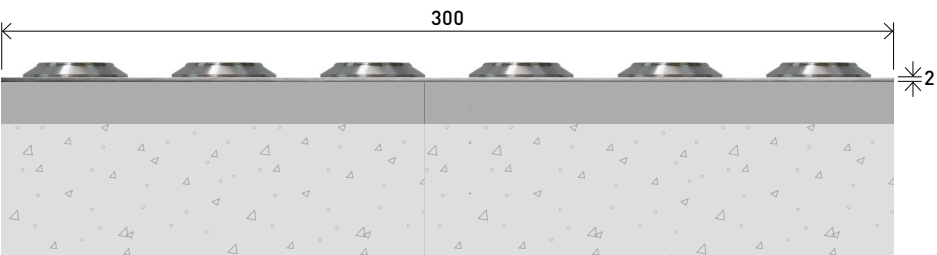



## STAINLESS STEEL CLASSIC INTEGRATED TACTILE (100X300)

**PRODUCT CODE:** DIT0070

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals, carpet, carpet tiles

### FIXING

Drill and screw or direct stick

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

#### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3

## STAINLESS STEEL CLASSIC INTEGRATED TACTILE (100X600)

**PRODUCT CODE:** DIT0080

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals, carpet, carpet tiles

### FIXING

Drill and screw or direct stick

### LOCATION

Indoor or outdoor


### APPROVALS

#### SLIP RESISTANCE TESTING


✓ AS 4586 Appendix A

#### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3

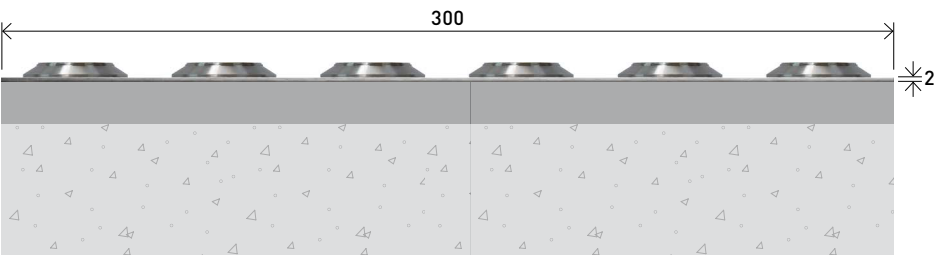


DTAC DIT0020 INSTALLATION

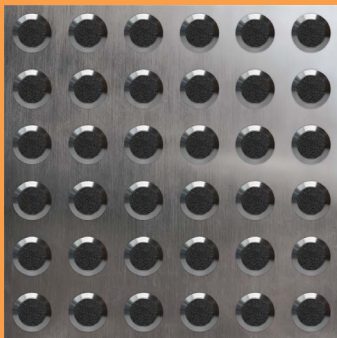

## BLACK TOP CLASSIC

DTAC Classic Black Top Integrated tactiles combine a high quality finish with high slip resistance properties. Manufactured in 316 marine grade stainless steel with hard wearing silicon carbide inserted into the horizontal face with a smooth machined outer edge, the tactiles are affixed to a solid plate as a single complete unit.



### BLACK TOP CLASSIC INTEGRATED TACTILE (300X300)

**PRODUCT CODE:** DIT0030

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals, carpet, carpet tiles

#### FIXING

Drill and screw or direct stick

#### LOCATION

Indoor or outdoor


#### APPROVALS

##### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

##### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3

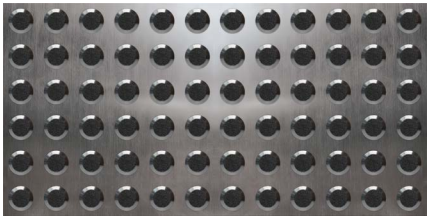

### BLACK TOP CLASSIC INTEGRATED TACTILE (300X600)

**PRODUCT CODE:** DIT0040

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals, carpet, carpet tiles

#### FIXING

Drill and screw or direct stick

#### LOCATION

Indoor or outdoor


#### APPROVALS

##### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

##### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3

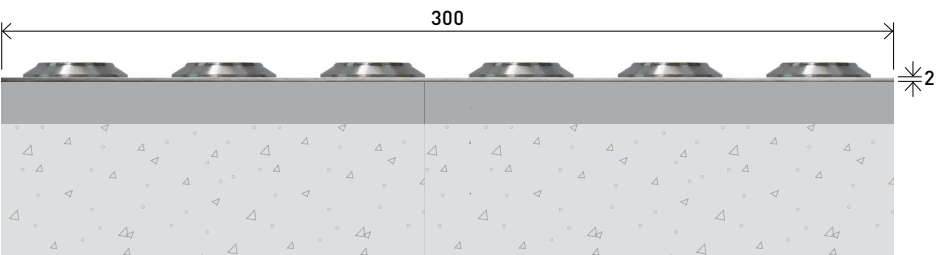



## BLACK TOP CLASSIC INTEGRATED TACTILE (100X300)

**PRODUCT CODE:** DIT0090

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals, carpet, carpet tiles

### FIXING

Drill and screw or direct stick

### LOCATION

Indoor or outdoor


### APPROVALS

#### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

#### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3



## BLACK TOP CLASSIC INTEGRATED TACTILE (100X600)

**PRODUCT CODE:** DIT0100

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals, carpet, carpet tiles

### FIXING

Drill and screw or direct stick

### LOCATION

Indoor or outdoor


### APPROVALS

#### SLIP RESISTANCE TESTING


✓ AS 4586 Appendix A

#### LUMINANCE TESTING

✓ AS/NZS 1428.4.1 Appendix E3

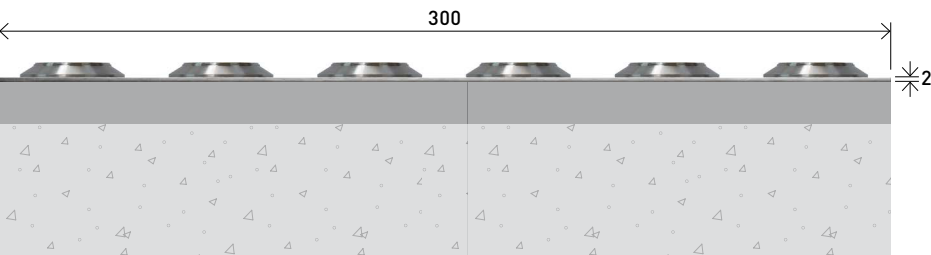


DTAC DIT0040 INSTALLATION

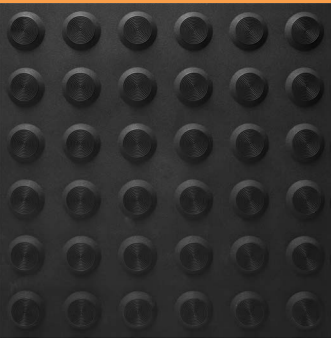

## ULTIMAT® TACTILE

DTAC Ultimat® Tactiles combine a high quality finish and the flexibility of colour choice with durable high grade urethanes ensuring high slip resistance properties. Moulded in high impact UV stabilised urethane, featuring a concentric circle design on the horizontal face with a smooth outer edge.

Used in conjunction with adhesive to provide excellent adhesion eliminating the need for a butyl backing.



### ULTIMAT® TACTILE (BLACK)

**PRODUCT CODE:** DWU0010

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Direct stick

#### LOCATION

Indoor or outdoor

#### APPROVALS

##### SLIP RESISTANCE TESTING


- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

##### FIRE TESTING

- ✓ AS/ISO 9239.1



### ULTIMAT® TACTILE (YELLOW)

**PRODUCT CODE:** DWU0011

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Direct stick

#### LOCATION

Indoor or outdoor

#### APPROVALS

##### SLIP RESISTANCE TESTING


- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D


##### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

##### FIRE TESTING

- ✓ AS/ISO 9239.1

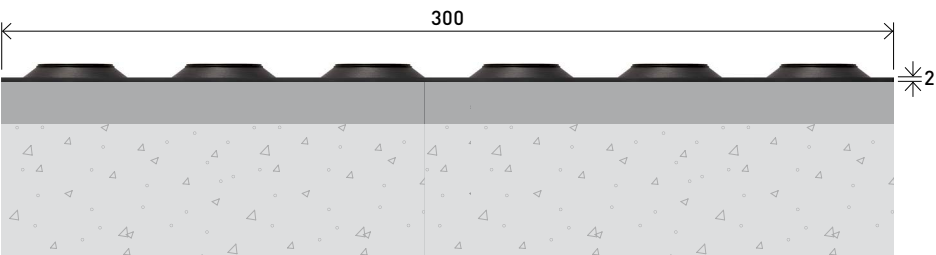



## ULTIMAT® TACTILE (LIGHT GREY)

**PRODUCT CODE:** DWU0012

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Direct stick

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING


- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

#### FIRE TESTING

- ✓ AS/ISO 9239.1



## ULTIMAT® TACTILE (IVORY)

**PRODUCT CODE:** DWU0013

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Direct stick

### LOCATION

Indoor or outdoor

### APPROVALS

#### SLIP RESISTANCE TESTING


- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

#### FIRE TESTING

- ✓ AS/ISO 9239.1



## ULTIMAT® TACTILE (WHITE)

**PRODUCT CODE:** DWU0014

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Direct stick

### LOCATION

Indoor or outdoor


### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS/NZS 1428.4.1 Appendix E3

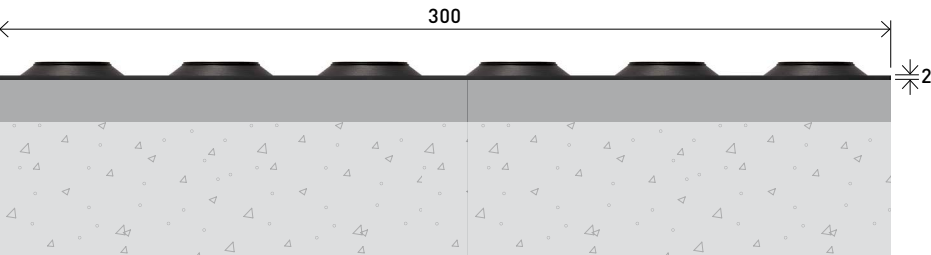

# STAIR TREADS, THRESHOLD TRANSITIONS & EDGING STRIPS

DTAC's range of PEMKO® stair treads and edging has transformed the manner in which you can detail a stair edge, nosing or connection. DTAC's retrofit edging series delivers a practical and aesthetically pleasing approach to slip prevention and edge protection.

Discreet in appearance, uncompromised in their design functionality and pure material aesthetic, DTAC edging can be adapted for all architectural and joinery situations including carpet and stable finished surfaces and substrates.

With many designs and finishes available, our range of edging and stair treads provide an NCC compliant solution with a flawless finish.


- Premium quality flat or angle aluminium profiles satin hard anodised finish
- Suitable for all stable finished surfaces and substrates
- Designed to comply with AS 1428.1
- Tested for compliance with luminance and slip resistance requirements
- Backed by 2 year warranty





## CORDUROY

DTAC PEMKO® Corduroy edging and stair treads combine a high quality finish with high slip resistant properties. Manufactured from hard anodised T5 extruded aluminium it features a continuous engraving design extending for the entire length of the section.

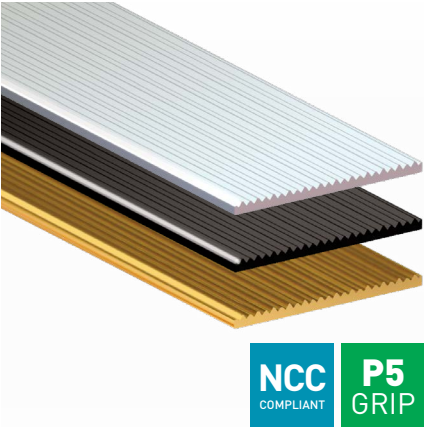

### PEMKO® CORDUROY EDGING 50X3

#### PRODUCT CODES:

|                      |         |
|----------------------|---------|
| NATURAL ANODISED     | DE0100C |
| BLACK ANODISED       | DE0100B |
| BRIGHT GOLD ANODISED | DE0100G |

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Adhesive

#### LOCATION

Indoor or outdoor

#### LENGTH

2500mm (DE0100G)  
3200mm (DE0100C & DE0100B)



#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

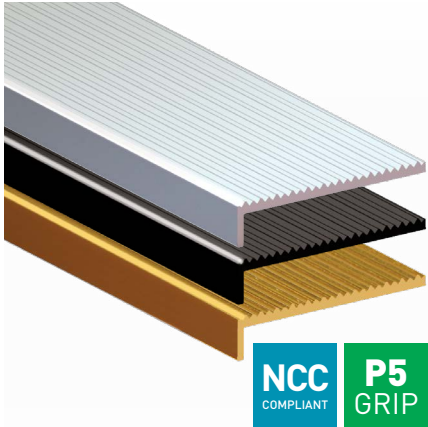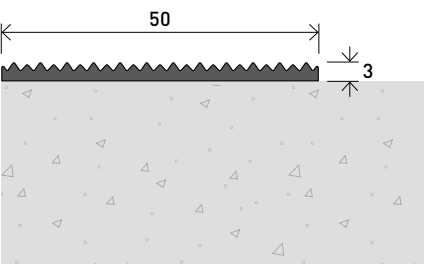

### PEMKO® CORDUROY EDGING 10X50X3

#### PRODUCT CODES:

|                      |         |
|----------------------|---------|
| NATURAL ANODISED     | DE0110C |
| BLACK ANODISED       | DE0110B |
| BRIGHT GOLD ANODISED | DE0110G |

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Adhesive

#### LOCATION

Indoor or outdoor

#### LENGTH

2500mm (DE0110G)  
3200mm (DE0110C & DE0110B)


#### APPROVALS


##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING


- ✓ AS 1428.1 Appendix B3

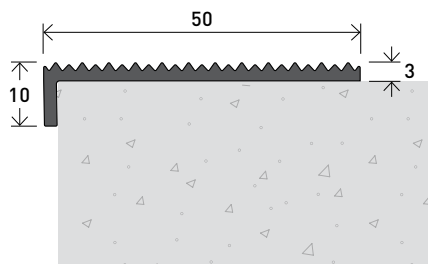

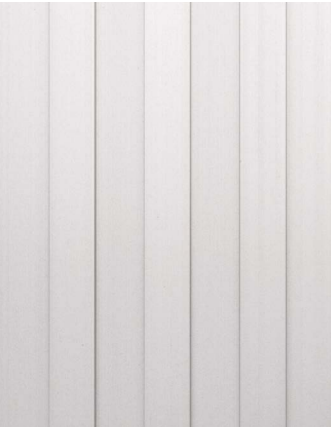

## PINSTRIPE

DTAC PEMKO<sup>®</sup> Pinstripe edging and stair treads combine a high quality finish with high slip resistant properties. Manufactured from hard anodised T5 extruded aluminium it features a continuous intermittent high and low smooth surface along the length of the section.

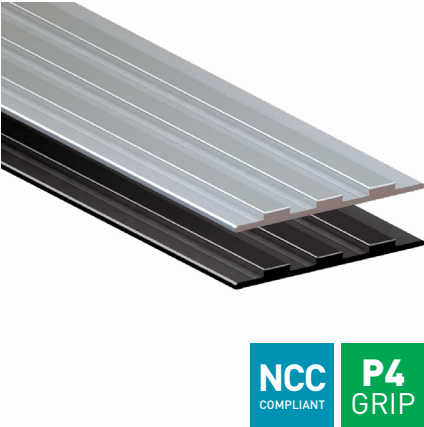

### PEMKO<sup>®</sup> PINSTRIPE EDGING 50X3

|                         |         |
|-------------------------|---------|
| <b>PRODUCT CODES:</b>   |         |
| <b>NATURAL ANODISED</b> | DE0200C |
| <b>BLACK ANODISED</b>   | DE0200B |

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Adhesive

#### LOCATION

Indoor

#### LENGTH

2500mm (DE0200C)  
3200mm (DE0200B)


#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

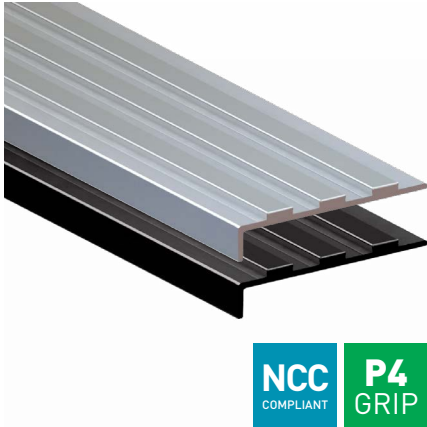

### PEMKO<sup>®</sup> PINSTRIPE EDGING 10X50X3

|                         |         |
|-------------------------|---------|
| <b>PRODUCT CODES:</b>   |         |
| <b>NATURAL ANODISED</b> | DE0210C |
| <b>BLACK ANODISED</b>   | DE0210B |

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Adhesive

#### LOCATION

Indoor

#### LENGTH

3200mm



#### APPROVALS


##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING


- ✓ AS 1428.1 Appendix B3

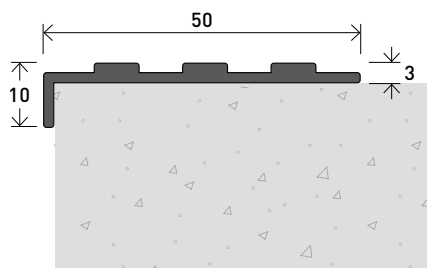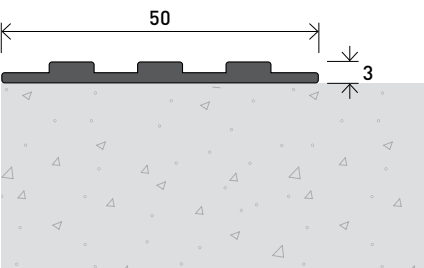

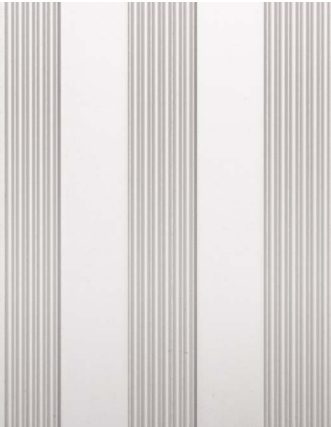

## PLEAT

DTAC PEMKO® Pleat edging and stair treads combine a high quality finish with high slip resistant properties. Manufactured from hard anodised T5 extruded aluminium it features a continuous intermittent high engraved surface and low smooth surface along the length of the section.

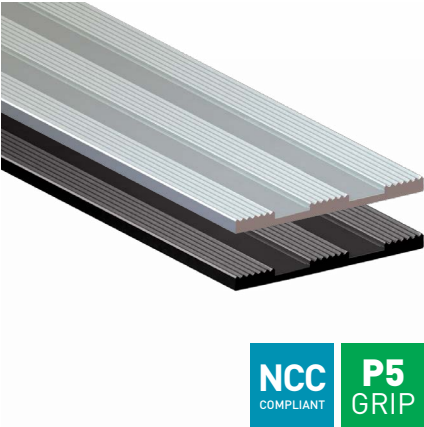

### PEMKO® PLEAT EDGING 50X3

|                         |         |
|-------------------------|---------|
| <b>PRODUCT CODES:</b>   |         |
| <b>NATURAL ANODISED</b> | DE0300C |
| <b>BLACK ANODISED</b>   | DE0300B |

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Adhesive

#### LOCATION

Indoor or outdoor

#### LENGTH

2500mm



#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

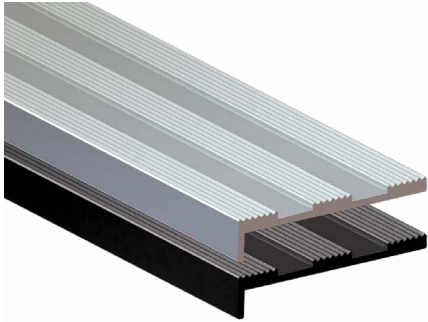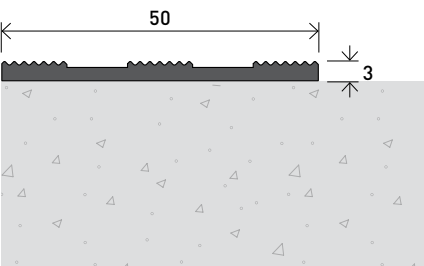

### PEMKO® PLEAT EDGING 10X50X3

|                         |         |
|-------------------------|---------|
| <b>PRODUCT CODES:</b>   |         |
| <b>NATURAL ANODISED</b> | DE0310C |
| <b>BLACK ANODISED</b>   | DE0310B |

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Adhesive

#### LOCATION

Indoor or outdoor

#### LENGTH

2500mm (DE0310C)  
3200mm (DE0310B)


#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

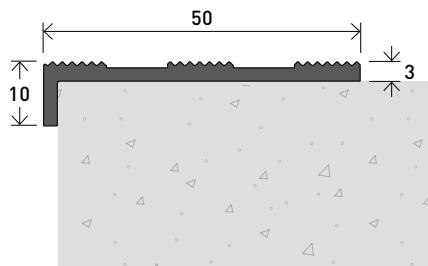



## STITCH

DTAC PEMKO® Stitch edging and stair treads combine a high quality finish with high slip resistant properties. Manufactured from T5 extruded aluminium, the Stitch design features a continuous intermittent thin high engraved surface and low wide smooth surface along the length of the section.



### PEMKO® STITCH EDGING 50X3

#### PRODUCT CODES:

|                  |         |
|------------------|---------|
| NATURAL ANODISED | DE0400C |
| BLACK ANODISED   | DE0400B |

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Adhesive

#### LOCATION

Indoor

#### LENGTH

2500mm


#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

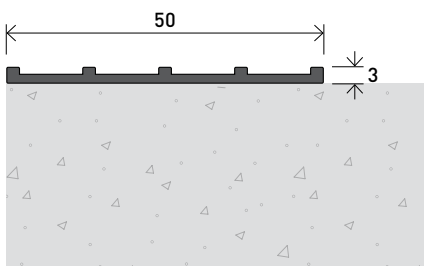

### PEMKO® STITCH EDGING 10X50X3

#### PRODUCT CODES:

|                  |         |
|------------------|---------|
| NATURAL ANODISED | DE0410C |
| BLACK ANODISED   | DE0410B |

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Adhesive

#### LOCATION

Indoor

#### LENGTH

2500mm (DE0410C)

3200mm (DE0410B)


#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING


- ✓ AS 1428.1 Appendix B3

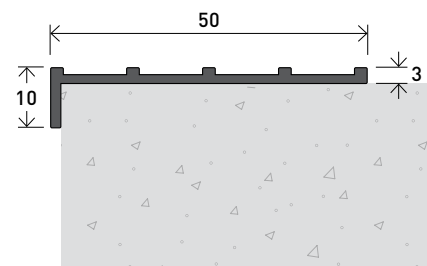



## SUEDE

DTAC PEMKO® Suede edging and stair treads combine a high quality finish with high slip resistant properties. Manufactured from T5 extruded aluminium it features a continuous band of slip resistant insert.

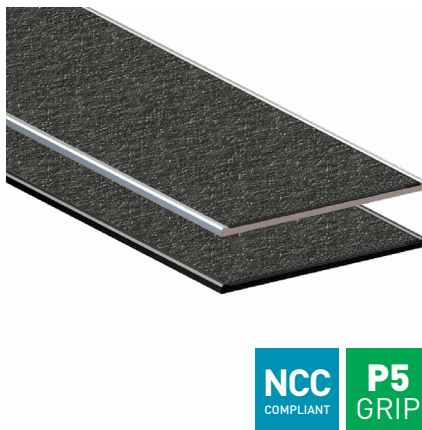

### PEMKO® SUEDE EDGING 50X3

#### PRODUCT CODES:

**NATURAL ANODISED** DE0500C

Slip resistant insert

**BLACK ANODISED** DE0500B

Slip resistant insert

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Adhesive

#### LOCATION

Indoor

#### LENGTH

3200mm


#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

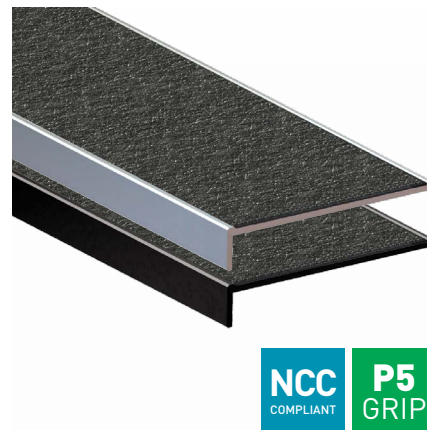

### PEMKO® SUEDE EDGING 10X50X3

#### PRODUCT CODES:

**NATURAL ANODISED** DE0510C

Slip resistant insert

**BLACK ANODISED** DE0510B

Slip resistant insert

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Adhesive

#### LOCATION

Indoor

#### LENGTH

3200mm



#### APPROVALS

##### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

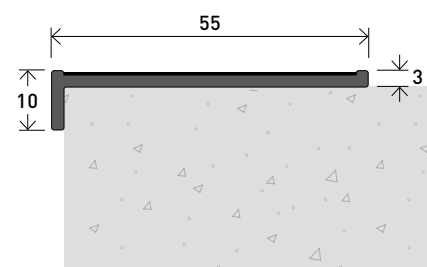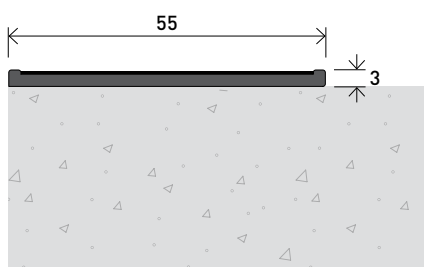



DTAC DE0500C INSTALLATION



## URBAN

DTAC PEMKO<sup>®</sup> Urban edging and stair treads combine a high quality finish with high slip resistant properties. Manufactured from T5 extruded aluminium, the Urban design features a continuous bar of silicon carbide infill.



### PEMKO<sup>®</sup> URBAN EDGING 10X58X5

#### PRODUCT CODES:

|                              |                |
|------------------------------|----------------|
| <b>NATURAL ANODISED</b>      | <b>DE0680C</b> |
| Grey silicon carbide infill  |                |
| <b>BLACK ANODISED</b>        | <b>DE0680B</b> |
| Black silicon carbide infill |                |

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Adhesive. Optional screw-fix (colour matched screws and plugs supplied)

#### LOCATION

Indoor or outdoor

#### LENGTH

2500mm (DE0680C)  
3200mm (DE0680B)

#### APPROVALS

##### SLIP RESISTANCE TESTING


- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

##### FIRE TESTING

- ✓ AS/ISO 9239.1

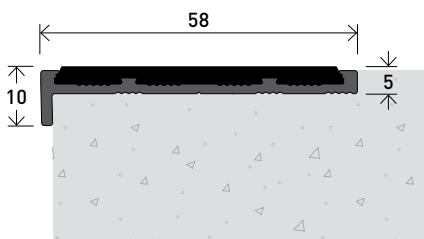

### PEMKO<sup>®</sup> URBAN EDGING 58X5

#### PRODUCT CODES:

|                              |                |
|------------------------------|----------------|
| <b>NATURAL ANODISED</b>      | <b>DE0690C</b> |
| Grey silicon carbide infill  |                |
| <b>BLACK ANODISED</b>        | <b>DE0690B</b> |
| Black silicon carbide infill |                |

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Adhesive. Optional screw-fix (colour matched screws and plugs supplied)

#### LOCATION

Indoor or outdoor

#### LENGTH

2500mm

#### APPROVALS

##### SLIP RESISTANCE TESTING


- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

##### FIRE TESTING

- ✓ AS/ISO 9239.1

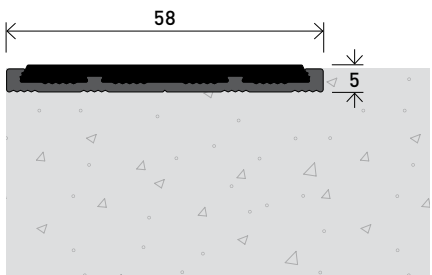



## PEMKO® URBAN EDGING 10X65X5

### PRODUCT CODES:

**NATURAL ANODISED** DE0700C

Grey silicon carbide infill

**BLACK ANODISED** DE0700B

Black silicon carbide infill

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Adhesive. Optional screw-fix (colour matched screws and plugs supplied)

### LOCATION

Indoor or outdoor

### LENGTH

3200mm

### APPROVALS

#### SLIP RESISTANCE TESTING



- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

#### FIRE TESTING

- ✓ AS/ISO 9239.1

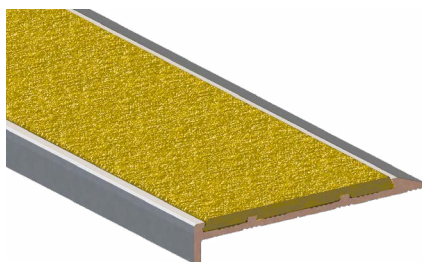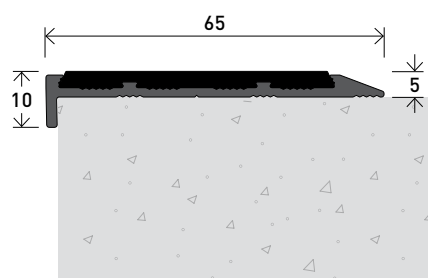

## PEMKO® URBAN EDGING 10X65X5

### PRODUCT CODES:

**NATURAL ANODISED** DE0700CY

Yellow silicon carbide infill

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Adhesive. Optional screw-fix (screws and plugs supplied)

### LOCATION

Indoor or outdoor

### LENGTH

3200mm



### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A

#### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

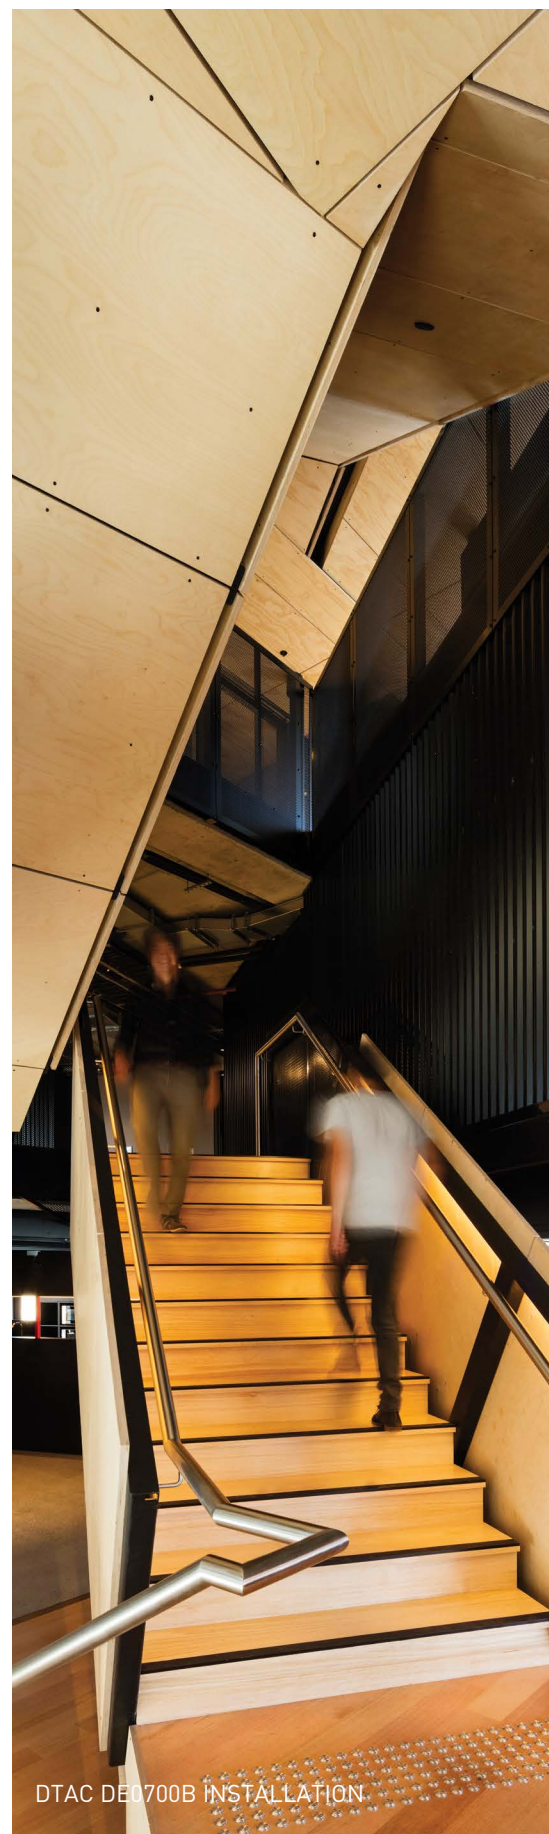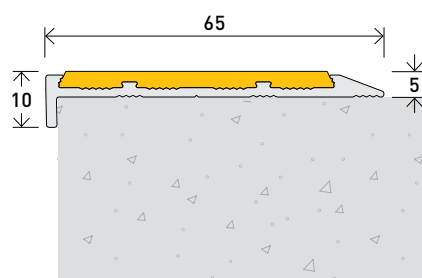


DTAC DE0700B INSTALLATION



## URBAN

DTAC PEMKO® Urban edging and stair treads combine a high quality finish with high slip resistant properties. Manufactured from T5 extruded aluminium, the Urban design features alternate stripes of silicon carbide infill.

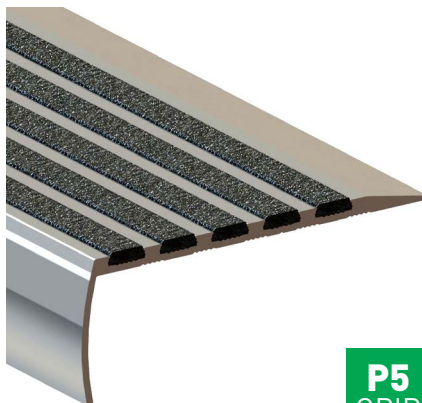

**P5**  
GRIP

### PEMKO® URBAN EDGING 35X95X5

#### PRODUCT CODES:

##### MILL FINISHED

Black silicon carbide  
infill

DE0730MF

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Adhesive. Optional screw-fix (colour matched screws and plugs supplied)

#### LOCATION

Indoor or outdoor

#### LENGTH

3000mm

#### APPROVALS

##### SLIP RESISTANCE TESTING


- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

##### FIRE TESTING

- ✓ AS/ISO 9239.1

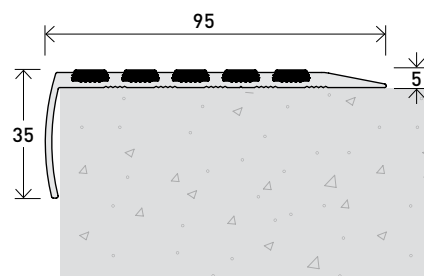

**P5**  
GRIP

### PEMKO® URBAN EDGING 35X135X5

#### PRODUCT CODES:

##### MILL FINISHED

Black silicon carbide  
infill

DE0740MF

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Adhesive. Optional screw-fix (colour matched screws and plugs supplied)

#### LOCATION

Indoor or outdoor

#### LENGTH

3000mm

#### APPROVALS

##### SLIP RESISTANCE TESTING


- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

##### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

##### FIRE TESTING

- ✓ AS/ISO 9239.1

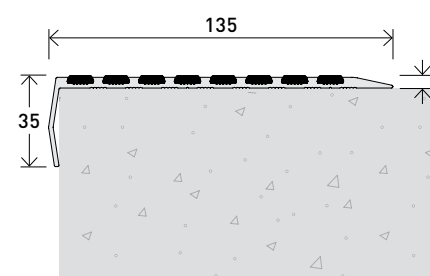



**P5**  
GRIP

## PEMKO® URBAN EDGING 10X75X5

### PRODUCT CODES:

**MILL FINISHED** DE0750MF  
Black silicon carbide  
infill

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl,  
vitrified porcelain, ceramics, glass,  
metals

### FIXING

Adhesive. Optional screw-fix  
(colour matched screws and plugs  
supplied)

### LOCATION

Indoor or outdoor

### LENGTH

3000mm

### APPROVALS

#### SLIP RESISTANCE TESTING


- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

#### FIRE TESTING

- ✓ AS/ISO 9239.1

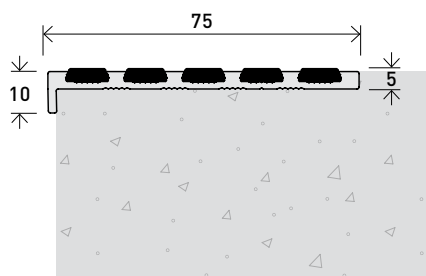

**P5**  
GRIP

## PEMKO® URBAN EDGING 50X5

### PRODUCT CODES:

**MILL FINISHED** DE0760MF  
Black silicon carbide  
infill

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl,  
vitrified porcelain, ceramics, glass,  
metals

### FIXING

Adhesive. Optional screw-fix  
(colour matched screws and plugs  
supplied)

### LOCATION

Indoor or outdoor

### LENGTH

3200mm

### APPROVALS

#### SLIP RESISTANCE TESTING


- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

#### FIRE TESTING

- ✓ AS/ISO 9239.1

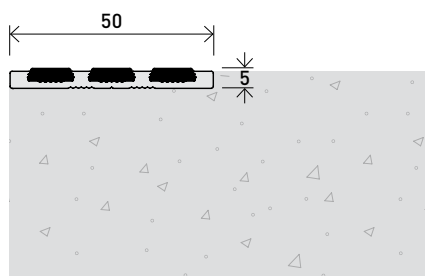

**P5**  
GRIP

## PEMKO® URBAN EDGING 50X5

### PRODUCT CODES:

**MILL FINISHED** DE0760MFY  
Yellow silicon carbide  
infill

### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl,  
vitrified porcelain, ceramics, glass,  
metals

### FIXING

Adhesive. Optional screw-fix  
(screws and plugs supplied)

### LOCATION

Indoor or outdoor

### LENGTH

3000mm


### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

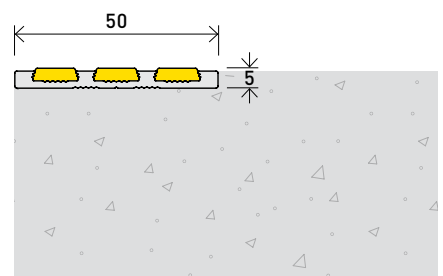



DTAC DE0700C INSTALLATION

# RUGGED™

# DTAC®



## RUGGED™

DTAC PEMKO® Rugged™ Designer Stair Edging range has high slip resistance and excellent durability. Suitable for fixing to open grate metal stairs, making it suitable for most industrial applications and can be glue or screw fixed on concrete, timber and other substrates. Manufactured from fibre glass reinforced polymer, the design is available in yellow and black, featuring 1500mm and 1800mm lengths.



### PEMKO® RUGGED EDGING 10X70X3 (YELLOW)

**PRODUCT CODES:**

**1800MM**

**DEF0020Y**



### PEMKO® RUGGED EDGING 10X70X3 (BLACK)

**PRODUCT CODES:**

**3200MM**

**DEF0010B**

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Screw-fixed onto metal stairs and gratings (fixings not supplied). Adhesive fix for all other substrates.

#### LOCATION

Indoor or outdoor

#### APPROVALS

##### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

##### LUMINANCE TESTING

✓ AS 1428.1 Appendix B3

#### SUITABLE FOR SUBSTRATES

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### FIXING

Screw-fixed onto metal stairs and gratings (fixings not supplied). Adhesive fix for all other substrates.

#### LOCATION

Indoor or outdoor



#### APPROVALS

##### SLIP RESISTANCE TESTING

✓ AS 4586 Appendix A

##### LUMINANCE TESTING

✓ AS 1428.1 Appendix B3

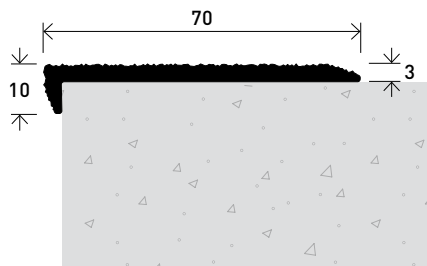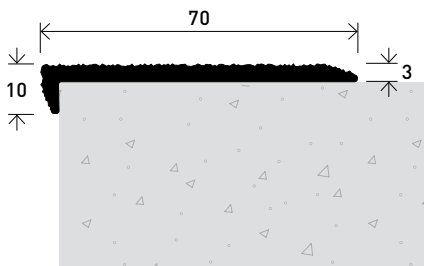

## PEMKO® THRESHOLD PLATES

Pemko® threshold plates are hard anodised, aluminium extrusions that are fitted to the sill under doors; they provide a clean delineation between adjacent floor surfaces.

A weather barrier in themselves, threshold plates provide an optimum sealing surface for door bottom seals. Being hard wearing, threshold plates offer an elevated sealing surface which, in the case of door bottom sweep seals, prevents contact or excessive resistance over carpeted or uneven floors.

DTAC threshold plates have been designed to withstand the day-to-day rigours of heavy pedestrian and wheeled traffic encountered in commercial buildings.

Where disabled access is a requirement, ensure that the threshold plate is suitable for wheeled access and that it conforms to the relevant building code or standard.



### PEMKO® THRESHOLD PLATE 44X11

#### PRODUCT CODES:

|               |               |
|---------------|---------------|
| <b>1000MM</b> | <b>DP0041</b> |
| <b>2000MM</b> | <b>DP0042</b> |
| <b>3000MM</b> | <b>DP0043</b> |

#### FIXING

Screw-fixed (screws supplied).  
Holes pre-punched.

#### LOCATION

Door sill

#### COLOUR

Natural anodised

#### APPROVALS

##### ACCESS & MOBILITY


NZ: NZ BC Compliance Doc. D1/  
AS1 1.3.2  
UK/EU: Approved Document M

##### FIRE

AUS/NZ: NCC Spec. C3.4.  
AS1530.4 & AS/NZS 1905.1. NZ BC  
Compliance Doc. C/AS1 6.19.2(a) &  
App. C6.1.1.  
UK/EU: Approved Document B. BS  
476 Pt. 20 & 22 (similar to BS EN  
1634-1).

FRL & FRR-/240/30

BAL - FZ when used with a  
BAL rated door bottom seal in  
accordance with AS3959.

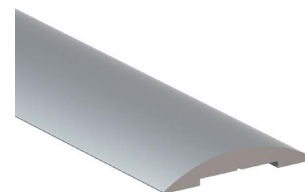

### PEMKO® THRESHOLD PLATE 25X5

#### PRODUCT CODES:

|               |               |
|---------------|---------------|
| <b>1000MM</b> | <b>DP0131</b> |
| <b>2000MM</b> | <b>DP0132</b> |
| <b>3000MM</b> | <b>DP0133</b> |

#### FIXING

Screw-fixed or adhesive (screws  
supplied)

#### LOCATION

Door sill

#### COLOUR

Natural anodised

#### APPROVALS

UL: R37913

##### ACCESS & MOBILITY


AUS: NCC D2.15 & D3.3. AS1428.1  
NZ: NZ BC Compliance Doc. D1/  
AS1 1.3.2  
UK/EU: Approved Document M

##### FIRE

AUS/NZ: NCC Spec. C3.4.  
AS1530.4 & AS/NZS 1905.1. NZ BC  
Compliance Doc. C/AS1 6.19.2(a) &  
App. C6.1.1.  
UK/EU: Approved Document B. BS  
476 Pt. 20 & 22 (similar to BS EN  
1634-1).

FRL & FRR-/240/30

BAL - FZ when used with a  
BAL rated door bottom seal in  
accordance with AS3959.

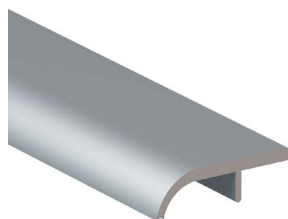

## PEMKO® THRESHOLD PLATE 100X13

### PRODUCT CODES:

|        |        |
|--------|--------|
| 1000MM | DP0191 |
| 2000MM | DP0192 |
| 3000MM | DP0193 |

### FIXING

Screw-fixed (screws supplied)

### LOCATION

Door sill

### COLOUR

Natural anodised

### APPROVALS

#### ACCESS & MOBILITY

NZ: NZ BC Compliance Doc. D1/ AS1 1.3.2

UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4.  
AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.  
UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30

BAL - FZ when used with a BAL rated door bottom seal in accordance with AS3959.

## PEMKO® CARPET EDGE PLATE 38X11

### PRODUCT CODES:

|        |        |
|--------|--------|
| 1000MM | DP0271 |
| 2000MM | DP0272 |
| 3000MM | DP0273 |

### FIXING

Screw-fixed (screws supplied)

### LOCATION

Door sill

### COLOUR

Natural anodised

### APPROVALS

#### ACCESS & MOBILITY

NZ: NZ BC Compliance Doc. D1/ AS1 1.3.2

UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4.  
AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.  
UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30

BAL - FZ when used with a BAL rated door bottom seal in accordance with AS3959.

## PEMKO® THRESHOLD PLATE 127X13

### PRODUCT CODES:

|        |        |
|--------|--------|
| 1000MM | DP0281 |
| 2000MM | DP0282 |
| 3000MM | DP0283 |

### FIXING

Screw-fixed (screws supplied)

### LOCATION

Door sill

### COLOUR

Natural anodised

### APPROVALS

#### ACCESS & MOBILITY

NZ: NZ BC Compliance Doc. D1/ AS1 1.3.2


UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4.  
AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.  
UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30 and FD120

BAL - FZ when used with a BAL rated door bottom seal in accordance with AS3959.

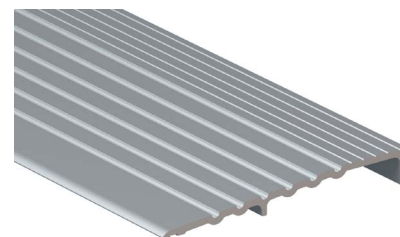

## PEMKO® THRESHOLD PLATE 76X13

### PRODUCT CODES:

|               |               |
|---------------|---------------|
| <b>1000MM</b> | <b>DP0291</b> |
| <b>2000MM</b> | <b>DP0292</b> |
| <b>3000MM</b> | <b>DP0293</b> |

### FIXING

Screw-fixed (screws supplied)

### LOCATION

Door sill

### COLOUR

Natural anodised

### APPROVALS

UL: R37913

### ACCESS & MOBILITY

NZ: NZ BC Compliance Doc. D1/ AS1 1.3.2

UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.

UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30 and FD120

BAL - FZ when used with a BAL rated door bottom seal in accordance with AS3959.

## PEMKO® TRANSITION STRIP 40X7

### PRODUCT CODES:

|               |               |
|---------------|---------------|
| <b>1000MM</b> | <b>DP0661</b> |
| <b>2000MM</b> | <b>DP0662</b> |
| <b>3000MM</b> | <b>DP0663</b> |

### FIXING

Concealed screw-fixed (screws supplied)

### LOCATION

Door sill of internal doors with carpeted sills

### COLOUR

Natural anodised

### APPROVALS

### ACCESS & MOBILITY

AUS: NCC D2.15 & D3.3. AS1428.1

NZ: NZ BC Compliance Doc. D1/ AS1 1.3.2

UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.

UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30

## PEMKO® THRESHOLD RAMP 100X13

### PRODUCT CODES:

|               |               |
|---------------|---------------|
| <b>1000MM</b> | <b>DP0771</b> |
| <b>2000MM</b> | <b>DP0772</b> |
| <b>3000MM</b> | <b>DP0773</b> |

### FIXING

Screw-fixed (screws supplied)

### LOCATION

Door sill

### COLOUR

Natural anodised

### APPROVALS

UL: R37913

### ACCESS & MOBILITY

AUS: NCC D2.15 & D3.3. AS1428.1

NZ: NZ BC Compliance Doc. D1/ AS1 1.3.2

UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.

UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30

BAL - FZ when used with a BAL rated door bottom seal in accordance with AS3959.



## PEMKO® THRESHOLD PLATE 40X5

### PRODUCT CODES:

|               |               |
|---------------|---------------|
| <b>1000MM</b> | <b>DP0821</b> |
| <b>2000MM</b> | <b>DP0822</b> |
| <b>3000MM</b> | <b>DP0823</b> |

### FIXING

Screw-fixed or adhesive (screws supplied)

### LOCATION

Door sill

### COLOUR

Natural anodised

### APPROVALS

**UL:** R37913

### ACCESS & MOBILITY

AUS: NCC D2.15 & D3.3. AS1428.1  
NZ: NZ BC Compliance Doc. D1/AS1 1.3.2  
UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4.  
AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.  
UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30

BAL - FZ when used with a BAL rated door bottom seal in accordance with AS3959.

## PEMKO® RIBBED THRESHOLD PLATE 40X3

### PRODUCT CODES:

|               |               |
|---------------|---------------|
| <b>1000MM</b> | <b>DP0951</b> |
| <b>2000MM</b> | <b>DP0952</b> |
| <b>3000MM</b> | <b>DP0953</b> |

### FIXING

Screw-fixed or adhesive (screws supplied)

### LOCATION

Door sill

### COLOUR

Natural anodised

### APPROVALS

**UL:** R37913

### ACCESS & MOBILITY

AUS: NCC D2.15 & D3.3. AS1428.1  
NZ: NZ BC Compliance Doc. D1/AS1 1.3.2  
UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4.  
AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.  
UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30 and FD240

BAL - FZ when used with a BAL rated door bottom seal in accordance with AS3959.

## PEMKO® THRESHOLD PLATE 40X3

### PRODUCT CODES:

|               |               |
|---------------|---------------|
| <b>1000MM</b> | <b>DP0961</b> |
| <b>2000MM</b> | <b>DP0962</b> |
| <b>3000MM</b> | <b>DP0963</b> |

### FIXING

Screw-fixed or adhesive (screws supplied)

### LOCATION

Door sill

### COLOUR

Natural anodised

### APPROVALS

**UL:** R37913

### ACCESS & MOBILITY


AUS: NCC D2.15 & D3.3. AS1428.1  
NZ: NZ BC Compliance Doc. D1/AS1 1.3.2  
UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4.  
AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.  
UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30 and FD240

BAL - FZ when used with a BAL rated door bottom seal in accordance with AS3959.

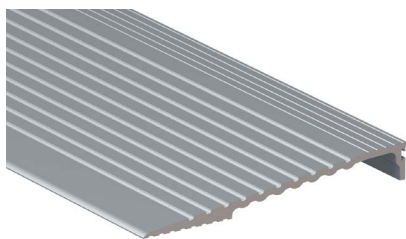

## PEMKO® THRESHOLD RAMP 150X19

### PRODUCT CODES:

|               |               |
|---------------|---------------|
| <b>1000MM</b> | <b>DP0981</b> |
| <b>2000MM</b> | <b>DP0982</b> |
| <b>3000MM</b> | <b>DP0983</b> |

### FIXING

Screw-fixed or adhesive (screws supplied)

### LOCATION

Door sill

### COLOUR

Natural anodised

### APPROVALS

**UL:** R37913

### ACCESS & MOBILITY

AUS: NCC D2.15 & D3.3. AS1428.1  
NZ: NZ BC Compliance Doc. D1/ AS1 1.3.2  
UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4.  
AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.  
UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30

BAL - FZ when used with a BAL rated door bottom seal in accordance with AS3959.

## PEMKO® THRESHOLD RAMP 50X8

### PRODUCT CODES:

|               |               |
|---------------|---------------|
| <b>1000MM</b> | <b>DP1121</b> |
| <b>2000MM</b> | <b>DP1122</b> |
| <b>3000MM</b> | <b>DP1123</b> |

### FIXING

Screw-fixed (screws supplied)

### LOCATION

Door sill

### COLOUR

Natural anodised

### APPROVALS

**UL:** R37913

### ACCESS & MOBILITY

AUS: NCC D2.15 & D3.3. AS1428.1  
NZ: NZ BC Compliance Doc. D1/ AS1 1.3.2  
UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4.  
AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.  
UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30 and FD240

BAL - FZ when used with a BAL rated door bottom seal in accordance with AS3959.

## PEMKO® THRESHOLD PLATE 75X6

### PRODUCT CODES:

|               |               |
|---------------|---------------|
| <b>1000MM</b> | <b>DP1151</b> |
| <b>2000MM</b> | <b>DP1152</b> |
| <b>3000MM</b> | <b>DP1153</b> |

### FIXING

Screw-fixed or adhesive (screws supplied)

### LOCATION

Door sill

### COLOUR

Natural anodised

### APPROVALS

#### ACCESS & MOBILITY



AUS: NCC D2.15 & D3.3. AS1428.1  
NZ: NZ BC Compliance Doc. D1/ AS1 1.3.2  
UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4.  
AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.  
UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30 and FD180

BAL - FZ when used with a BAL rated door bottom seal in accordance with AS3959.

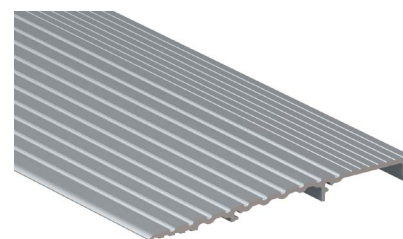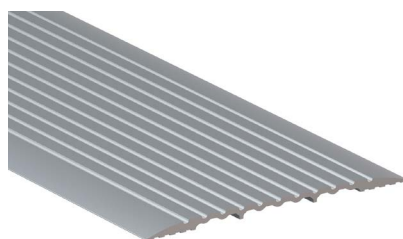

## PEMKO® THRESHOLD PLATE 100X6

### PRODUCT CODES:

|               |               |
|---------------|---------------|
| <b>1000MM</b> | <b>DP1161</b> |
| <b>2000MM</b> | <b>DP1162</b> |
| <b>3000MM</b> | <b>DP1163</b> |

### FIXING

Screw-fixed or adhesive (screws supplied)

### LOCATION

Door sill

### COLOUR

Natural anodised

### APPROVALS

#### ACCESS & MOBILITY

NZ: NZ BC Compliance Doc. D1/ AS1 1.3.2

UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.  
UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30

BAL - FZ when used with a BAL rated door bottom seal in accordance with AS3959.

## PEMKO® THRESHOLD PLATE 150X6

### PRODUCT CODES:

|               |               |
|---------------|---------------|
| <b>1000MM</b> | <b>DP1371</b> |
| <b>2000MM</b> | <b>DP1372</b> |
| <b>3000MM</b> | <b>DP1373</b> |

### FIXING

Screw-fixed or adhesive (screws supplied)

### LOCATION

Door sill

### COLOUR

Natural anodised

### APPROVALS

UL: R37913

#### ACCESS & MOBILITY

AUS: NCC D2.15 & D3.3. AS1428.1

NZ: NZ BC Compliance Doc. D1/ AS1 1.3.2

UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.  
UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30 and FD180

BAL - FZ when used with a BAL rated door bottom seal in accordance with AS3959.

## PEMKO® THRESHOLD RAMP 150X13

### PRODUCT CODES:

|               |               |
|---------------|---------------|
| <b>1000MM</b> | <b>DP1381</b> |
| <b>2000MM</b> | <b>DP1382</b> |
| <b>3000MM</b> | <b>DP1383</b> |

### FIXING

Screw-fixed or adhesive (screws supplied)

### LOCATION

Door sill

### COLOUR

Natural anodised

### APPROVALS

UL: R37913

#### ACCESS & MOBILITY

AUS: NCC D2.15 & D3.3. AS1428.1

NZ: NZ BC Compliance Doc. D1/ AS1 1.3.2

UK/EU: Approved Document M

### FIRE

AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.  
UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30 and FD180

BAL - FZ when used with a BAL rated door bottom seal in accordance with AS3959.


# STAIR EDGING SYSTEMS FOR CARPET

DTAC's range of PEMKO® stair edging systems for carpet has transformed the manner in which you can detail a carpeted stair edge. The DTAC edging series provide a practical and aesthetically pleasing approach to slip prevention and carpet edge protection.

With several designs and finishes available for carpeted stairs, our range of edging and stair treads provides an NCC compliant solution with a flawless finish.

- Suitable for carpet thicknesses of 6-10mm
- Escutcheon plates available for stairs with exposed ends
- Designed to comply with AS 1428.1
- Tested for compliance with luminance and slip resistance requirements
- Backed by 2 year warranty



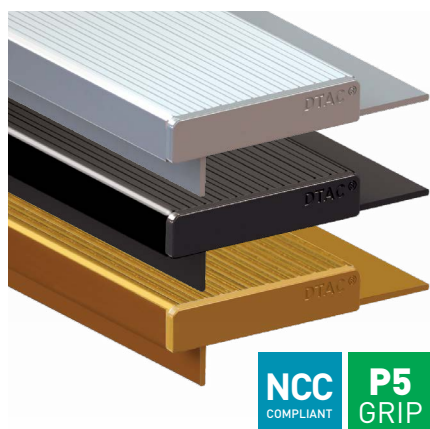

## PEMKO® CORDUROY CARPET EDGING SYSTEM 10X50X3

### PRODUCT CODES:

|                      |         |
|----------------------|---------|
| NATURAL ANODISED     | DE0630C |
| BLACK ANODISED       | DE0630B |
| BRIGHT GOLD ANODISED | DE0630G |

### SUITABLE FOR SUBSTRATES

Carpet, carpet tiles

### FIXING

Screw-fixed or adhesive (screws and plugs supplied).

### LOCATION

Indoor or outdoor

### LENGTH

2500mm (DE0630G)  
3200mm (DE0630C & DE0630B)


### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

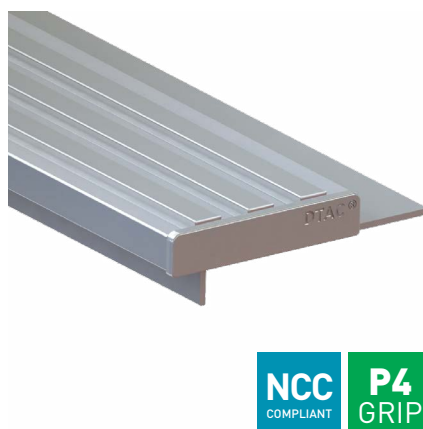

## PEMKO® PINSTRIPE CARPET EDGING SYSTEM 10X50X3

### PRODUCT CODES:

|                  |         |
|------------------|---------|
| NATURAL ANODISED | DE0640C |
|------------------|---------|

### SUITABLE FOR SUBSTRATES

Carpet, carpet tiles

### FIXING

Screw-fixed or adhesive (screws and plugs supplied).

### LOCATION

Indoor

### LENGTH

2500mm


### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

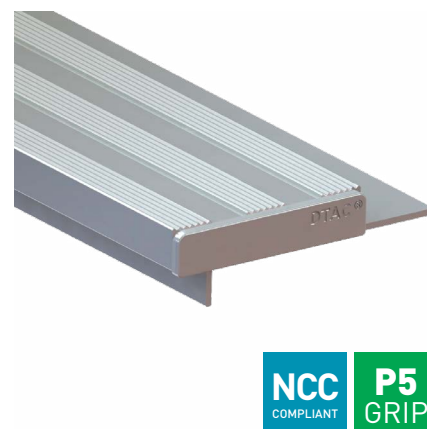

## PEMKO® PLEAT CARPET EDGING SYSTEM 10X50X3

### PRODUCT CODES:

|                  |         |
|------------------|---------|
| NATURAL ANODISED | DE0650C |
|------------------|---------|

### SUITABLE FOR SUBSTRATES

Carpet, carpet tiles

### FIXING

Screw-fixed or adhesive (screws and plugs supplied).

### LOCATION

Indoor or outdoor

### LENGTH

2500mm




### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

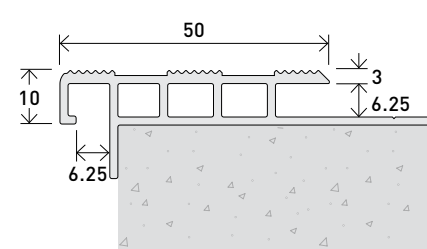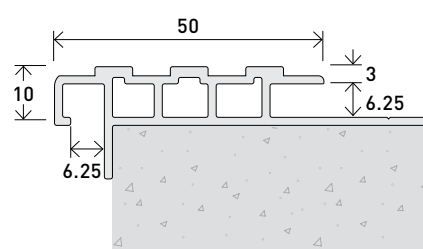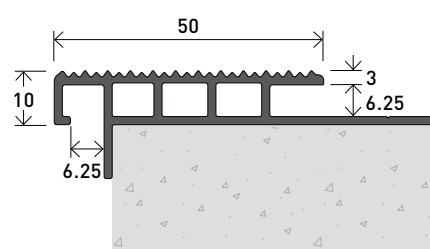




## PEMKO® STITCH CARPET EDGING SYSTEM 10X50X3

### PRODUCT CODES:

**NATURAL ANODISED** DE0660C

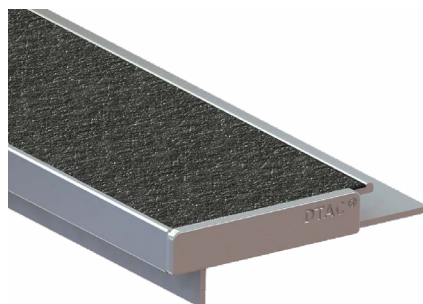


## PEMKO® SUEDE CARPET EDGING SYSTEM 10X55X3

### PRODUCT CODES:

**NATURAL ANODISED** DE0670C

Slip resistant insert

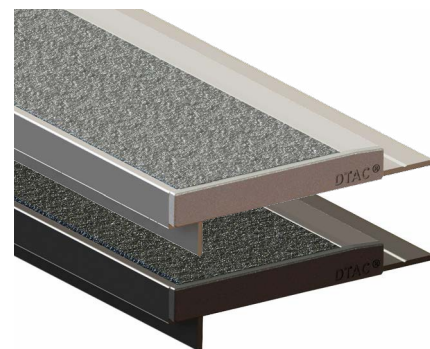

## PEMKO® URBAN CARPET EDGING SYSTEM 10X65X3

### PRODUCT CODES:

**NATURAL ANODISED** DE0780C

Grey silicon carbide infill

**BLACK ANODISED** DE0780B

Black silicon carbide infill

### SUITABLE FOR SUBSTRATES

Carpet, carpet tiles

### FIXING

Screw-fixed or adhesive (screws and plugs supplied).

### LOCATION

Indoor

### LENGTH

2500mm

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

### SUITABLE FOR SUBSTRATES

Carpet, carpet tiles

### FIXING

Screw-fixed or adhesive (screws and plugs supplied).

### LOCATION

Indoor

### LENGTH

2500mm

### APPROVALS

#### SLIP RESISTANCE TESTING

- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

### SUITABLE FOR SUBSTRATES

Carpet, carpet tiles

### FIXING

Screw-fixed or adhesive (screws and plugs supplied).

### LOCATION

Indoor or outdoor

### LENGTH

2500mm

### APPROVALS

#### SLIP RESISTANCE TESTING




- ✓ AS 4586 Appendix A
- ✓ AS 4586 Appendix B
- ✓ AS 4586 Appendix C
- ✓ AS 4586 Appendix D

#### LUMINANCE TESTING

- ✓ AS 1428.1 Appendix B3

#### FIRE TESTING

- ✓ AS/ISO 9239.1

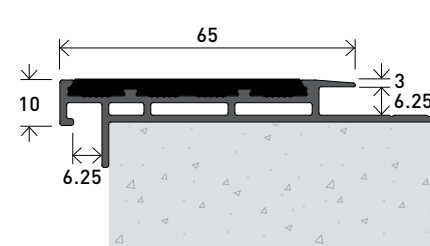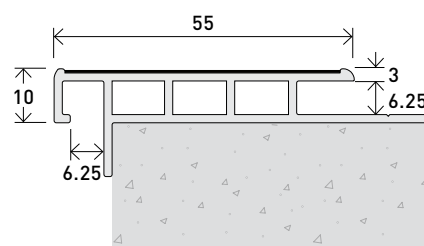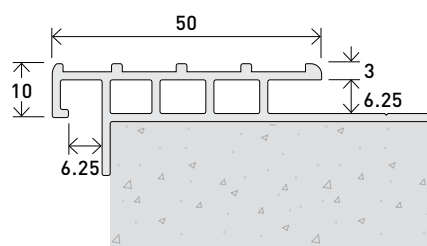

# URBAN EDGE PROTECTORS

In today's modern landscape, seats, benches and garden beds are exposed to damage caused by skateboards, rollerblades and BMX bikes.

The damage and, in the most extreme cases, destruction of these unprotected surfaces, often render the exposed edge of a seat or bench unsafe and hazardous, costing thousands of dollars to repair or totally replace. In the case of timber seats, splinters are likely to occur. With stone and masonry cracks and chunks of material eventuate leaving the surface unsightly and very uncomfortable for the resting pedestrian.

DTAC Urban Edge Protectors assist in the deterrence and prevention of damage to exposed edges in urban environments.

Without DTAC Urban Edge Protectors, damage and injury may result requiring a vigilant monthly maintenance program to repair the constant destruction including chipping paint, cracked capping, waxed/marked walls and damaged handrails.

Positioned on the side of ledges, steps, planter boxes, garden edges, seating, benches and even handrails, the DTAC range of edge protectors can be placed at regular intervals in critical locations that are likely to be prone to damage. Installing DTAC bars and buttons will enable those in these situations to reclaim their spaces and avoid vast sums of time and money that would otherwise be spent cleaning and repairing their property.

DTAC's edge protector range combines deterrence with asset protection. Their appearance is discreetly blended within their environment but pronounced enough to deter. Good building and urban design coupled with planning and appropriate installation can make DTAC Edge Protectors a design feature promoting a safe environment for all persons.

Prevention is always better than the cure. DTAC edge protectors whether incorporated at the conception of a project or retrofitted to an existing environment provide the opportunity for seamless integration through design, product selection and placement.

**DTAC<sup>®</sup>**



DTAC DEP0040 INSTALLATION

# BUTTON ROUND

DTAC®



## BUTTON ROUND

Manufactured in 316 marine grade stainless steel or solid brass, the DTAC round button edge protector helps to deter and prevent unwanted "grinding" damage from skateboards, rollerblades and BMX bikes.



### EDGE PROTECTOR BUTTON ROUND (STAINLESS STEEL)

**PRODUCT CODE:** DEP0010

#### **SUITABLE FOR SUBSTRATES**

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### **FIXING**

Drill and glue or diamond core and glue

#### **LOCATION**

Outdoor



### EDGE PROTECTOR BUTTON ROUND (BRASS)

**PRODUCT CODE:** DEP0300

#### **SUITABLE FOR SUBSTRATES**



Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

#### **FIXING**

Drill and glue or diamond core and glue

#### **LOCATION**

Outdoor

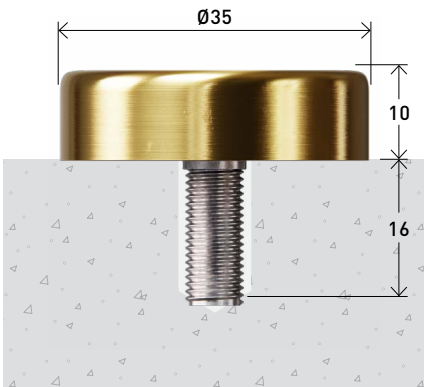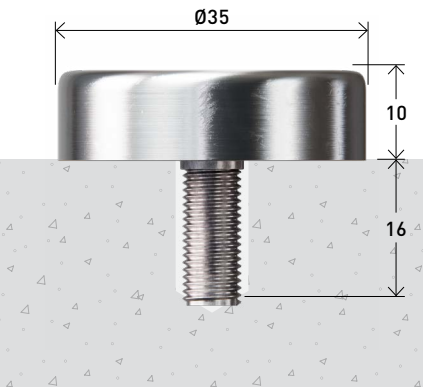

# BUTTON BEVELLED

DTAC®



## BUTTON BEVELLED

Manufactured in 316 marine grade stainless steel or solid brass, the DTAC bevelled button edge protector helps to deter and prevent unwanted "grinding" damage from skateboards, rollerblades and BMX bikes.



### EDGE PROTECTOR BUTTON BEVELLED (STAINLESS STEEL)

**PRODUCT CODE:** DEP0020

**SUITABLE FOR SUBSTRATES**

Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

**FIXING**

Drill and glue or diamond core and glue

**LOCATION**

Outdoor



### EDGE PROTECTOR BUTTON BEVELLED (BRASS)

**PRODUCT CODE:** DEP0301

**SUITABLE FOR SUBSTRATES**



Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

**FIXING**

Drill and glue or diamond core and glue

**LOCATION**

Outdoor

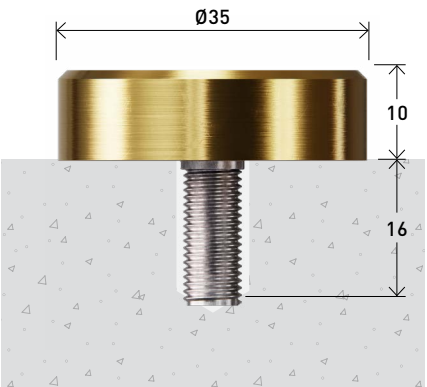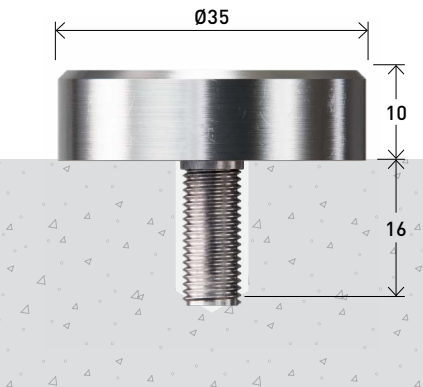



## BAR THIN

Manufactured in 316 marine grade stainless steel, the DTAC thin bar edge protector helps to deter and prevent unwanted “grinding” damage from skateboards, rollerblades and BMX bikes.



### EDGE PROTECTOR BAR (THIN)

**PRODUCT CODE:** DEP0040

**SUITABLE FOR SUBSTRATES**



Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

**FIXING**

Drill and glue or diamond core and glue

**LOCATION**

Outdoor

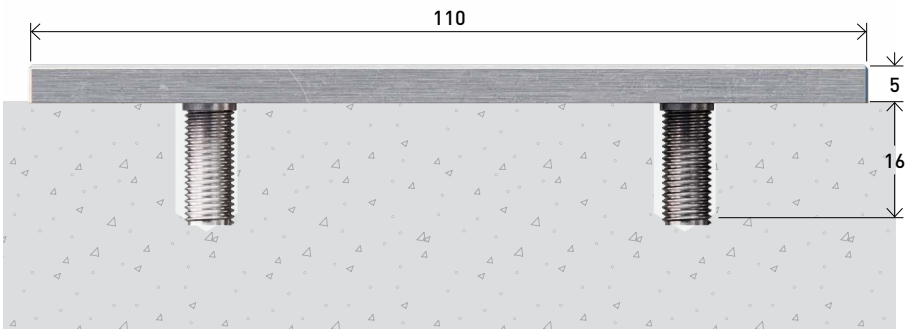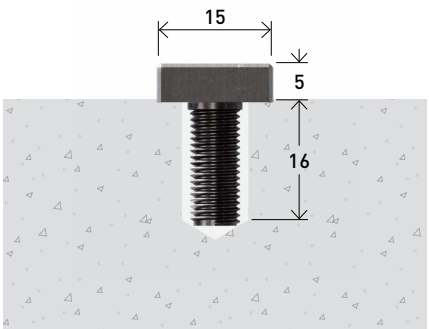



## BAR THICK

Manufactured in 316 marine grade stainless steel, the DTAC thick bar edge protector helps to deter and prevent unwanted “grinding” damage from skateboards, rollerblades and BMX bikes.



## EDGE PROTECTOR BAR (THICK)

**PRODUCT CODE:** DEP0060

### SUITABLE FOR SUBSTRATES


Stone, masonry, timber, vinyl, vitrified porcelain, ceramics, glass, metals

### FIXING

Drill and glue or diamond core and glue

### LOCATION

Outdoor

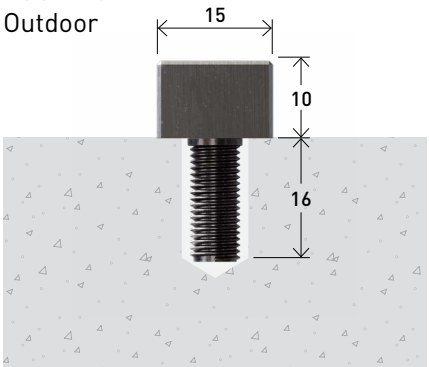

# HANDRAIL TACTILE INDICATORS


DTAC Handrail Tactile Indicators (HRTI's) are used when handrails are not continuous and/or no tactile ground surface indicators are required.

HRTI's assist the visually impaired to safely negotiate stairs by indicating where a handrail and stairway ends and also help to deter and prevent unwanted "grinding" damage from skateboards, rollerblades and BMX bikes.

Handrails themselves should be designed and installed to comply with AS 1428.1 and with the NCC Section D3.8.

DTAC®

DTAC DHB0010 INSTALLATION

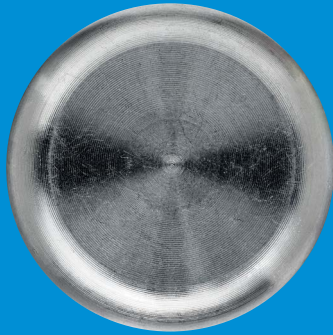

## STAINLESS STEEL

Manufactured in 316 marine grade stainless steel, the DTAC handrail button has been designed to meet the requirements of AS/NZS 1428.4.1.



**NCC**  
COMPLIANT

### HANDRAIL BUTTON (STAINLESS STEEL)

**PRODUCT CODE:** DHB0010

#### SUITABLE FOR SUBSTRATES


Masonry, timber, metals

#### FIXING

Drill and glue

#### LOCATION

Indoor or outdoor

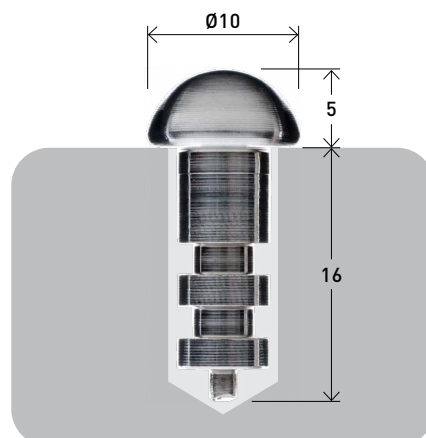


# STAINLESS STEEL



|           |    |            |    |          |    |
|-----------|----|------------|----|----------|----|
| DCS0010   | 9  | DIRP0705B  | 28 | DP1371   | 57 |
| DCS0020   | 9  | DIRP0705LG | 29 | DP1372   | 57 |
| DE0100B   | 40 | DIRP0705W  | 29 | DP1373   | 57 |
| DE0100C   | 40 | DIRP0705Y  | 29 | DP1381   | 57 |
| DE0100G   | 40 | DIT0010    | 32 | DP1382   | 57 |
| DE0110B   | 40 | DIT0020    | 32 | DP1383   | 57 |
| DE0110C   | 40 | DIT0030    | 34 | DT0100   | 8  |
| DE0110G   | 40 | DIT0040    | 34 | DT0101   | 8  |
| DE0200B   | 41 | DIT0070    | 33 | DT0103   | 9  |
| DE0200C   | 41 | DIT0080    | 33 | DT0106   | 9  |
| DE0210B   | 41 | DIT0090    | 35 | DT0110   | 12 |
| DE0210C   | 41 | DIT0100    | 35 | DT0111   | 12 |
| DE0300B   | 42 | DP0041     | 52 | DT0113   | 13 |
| DE0300C   | 42 | DP0042     | 52 | DT0116   | 13 |
| DE0310B   | 42 | DP0043     | 52 | DT0120   | 10 |
| DE0310C   | 42 | DP0131     | 52 | DT0122   | 11 |
| DE0400B   | 43 | DP0132     | 52 | DT0123   | 11 |
| DE0400C   | 43 | DP0133     | 52 | DT0125   | 10 |
| DE0410B   | 43 | DP0191     | 53 | DT0130   | 13 |
| DE0410C   | 43 | DP0192     | 53 | DT0200   | 14 |
| DE0500B   | 44 | DP0193     | 53 | DT0200Y  | 16 |
| DE0500C   | 44 | DP0271     | 53 | DT0201   | 14 |
| DE0510B   | 44 | DP0272     | 53 | DT0210   | 15 |
| DE0510C   | 44 | DP0273     | 53 | DT0211   | 15 |
| DE0630B   | 60 | DP0281     | 53 | DT0212   | 17 |
| DE0630C   | 60 | DP0282     | 53 | DT0213   | 17 |
| DE0630G   | 60 | DP0283     | 53 | DT0300   | 18 |
| DE0640C   | 60 | DP0291     | 54 | DT0301   | 18 |
| DE0650C   | 60 | DP0292     | 54 | DT0306   | 19 |
| DE0660C   | 61 | DP0293     | 54 | DT0310   | 20 |
| DE0670C   | 61 | DP0661     | 54 | DT0311   | 20 |
| DE0680B   | 46 | DP0662     | 54 | DT0312   | 19 |
| DE0680C   | 46 | DP0663     | 54 | DT0400B  | 21 |
| DE0690B   | 46 | DP0771     | 54 | DT0400Y  | 21 |
| DE0690C   | 46 | DP0772     | 54 | DT0600B  | 22 |
| DE0700B   | 47 | DP0773     | 54 | DT0600BL | 23 |
| DE0700C   | 47 | DP0821     | 55 | DT0600LG | 22 |
| DE0700CY  | 47 | DP0822     | 55 | DT0600W  | 23 |
| DE0730MF  | 48 | DP0823     | 55 | DT0600Y  | 23 |
| DE0740MF  | 49 | DP0951     | 55 | DWU0010  | 36 |
| DE0750MF  | 49 | DP0952     | 55 | DWU0011  | 36 |
| DE0760MF  | 50 | DP0953     | 55 | DWU0012  | 37 |
| DE0760MFY | 50 | DP0961     | 55 | DWU0013  | 37 |
| DE0780B   | 61 | DP0962     | 55 | DWU0014  | 37 |
| DE0780C   | 61 | DP0963     | 55 |          |    |
| DEF0010B  | 51 | DP0981     | 56 |          |    |
| DEF0020Y  | 51 | DP0982     | 56 |          |    |
| DEP0010   | 64 | DP0983     | 56 |          |    |
| DEP0020   | 65 | DP1121     | 56 |          |    |
| DEP0040   | 66 | DP1122     | 56 |          |    |
| DEP0060   | 67 | DP1123     | 56 |          |    |
| DEP0300   | 64 | DP1151     | 56 |          |    |
| DEP0301   | 65 | DP1152     | 56 |          |    |
| DHB0010   | 70 | DP1153     | 56 |          |    |
| DIR0120   | 27 | DP1161     | 57 |          |    |
| DIR0130   | 27 | DP1162     | 57 |          |    |
| DIR0140   | 27 | DP1163     | 57 |          |    |



# DTAC<sup>®</sup>

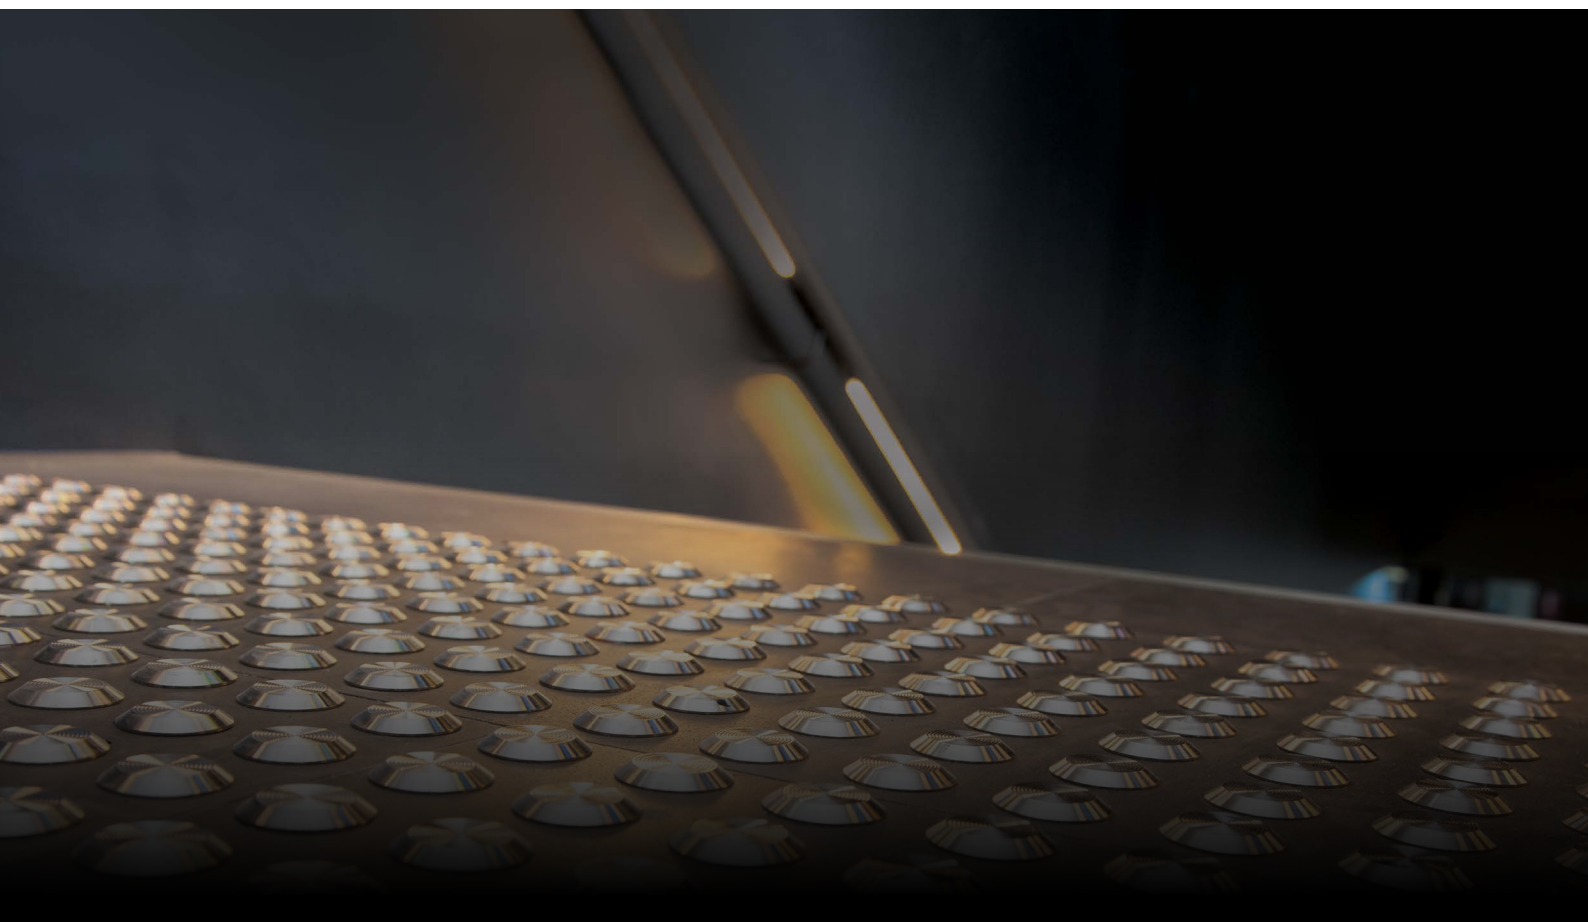

## **DTAC PTY LTD**

ABN 41 093 070 127  
ACN 093 070 127



## **DTAC PROJECT MANAGEMENT PTY LTD**

ABN 88 099 729 003  
ACN 009 972 9003



## **CONTACT DETAILS**

T: 1300 793 478  
E: [sales@dtac.com.au](mailto:sales@dtac.com.au)  
[www.dtac.com.au](http://www.dtac.com.au)



## **POSTAL ADDRESS**

PO BOX 5059  
South Melbourne  
VIC Australia 3205



## **OFFICE ADDRESS**

4/11-12 Phillip Court  
Port Melbourne VIC  
Australia 3207