


# STAINLESS STEEL CLASSIC ECOTAC® DIRECTIONAL TACTILE

P5  
GRIP

PRODUCT CODE: DIR0120

RANGE	Directional Tactile
DESIGN	Classic Ecotac®
MATERIAL	316 marine grade stainless steel
LOCATION	Indoor or Outdoor

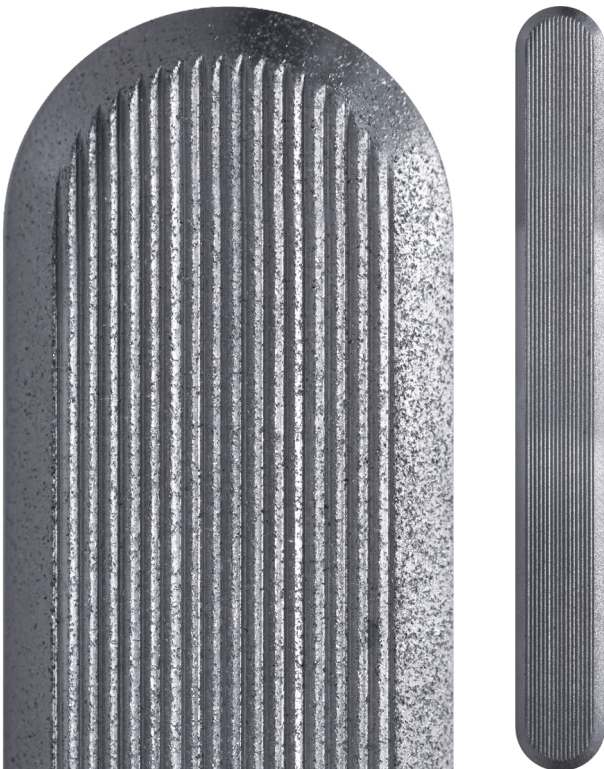

## FEATURES & BENEFITS

Machined, grooved design on the horizontal face with a smooth outer edge

An environmentally friendly directional tactile, featuring a cupped underside that uses less stainless steel putting less demand on resources

Designed to comply with AS/NZS 1428.4.1 (Section 3.2 Directional TGSIs)

Complies with the NCC (D4D9 Tactile Indicators) and Disability (Access to Premises—Buildings) standards to meet the deemed-to-satisfy provisions

Complies with slip resistance requirements as detailed in HB 198

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST AS 4586 APPENDIX A: Wet Pendulum Test

FOUR S 96 SLIDER = 60 CLASS = P5

TRL 55 SLIDER = 74 CLASS = P5

TEST AS 4586 APPENDIX B: Dry Floor Friction Test

MEAN COF = 0.90 CLASS = D1

TEST AS 4586 APPENDIX C: Wet/Barefoot Ramp Test

MEAN ANGLE OF INCLINATION = > 35° CLASS = C

TEST AS 4586 APPENDIX D: Oil/Wet Ramp Test

CORRECTED MEAN OVERALL ACCEPTANCE ANGLE = > 35° CLASS = R13

## LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSi, see: AS/NZS 1428.4.1:2009.


TEST AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3

LIGHT REFLECTANCE VALUE / WET = 21.11

LIGHT REFLECTANCE VALUE / DRY = 28.92

# STAINLESS STEEL CLASSIC ECOTAC® DIRECTIONAL TACTILE INSTALLATION & APPLICATION


**SUBSTRATE** Stone / Masonry / Timber / Vinyl



**CODE** DIR0120

**FIXING** Drill and pressure fit  
(M8 x 25mm hole)


**SUBSTRATE** Vitrified Porcelain / Ceramics / Glass / Metals



**CODE** DIR0120

**FIXING** Drill and pressure fit  
(M8 x 25mm hole)

**SIDE PROFILE**

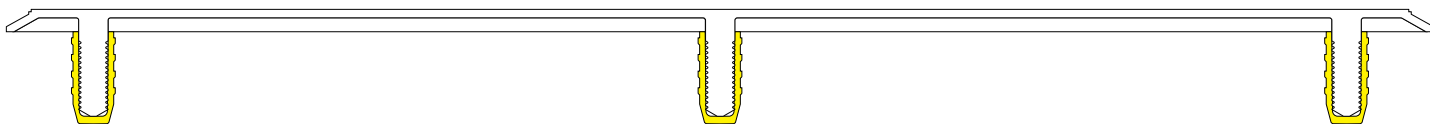

**CODE** DIR0120

**SIZE** L290 x W35 x H5mm