

SILICON CARBIDE CLASSIC DIRECTIONAL TACTILE

P5
GRIP

PRODUCT CODE: DIR0140

RANGE	Directional Tactile
DESIGN	Classic Silicon Carbide
MATERIAL	316 marine grade stainless steel with silicon carbide infill
LOCATION	Indoor or Outdoor



FEATURES & BENEFITS

Hard wearing, silicon carbide inserted into the horizontal face with a smooth machined outer edge

Designed to comply with AS/NZS 1428.4.1 (Section 3.2 Directional TGSIs)

Complies with the NCC (D4D9 Tactile Indicators) and Disability (Access to Premises—Buildings) standards to meet the deemed-to-satisfy provisions

Complies with slip resistance requirements as detailed in HB 198

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 60 CLASS = P5
TRL 55 SLIDER	= 61 CLASS = P5


LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSIs, see: AS/NZS 1428.4.1:2009.

TEST	AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3
LIGHT REFLECTANCE VALUE / WET	= 4.42
LIGHT REFLECTANCE VALUE / DRY	= 5.11

SILICON CARBIDE CLASSIC DIRECTIONAL TACTILE INSTALLATION & APPLICATION


SUBSTRATE Stone / Masonry / Timber / Vinyl



CODE DIR0140

FIXING Drill and pressure fit
(M8 x 25mm hole)


SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



CODE DIR0140

FIXING Drill and pressure fit
(M8 x 25mm hole)

SIDE PROFILE

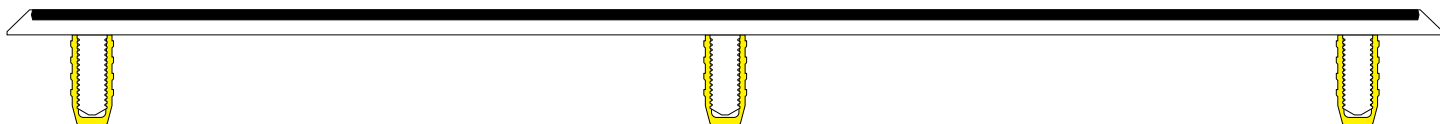

CODE DIR0140

SIZE L290 x W35 x H5mm