


# STAINLESS STEEL TERRACED ECOTAC® DIRECTIONAL TACTILE

P5  
GRIP

PRODUCT CODE: DIR0130

RANGE	Directional Tactile
DESIGN	Terraced Ecotac®
MATERIAL	316 marine grade stainless steel
LOCATION	Indoor or Outdoor

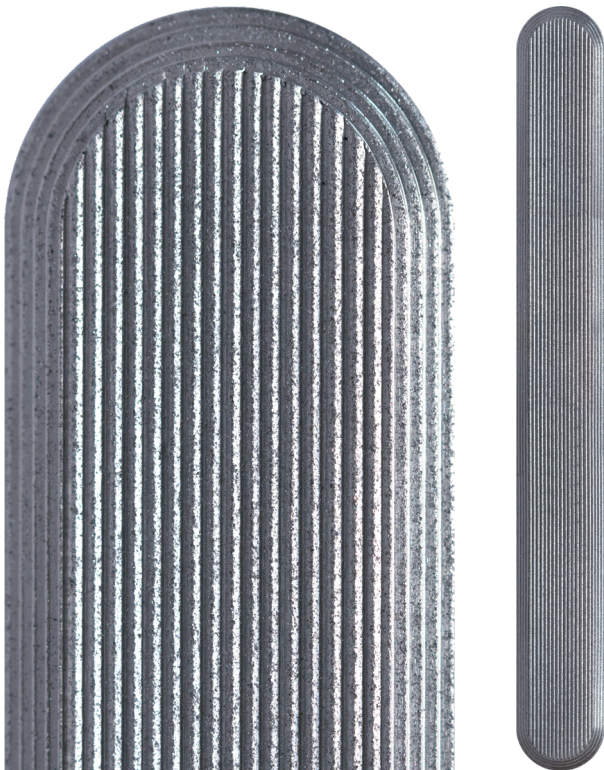

## FEATURES & BENEFITS

Machined, grooved design on the horizontal face with a terraced slip resistant outer edge

An environmentally friendly directional tactile, featuring a cupped underside that uses less stainless steel putting less demand on resources

Designed to comply with AS/NZS 1428.4.1 (Section 3.2 Directional TGSI's)

Complies with the NCC (D4D9 Tactile Indicators) and Disability (Access to Premises—Buildings) standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 61 <b>CLASS</b> = P5
TRL 55 SLIDER	= 70 <b>CLASS</b> = P5
TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= 0.90 <b>CLASS</b> = D1
TEST	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
MEAN ANGLE OF INCLINATION	= > 35° <b>CLASS</b> = C
TEST	AS 4586 APPENDIX D: Oil/Wet Ramp Test
CORRECTED MEAN OVERALL ACCEPTANCE ANGLE	= > 35° <b>CLASS</b> = R13


## LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSI, see: AS/NZS 1428.4.1:2009.

TEST	AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3
LIGHT REFLECTANCE VALUE / WET	= 15.00
LIGHT REFLECTANCE VALUE / DRY	= 22.15

# STAINLESS STEEL TERRACED ECOTAC® DIRECTIONAL TACTILE INSTALLATION & APPLICATION


**SUBSTRATE** Stone / Masonry / Timber / Vinyl



**CODE** DIR0130

**FIXING** Drill and pressure fit  
(M8 x 25mm hole)


**SUBSTRATE** Vitrified Porcelain / Ceramics / Glass / Metals



**CODE** DIR0130

**FIXING** Drill and pressure fit  
(M8 x 25mm hole)

**SIDE PROFILE**

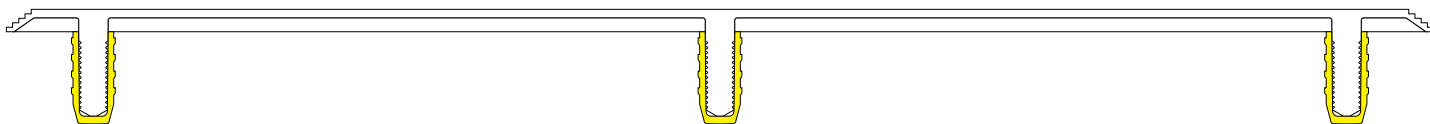

**CODE** DIR0130

**SIZE** L290 x W35 x H5mm