

# PEMCO® ANTI-SLIP TAPE

## 50mm x 20m (BLACK WITH LUMINESCENT STRIP)

**P5  
GRIP**

### PRODUCT CODES: DESCRIPTION:

**DET0040** **BLACK - LUMINESCENT STRIP**

<b>RANGE</b>	Anti-Slip Tape
<b>DESIGN</b>	Pemco®
<b>MATERIAL</b>	PVC tape with 80 grit silicon carbide
<b>LOCATION</b>	Indoor only

### FEATURES & BENEFITS

Suitable for all listed indoor surfaces and substrates only

Complies with the NCC (D3.3 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

### SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

<b>TEST</b>	AS 4586 APPENDIX A: Wet Pendulum Test
<b>FOUR S 96 SLIDER</b>	= 72 <b>CLASS</b> = P5
<b>TRL 55 SLIDER</b>	= 82 <b>CLASS</b> = P5

### LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

<b>TEST</b>	AS 1428.1 APPENDIX B PARAGRAPH B3
<b>LIGHT REFLECTANCE VALUE / WET</b>	= 4.6
<b>LIGHT REFLECTANCE VALUE / DRY</b>	= 5.0



# PEMKO® ANTI-SLIP TAPE

50mm x 20m  
(BLACK WITH  
LUMINESCENT  
STRIP)

## AVAILABLE SIZES

### BLACK WITH LUMINESCENT STRIP



**CODE** DET0040

**SIZE** W50 - L20000mm


## AVAILABLE FINISHES

### BLACK WITH LUMINESCENT STRIP



## SUBSTRATE

Stone / Masonry / Timber

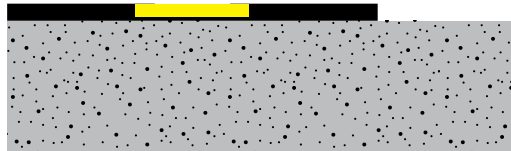

**CODE** DET0040

**FIXING** Self-Adhesive