


# PEMKO® CORDUROY EDGING 10X50X3MM

P5  
GRIP

## PRODUCT CODES: DESCRIPTION:

DE0110C	NATURAL ANODISED
DE0110B	BLACK ANODISED
DE0110G	GOLD ANODISED

RANGE	Stair Nosing & Edging
DESIGN	Corduroy
MATERIAL	6063 T5 extruded aluminium alloy
LOCATION	Indoor or outdoor

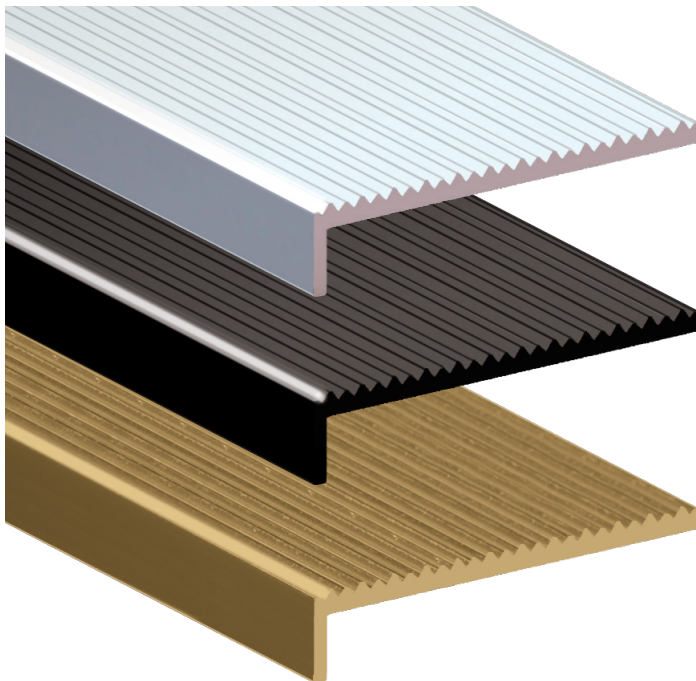

## FEATURES & BENEFITS

Extruded continuous corduroy pattern designed by DTAC in Australia  
Available in exclusive premium quality flat, angle or carpet profiles  
Suitable for all stable finished indoor or outdoor surfaces and substrates  
Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions  
Complies with slip resistance requirements as detailed in HB 198  
Registered Australian design

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 63 CLASS = P5
TRL 55 SLIDER	= 66 CLASS = P5
TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= 0.55 CLASS = D1
TEST	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
MEAN ANGLE OF INCLINATION	= 33° CLASS = C
TEST	AS 4586 APPENDIX D: Oil/Wet Ramp Test
CORRECTED MEAN OVERALL ACCEPTANCE ANGLE	= 31.7° CLASS = R13

## LUMINANCE TESTING



Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
NATURAL	
LIGHT REFLECTANCE VALUE / WET	= 36.09
LIGHT REFLECTANCE VALUE / DRY	= 35.90
BLACK	
LIGHT REFLECTANCE VALUE / WET	= 1.44
LIGHT REFLECTANCE VALUE / DRY	= 1.48
GOLD	
LIGHT REFLECTANCE VALUE / WET	= 31.32
LIGHT REFLECTANCE VALUE / DRY	= 32.34

# PEMKO® CORDUROY EDGING 10X50X3MM FINISHES & SIZES

## AVAILABLE FINISHES & SIZES


### HARD NATURAL ANODISED (25µm)

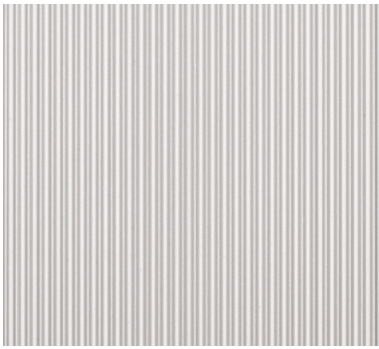

**CODE** DE0110C

**SIZE** H10 x W50 x T3 - L3200mm



### HARD BLACK ANODISED (40µm)

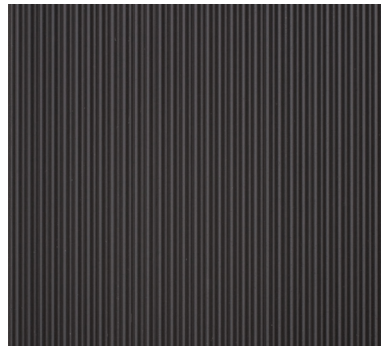

**CODE** DE0110B

**SIZE** H10 x W50 x T3 - L3200mm

### GOLD ANODISED (10µm)

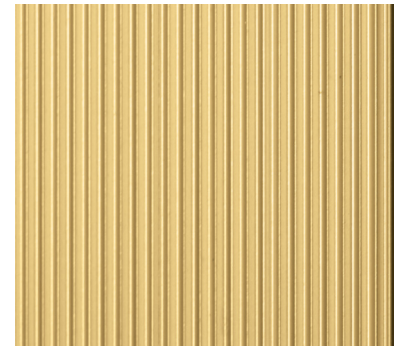


**CODE** DE0110G

**SIZE** H10 x W50 x T3 - L3200mm

# PEMKO® CORDUROY EDGING 10X50X3MM

## INSTALLATION & APPLICATION


**SUBSTRATE** Stone / Masonry / Timber / Vinyl



**CODE** DE0110C / DE0110B /  
DE0110G

**FIXING** Adhesive

**SUBSTRATE** Vitrified Porcelain / Ceramics / Glass / Metals



**CODE** DE0110C / DE0110B /  
DE0110G

**FIXING** Adhesive

**NOTE** *Ensure grout line is  
discrete as illustrated*