

PEMKO® PINSTRIPE EDGING 50X3MM

P4
GRIP

PRODUCT CODES: DESCRIPTION:

DE0200C NATURAL ANODISED


DE0200B BLACK ANODISED

RANGE Stair Nosing & Edging

DESIGN Pinstripe

MATERIAL 6063 T5 extruded aluminium alloy

LOCATION Indoor and Outdoor

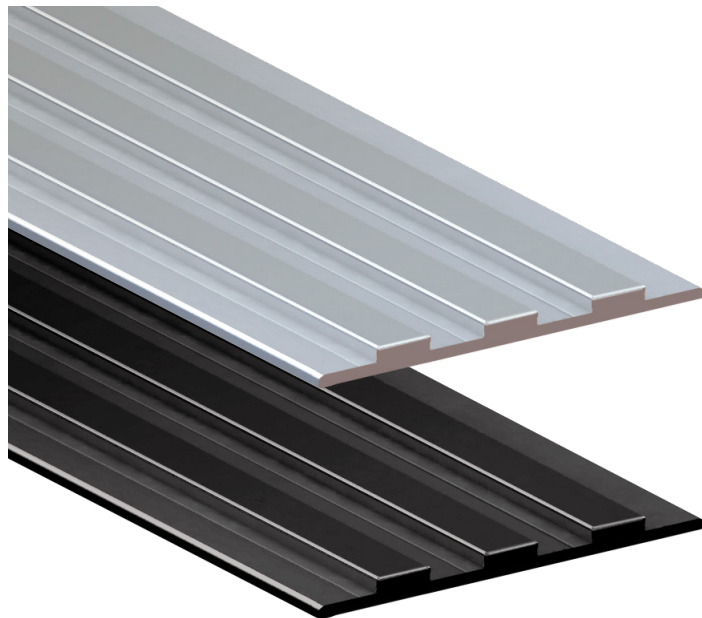

FEATURES & BENEFITS

Extruded intermittent high and low, smooth blunt edge plates designed by DTAC in Australia

Available in exclusive premium quality flat or angle profiles

Suitable for all stable finished indoor or outdoor surfaces and substrates

Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST AS 4586 APPENDIX A: Wet Pendulum Test

FOUR S 96 SLIDER = 54 CLASS = P4

TRL 55 SLIDER = 51 CLASS = P4

TEST AS 4586 APPENDIX B: Dry Floor Friction Test

MEAN COF = 0.55 CLASS = D1

TEST AS 4586 APPENDIX C: Wet/Barefoot Ramp Test

MEAN ANGLE OF INCLINATION = 31° CLASS = C

TEST AS 4586 APPENDIX D: Oil/Wet Ramp Test

CORRECTED MEAN OVERALL ACCEPTANCE ANGLE = 11.6° CLASS = R10

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

TEST AS 1428.1 APPENDIX B PARAGRAPH B3

NATURAL

LIGHT REFLECTANCE VALUE / WET = 63.31

LIGHT REFLECTANCE VALUE / DRY = 62.31

BLACK


LIGHT REFLECTANCE VALUE / WET = 3.04

LIGHT REFLECTANCE VALUE / DRY = 4.02

PEMKO® PINSTRIPE EDGING 50X3MM FINISHES & SIZES

AVAILABLE FINISHES & SIZES

HARD NATURAL ANODISED (25µm)



CODE DE0200C

SIZE W50 x T3 - L2500mm

HARD BLACK ANODISED (40µm)




CODE DE0200B

SIZE W50 x T3 - L3200mm

PEMKO® PINSTRIPE EDGING 50x3mm INSTALLATION & APPLICATION


SUBSTRATE Stone / Masonry / Timber / Vinyl



CODE DE0200C / DE0200B

FIXING Adhesive

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



CODE DE0200C / DE0200B

FIXING Adhesive

NOTE *Ensure grout line is
discrete as illustrated*