


PEMKO® PINSTRIPE EDGING 10X50X3MM

P4
GRIP

PRODUCT CODES: DESCRIPTION:

DE0210C	NATURAL ANODISED
DE0210B	BLACK ANODISED

RANGE	Stair Nosing & Edging
DESIGN	Pinstripe
MATERIAL	6063 T5 extruded aluminium alloy
LOCATION	Indoor and Outdoor

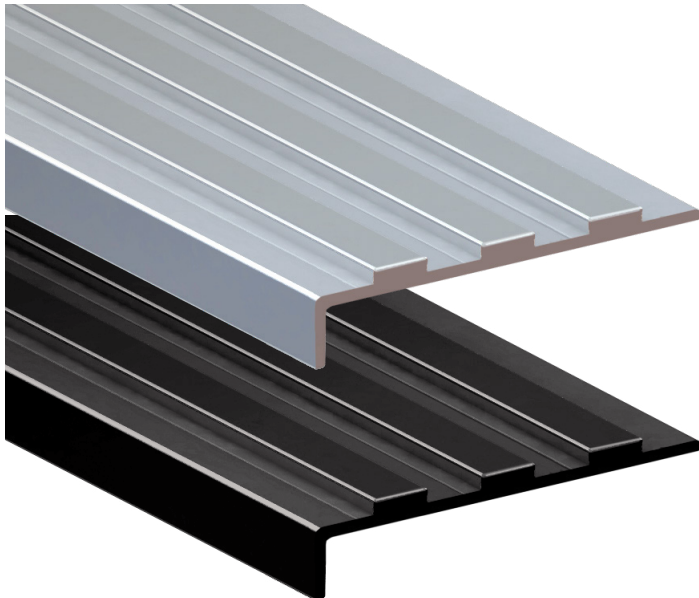

FEATURES & BENEFITS

Extruded intermittent high and low, smooth blunt edge plates designed by DTAC in Australia

Available in exclusive premium quality flat or angle profiles

Suitable for all stable finished indoor or outdoor surfaces and substrates

Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 54 CLASS = P4
TRL 55 SLIDER	= 51 CLASS = P4
TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= 0.55 CLASS = D1
TEST	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
MEAN ANGLE OF INCLINATION	= 31° CLASS = C
TEST	AS 4586 APPENDIX D: Oil/Wet Ramp Test
CORRECTED MEAN OVERALL ACCEPTANCE ANGLE	= 11.6° CLASS = R10

LUMINANCE TESTING


Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
NATURAL	
LIGHT REFLECTANCE VALUE / WET	= 63.31
LIGHT REFLECTANCE VALUE / DRY	= 62.31
BLACK	
LIGHT REFLECTANCE VALUE / WET	= 3.04
LIGHT REFLECTANCE VALUE / DRY	= 4.02

PEMKO® PINSTRIPE
EDGING 10X50X3MM
FINISHES & SIZES

AVAILABLE FINISHES & SIZES

HARD NATURAL ANODISED (25µm)



CODE DE0210C
SIZE H10 x W50 x T3 - L3200mm

HARD BLACK ANODISED (40µm)




CODE DE0210B
SIZE H10 x W50 x T3 - L3200mm

PEMKO® PINSTRIPE EDGING 10X50X3MM

INSTALLATION & APPLICATION


SUBSTRATE Stone / Masonry / Timber / Vinyl



CODE DE0210C / DE0210B

FIXING Adhesive

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



CODE DE0210C / DE0210B

FIXING Adhesive

NOTE Ensure grout line is
discrete as illustrated