


PEMKO® PLEAT EDGING 50X3MM

P5
GRIP

PRODUCT CODES: DESCRIPTION:

DE0300C	NATURAL ANODISED
DE0300B	BLACK ANODISED

RANGE	Stair Nosing & Edging
DESIGN	Pleat
MATERIAL	6063 T5 extruded aluminium alloy
LOCATION	Indoor or outdoor

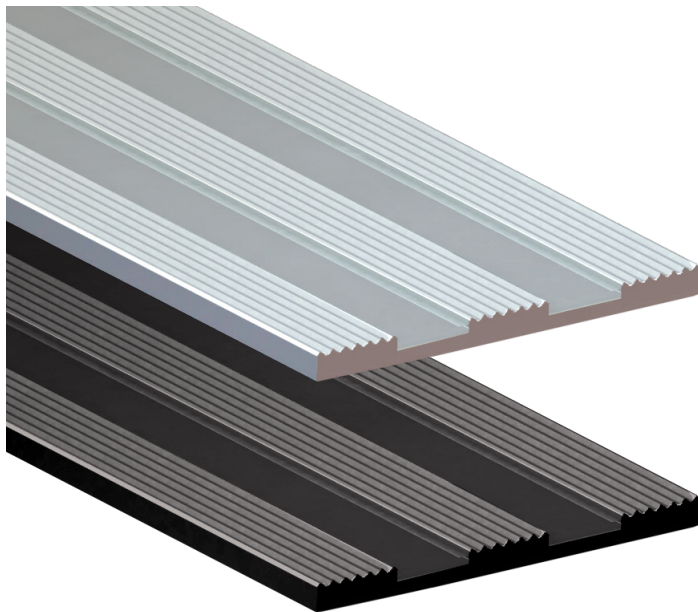

FEATURES & BENEFITS

Extruded intermittent smooth plates encased between a continuous corduroy pattern designed by DTAC in Australia

Available in exclusive premium quality flat or angle profiles

Suitable for all stable finished indoor or outdoor surfaces and substrates

Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST AS 4586 APPENDIX A: Wet Pendulum Test

FOUR S 96 SLIDER = 64 CLASS = P5

TRL 55 SLIDER = 50 CLASS = P5

TEST AS 4586 APPENDIX B: Dry Floor Friction Test

MEAN COF = 0.50 CLASS = D1

TEST AS 4586 APPENDIX C: Wet/Barefoot Ramp Test

MEAN ANGLE OF INCLINATION = 28° CLASS = C

TEST AS 4586 APPENDIX D: Oil/Wet Ramp Test

CORRECTED MEAN OVERALL ACCEPTANCE ANGLE = 27.2° CLASS = R12

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

TEST AS 1428.1 APPENDIX B PARAGRAPH B3

NATURAL

LIGHT REFLECTANCE VALUE / WET = 51.33

LIGHT REFLECTANCE VALUE / DRY = 52.52

BLACK


LIGHT REFLECTANCE VALUE / WET = 3.30

LIGHT REFLECTANCE VALUE / DRY = 3.92

PEMKO® PLEAT EDGING 50X3MM FINISHES & SIZES


AVAILABLE FINISHES & SIZES

HARD NATURAL ANODISED (25µm)



CODE	DE0300C
SIZE	W50 x T3 - L2500mm

HARD BLACK ANODISED (40µm)

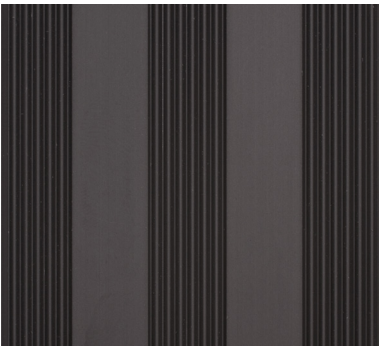


CODE	DE0300B
SIZE	W50 x T3 - L3200mm

PEMKO® PLEAT EDGING 50X3MM

INSTALLATION & APPLICATION


SUBSTRATE Stone / Masonry / Timber / Vinyl



CODE DE0300C / DE0300B

FIXING Adhesive

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



CODE DE0300C / DE0300B

FIXING Adhesive

NOTE Ensure grout line is
discrete as illustrated