


PEMKO® PLEAT EDGING 10X50X3MM



PRODUCT CODES: DESCRIPTION:

NATURAL ANODISED	
BLACK ANODISED	
Stair Nosing & Edging	
Pleat	
6063 T5 extruded aluminium alloy	
Indoor or outdoor	

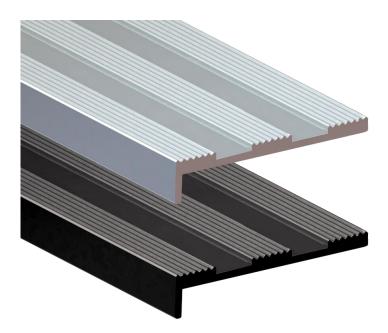

FEATURES & BENEFITS

Extruded intermittent smooth plates encased between a continuous corduroy pattern designed by DTAC in Australia

Available in exclusive premium quality flat or angle profiles

Suitable for all stable finished indoor or outdoor surfaces and substrates

Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 64 CLASS = P5
TRL 55 SLIDER	= 50 CLASS = P5
TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= 0.50 CLASS = D1
TEST	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
MEAN ANGLE OF INCI	LINATION = 28° CLASS = C
TEST	AS 4586 APPENDIX D: Oil/Wet Ramp Test

CORRECTED MEAN OVERALL ACCEPTANCE ANGLE $= 27.2^{\circ}$ CLASS = R12

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

TEST	AS 1428.1 APPEN	IDIX B PARAGRAPH B3
NATURAL		
LIGHT REFLECTANCE	VALUE / WET	= 51.33
LIGHT REFLECTANCE	VALUE / DRY	= 52.52
BLACK		
LIGHT REFLECTANCE	VALUE / WET	= 3.30
LIGHT REFLECTANCE	VALUE / DRY	= 3.92

DTAC PTY LTD ABN 41 093 070 127

Unit 4, 11-12 Phillip Court Port Melbourne Victoria Australia 3207 PO Box 5059 South Melbourne Victoria Australia 3205

PEMK0[®] T 1300 793 478 estimating@dtac.com.au dtac.com.au

© DTAC Pty Ltd 2025





PEMKO® PLEAT EDGING 10X50X3MM

FINISHES & SIZES

AVAILABLE FINISHES & SIZES


HARD NATURAL ANODISED (25µm)





CODE	DE0310C
SIZE	H10 x W50 x T3 - L3200mm

HARD BLACK ANODISED (40µm)





CODE	DE0310B	
SIZE	H10 x W50 x T3 - L3200mm	




PEMKO® PLEAT EDGING 10X50X3MM

INSTALLATION & APPLICATION

SUBSTRATE

Stone / Masonry / Timber / Vinyl




CODE DE0310C/DE0310B

FIXING Adhesive

SUBSTRATE

Vitrified Porcelain / Ceramics / Glass / Metals



CODE DE0310C/DE0310B

FIXING Adhesive

NOTE Ensure grout line is discrete as illustrated