

# PEMKO® RUGGED™ EDGING 10x70x3mm

P5  
GRIP

## PRODUCT CODES: DESCRIPTION:

|          |        |
|----------|--------|
| DEF0010Y | YELLOW |
|----------|--------|

|       |                       |
|-------|-----------------------|
| RANGE | Stair Nosing & Edging |
|-------|-----------------------|

|        |         |
|--------|---------|
| DESIGN | Rugged™ |
|--------|---------|

|          |                                |
|----------|--------------------------------|
| MATERIAL | Fibre Glass Reinforced Polymer |
|----------|--------------------------------|

|          |                   |
|----------|-------------------|
| LOCATION | Indoor or outdoor |
|----------|-------------------|

## FEATURES & BENEFITS

Continuous band of hard wearing, fibre glass reinforced polymer extrusion

Available in exclusive premium quality angle profiles

Suitable for all stable finished outdoor or indoor surfaces and substrates

Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

|      |                                       |
|------|---------------------------------------|
| TEST | AS 4586 APPENDIX A: Wet Pendulum Test |
|------|---------------------------------------|

|                  |                 |
|------------------|-----------------|
| FOUR S 96 SLIDER | = 72 CLASS = P5 |
|------------------|-----------------|

## LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

|      |                                   |
|------|-----------------------------------|
| TEST | AS 1428.1 APPENDIX B PARAGRAPH B3 |
|------|-----------------------------------|

|                               |         |
|-------------------------------|---------|
| LIGHT REFLECTANCE VALUE / WET | = 40.87 |
|-------------------------------|---------|


|                               |         |
|-------------------------------|---------|
| LIGHT REFLECTANCE VALUE / DRY | = 41.71 |
|-------------------------------|---------|



# PEMKO® RUGGED™ EDGING 10X70X3MM FINISHES & SIZES

## AVAILABLE FINISHES & SIZES


### YELLOW

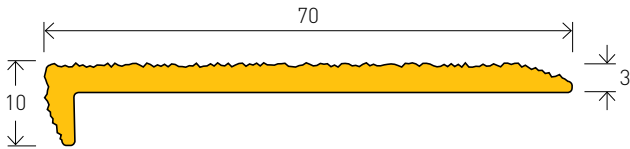

|             |                          |
|-------------|--------------------------|
| <b>CODE</b> | DEF0010Y                 |
| <b>SIZE</b> | H10 x W70 x T3 - L3200mm |

# PEMKO® RUGGED™ EDGING 10x70x3mm INSTALLATION & APPLICATION


**SUBSTRATE** Stone / Masonry / Timber / Vinyl



**CODE** DEF0010Y

**FIXING** Adhesive

**SUBSTRATE** Vitrified Porcelain / Ceramics / Glass




**CODE** DEF0010Y

**FIXING** Adhesive

**NOTE** *Ensure grout line is  
discrete as illustrated*

**SUBSTRATE** Metals



**CODE** DEF0010Y

**FIXING** Screw-fixed

**NOTE** *Screw-fixed onto metal  
stairs and gratings (fixings  
not supplied).*