

PEMKO® URBAN EDGING 10X65X5MM (BLACK / NATURAL)

P5
GRIP

PRODUCT CODES: DESCRIPTION:


DE0700BMF **NATURAL ANODISED**
Black silicon carbide infill

RANGE Stair Nosing & Edging

DESIGN Urban

MATERIAL 6063 T5 extruded aluminium alloy with silicon carbide infill

LOCATION Indoor or outdoor

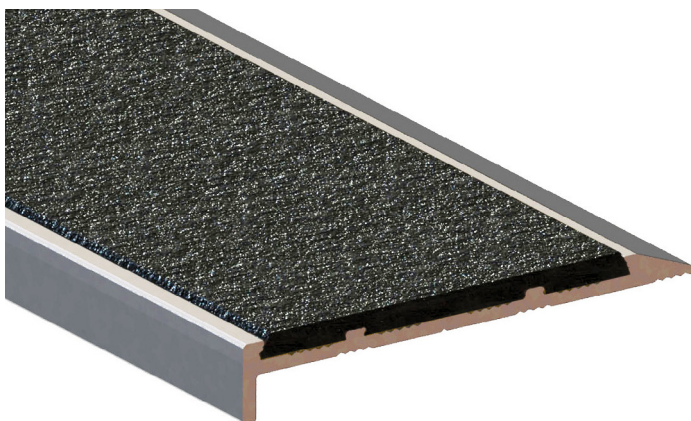

FEATURES & BENEFITS

Continuous band of hard wearing, solid silicon carbide inserted into aluminium extrusions designed by DTAC in Australia

Available in an exclusive premium quality angle profile

Suitable for all stable finished outdoor or indoor surfaces and substrates

Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST AS 4586 APPENDIX A: Wet Pendulum Test

FOUR S 96 SLIDER = 78 **CLASS** = P5

TEST AS 4586 APPENDIX B: Dry Floor Friction Test

MEAN COF = 0.90 **CLASS** = D1

TEST AS 4586 APPENDIX C: Wet/Barefoot Ramp Test

MEAN ANGLE OF INCLINATION = 36° **CLASS** = C

TEST AS 4586 APPENDIX D: Oil/Wet Ramp Test

CORRECTED MEAN OVERALL ACCEPTANCE ANGLE = 36° **CLASS** = R13

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

TEST AS 1428.1 APPENDIX B PARAGRAPH B3


LIGHT REFLECTANCE VALUE / WET = 2.58

LIGHT REFLECTANCE VALUE / DRY = 3.07

PEMKO® URBAN EDGING 10X65X5MM (BLACK / NATURAL) FINISHES & SIZES

AVAILABLE FINISHES & SIZES

HARD NATURAL ANODISED (25µm) WITH BLACK INFILL

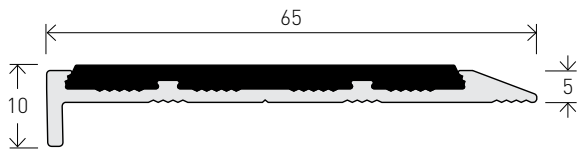


CODE DE0700BMF

SIZE H10 x W65 x T5 - L3200mm


PEMKO® URBAN EDGING 10X65X5MM (BLACK / NATURAL) INSTALLATION & APPLICATION

SUBSTRATE Stone / Masonry / Timber / Vinyl



CODE DE0700BMF


FIXING Adhesive.
Optional screw-fix
(Screws* and plugs
available upon request)



CODE DE0700BMF

FIXING Adhesive only


SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



CODE DE0700BMF

FIXING Adhesive.
Optional screw-fix
(Screws* and plugs
available upon request)

NOTE Ensure grout line is
discrete as illustrated



CODE DE0700BMF

FIXING Adhesive only

NOTE Ensure grout line is
discrete as illustrated

* Screw heads will be visible as the
Silicon Carbide Infill is not a
removable item.