BRASS CLASSIC CARPET TACTILE SYSTEM

P5
GRIP

PRODUCT CODES:	DESCRIPTION:
DT0303	**LOW PILE CARPET**
DT0306	**HIGH PILE CARPET**

RANGE	Carpet Tactile System
DESIGN	Classic
MATERIAL	Solid brass
LOCATION	Indoor
DIMENSIONS	**OUTER DIA:** 35mm **TOP DIA:** 25mm **THICKNESS:** 5mm



FEATURES & BENEFITS

Machined, concentric circle design on the horizontal face with a smooth outer edge

Complies with the NCC (D4D9 Tactile Indicators) and Disability (Access to Premises—Buildings) standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

Identifiable by the unique "double lip" design, providing a distinct advantage when it comes to high slip resistance

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 106 **CLASS** = P5
TRL 55 SLIDER	= 83 **CLASS** = P5
TEST	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
MEAN ANGLE OF INCLINATION	= 27° **CLASS** = C
TEST	AS 4586 APPENDIX D: Oil/Wet Ramp Test
CORRECTED MEAN OVERALL ACCEPTANCE ANGLE	= 33° **CLASS** = R12

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSI, see: AS/NZS 1428.4.1:2009.

TEST	AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3
LIGHT REFLECTANCE VALUE / WET	= 52.90
LIGHT REFLECTANCE VALUE / DRY	= 55.09

DTAC PTY LTD
ABN 41 093 070 127

Unit 4, 11-12 Phillip Court
Port Melbourne Victoria
Australia 3207

PO Box 5059
South Melbourne Victoria
Australia 3205


PEMKO®
T 1300 793 478

estimating@dtac.com.au
dtac.com.au


© DTAC Pty Ltd 2025

BRASS CLASSIC CARPET TACTILE SYSTEM
INSTALLATION & APPLICATION


SUBSTRATE Carpet / Carpet Tiles



CODE	DT0303
FIXING	Screw
NOTE	*3mm clearance to accept thin carpet without underlay (direct stick carpet/carpet tiles). Two stage installation process*



CODE	DT0306
FIXING	Screw
NOTE	*6mm clearance to accept thick carpet with underlay (broad loom/natural sisal carpets). Two stage installation process*

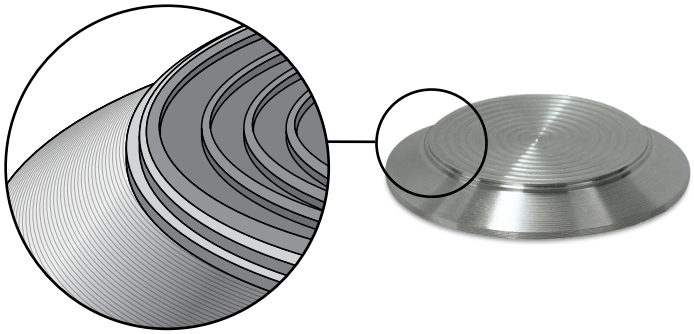

THE DTAC DIFFERENCE

DTAC Warning Tactiles are identifiable by the unique "double lip" design, providing a distinct advantage when it comes to high slip resistance.

Warning Tactile's are a series of raised dots that are installed on pedestrian surfaces. They assist in the orientation of the vision impaired and give tactile warning so they may safely navigate the built environment.

With an extensive range of designs and colours, DTAC work closely with architects, specifiers and builders to exceed design and aesthetic expectations on every project.

- Available in a range of colours and designs to suit all applications
- Solutions for all stable surfaces and substrates
- Designed to comply with building codes and regulations
- Tested for luminance and slip resistance requirements.