


PEMKO® TWEED EDGING 10X50X3MM

P5
GRIP

PRODUCT CODES: DESCRIPTION:

DE0610C	NATURAL ANODISED
DE0610B	BLACK ANODISED

RANGE	Stair Nosing & Edging
DESIGN	Tweed
MATERIAL	6063 T5 extruded aluminium alloy
LOCATION	Indoor or outdoor

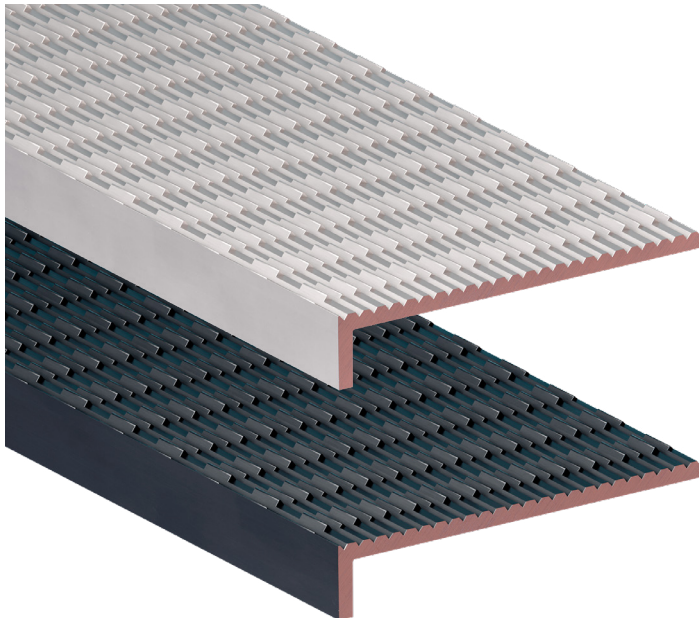

FEATURES & BENEFITS

Stamped pattern engineered for multi-directional slip resistance, designed by DTAC in Australia.

Available in exclusive premium quality flat or angle profiles

Suitable for all stable finished indoor or outdoor surfaces and substrates

Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
TRL 55 SLIDER	= 62* CLASS = P5

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
NATURAL	
LIGHT REFLECTANCE VALUE / WET	= 43.84
LIGHT REFLECTANCE VALUE / DRY	= 43.92
BLACK	
LIGHT REFLECTANCE VALUE / WET	= 1.33
LIGHT REFLECTANCE VALUE / DRY	= 1.76

*Based on Natural Anodised



PEMKO® TWEED

EDGING 10X50X3MM

FINISHES & SIZES


AVAILABLE FINISHES & SIZES

HARD NATURAL ANODISED (25µm)

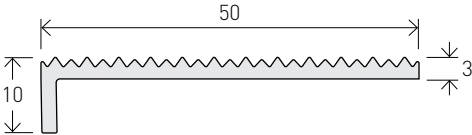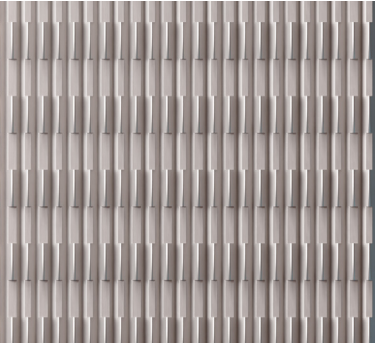

CODE	DE0610C
SIZE	H10 x W50 x T3 - L3200mm

HARD BLACK ANODISED (40µm)

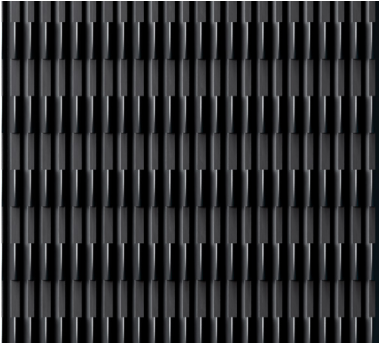


CODE	DE0610B
SIZE	H10 x W50 x T3 - L3200mm

PEMKO® TWEED

EDGING 10X50X3MM

INSTALLATION & APPLICATION


SUBSTRATE Stone / Masonry / Timber / Vinyl



CODE DE0610C / DE0610B

FIXING Adhesive

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



CODE DE0610C / DE0610B

FIXING Adhesive

NOTE Ensure grout line is
discrete as illustrated