

PEMKO® TWEED EDGING 50X3MM

**P5
GRIP**

PRODUCT CODES: DESCRIPTION:


DE0600C	NATURAL ANODISED
DE0600B	BLACK ANODISED

RANGE Stair Nosing & Edging

DESIGN Tweed

MATERIAL 6063 T5 extruded aluminium alloy

LOCATION Indoor or outdoor

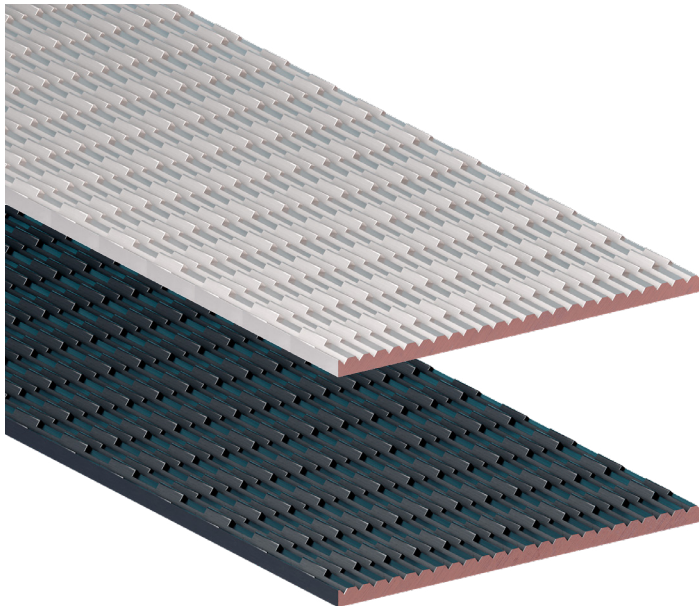

FEATURES & BENEFITS

Stamped pattern engineered for multi-directional slip resistance, designed by DTAC in Australia.

Available in exclusive premium quality flat, angle or carpet profiles

Suitable for all stable finished indoor or outdoor surfaces and substrates

Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
TRL 55 SLIDER	= 62* CLASS = P5

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
NATURAL	
LIGHT REFLECTANCE VALUE / WET	= 48.25
LIGHT REFLECTANCE VALUE / DRY	= 47.50
BLACK	
LIGHT REFLECTANCE VALUE / WET	= 1.82
LIGHT REFLECTANCE VALUE / DRY	= 2.34

**Based on Natural Anodised*



PEMKO® TWEED

EDGING 50X3MM

FINISHES & SIZES


AVAILABLE FINISHES & SIZES

HARD NATURAL ANODISED (25µm)

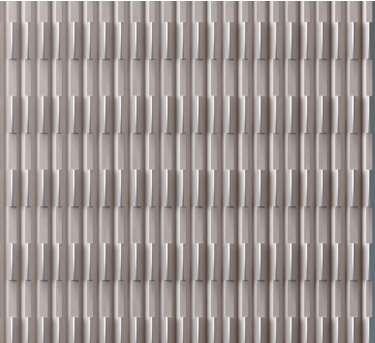

CODE	DE0600C
SIZE	W50 x T3 - L2500mm


HARD BLACK ANODISED (40µm)

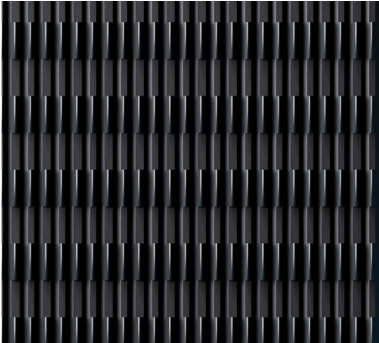

CODE	DE600B
SIZE	W50 x T3 - L3200mm

PEMKO® TWEED EDGING 50X3MM INSTALLATION & APPLICATION


SUBSTRATE Stone / Masonry / Timber / Vinyl



CODES DE0600C / DE0600B

FIXING Adhesive

SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



CODES DE0600C / DE0600B

FIXING Adhesive

NOTE Ensure grout line is
discrete as illustrated

NOTE This installation method is
not always recommended
due to the riser tile not
being level with the tread.
Flat nosing can be
installed up to 15mm back
from the front edge.