

# SILICON CARBIDE CLASSIC WARNING TACTILE

P5  
GRIP

## PRODUCT CODES: DESCRIPTION:

DT0212 SPIKED

DT0213 FLAT

RANGE Warning Tactile

DESIGN Classic Silicon Carbide

MATERIAL 316 marine grade stainless steel with silicon carbide infill

LOCATION Indoor or outdoor

DIMENSIONS OUTER DIA: 35mm TOP DIA: 25mm  
THICKNESS: 5mm

## FEATURES & BENEFITS

Hard wearing silicon carbide inserted into the horizontal face with a smooth machined outer edge

Complies with the NCC [D4D9 Tactile Indicators] and Disability (Access to Premises—Buildings) standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

Identifiable by the unique "double lip" design, providing a distinct advantage when it comes to high slip resistance

## SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST AS 4586 APPENDIX A: Wet Pendulum Test

FOUR S 96 SLIDER = 79 CLASS = P5

TRL 55 SLIDER = 77 CLASS = P5

## LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSI, see: AS/NZS 1428.4.1:2009.

TEST AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3


LIGHT REFLECTANCE VALUE / WET = 4.00

LIGHT REFLECTANCE VALUE / DRY = 5.20



# SILICON CARBIDE CLASSIC WARNING TACTILE INSTALLATION & APPLICATION


**SUBSTRATE** Stone / Masonry / Timber / Vinyl



**CODE** DT0212

**FIXING** Drill and pressure fit  
(M8 x 25mm hole)

**SUBSTRATE** Vitrified Porcelain / Ceramics / Glass / Metals




**CODE** DT0212

**FIXING** Drill and pressure fit  
(M8 x 25mm hole)



**CODE** DT0213

**FIXING** Adhesive

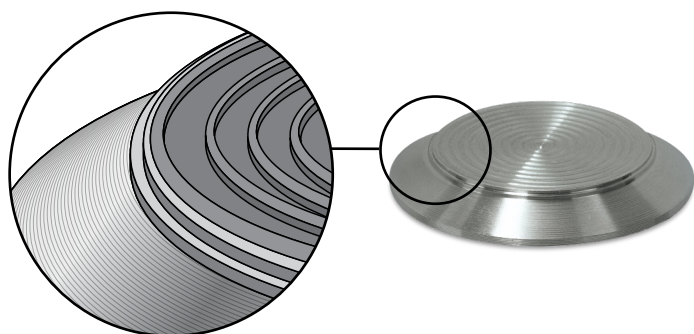

## THE DTAC DIFFERENCE

DTAC Warning Tactiles are identifiable by the unique “double lip” design, providing a distinct advantage when it comes to high slip resistance.

Warning Tactile's are a series of raised dots that are installed on pedestrian surfaces. They assist in the orientation of the vision impaired and give tactile warning so they may safely navigate the built environment.

With an extensive range of designs and colours, DTAC work closely with architects, specifiers and builders to exceed design and aesthetic expectations on every project.

- Available in a range of colours and designs to suit all applications
- Solutions for all stable surfaces and substrates
- Designed to comply with building codes and regulations
- Tested for luminance and slip resistance requirements.