

PEMKO® MODULAR + RUGGED SURFACE EDGING SYSTEM 10X63X4MM

P5
GRIP

PRODUCT CODES: DESCRIPTION:

DE0550B **NATURAL ANODISED**
With black insert

RANGE	Stair Nosing & Edging
DESIGN	Modular Surface + Rugged
MATERIAL	6063 T5 extruded aluminium alloy
LOCATION	Indoor or Outdoor

FEATURES & BENEFITS

An extruded aluminium holder designed for tiled stairs, that allows the insertion of stair edging products using double-sided self-adhesive tape to offer customisation of colour and contrast

Supplied with DTAC PEMKO® Rugged Edging 50x3mm

Offers both adhesive and screw-fix options, with screw heads concealed under the inserted edging for a concealed fix

Designed by DTAC in Australia

Suitable for all stable finished outdoor or indoor surfaces and substrates

Complies with the NCC [D4D4 Parts of buildings to be accessible] where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

SLIP RESISTANCE TESTING


Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST AS 4586 APPENDIX A: Wet Pendulum Test
TRL 55 SLIDER = 85 **CLASS** = P5

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC EDGING, see: AS 1428.1:2009.


TEST AS 1428.1 APPENDIX B PARAGRAPH B3
LIGHT REFLECTANCE VALUE / WET = 3.82
LIGHT REFLECTANCE VALUE / DRY = 4.18

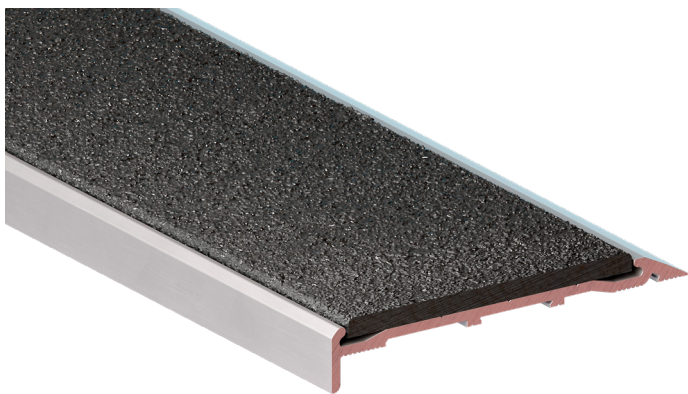

PEMKO® MODULAR + RUGGED SURFACE EDGING SYSTEM 10X63X4MM FINISHES & SIZES

AVAILABLE FINISHES & SIZES

HARD BLACK ANODISED (40µm)

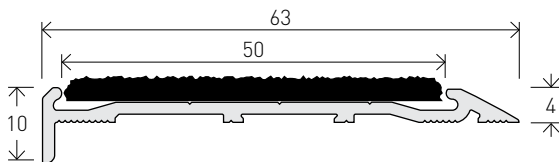


CODE DE0550B

SIZE H10 x W63 x T4 - L3200mm


PEMKO® MODULAR + RUGGED SURFACE EDGING SYSTEM 10X63X4MM INSTALLATION & APPLICATION

SUBSTRATE Stone / Masonry / Timber / Vinyl



CODE DE0550B


FIXING Adhesive.
Optional screw-fix
(Screws and plugs
available upon request)



CODE DE0550B

FIXING Adhesive only


SUBSTRATE Vitrified Porcelain / Ceramics / Glass / Metals



CODE DE0550B

FIXING Adhesive.
Optional screw-fix
(Screws and plugs
available upon request)

NOTE Ensure grout line is discrete
as illustrated



CODE DE0550B

FIXING Adhesive only

NOTE Ensure grout line is discrete
as illustrated